

PRODUCT FAMILY DATASHEET

LED STRIP PERFORMANCE-600

High performance LED strips with 600 lm/m for high requirements



AREAS OF APPLICATION

- General indoor illumination
- Industry
- Offices, retail outlets and conference rooms
- Architecture lighting
- Decorative illumination

PRODUCT BENEFITS

- Great scope of design options due to long and flexible LED strips
- Easy installation, no tools required for connection
- Easy mounting on many smooth surfaces thanks to self-adhesive tape
- Maximum flexibility due to large range of accessories
- Simple connection thanks to integrated cables on both sides

PRODUCT FEATURES

- Flexible and cuttable LED strip
- Smallest cuttable unit: 100 mm
- Lifetime (L70/B50): up to 35,000 h at Tc max.: 75°C
- Luminous flux: 600 lm/m
- Color rendering index R_a : > 80
- Initial color consistency: ≤ 4 SDCM
- Large range of color temperatures: from warm white to cool daylight



- Dimmable with suitable drivers, see also www.ledvance.com/dim

TECHNICAL DATA

Electrical data

Product description	Rated wattage	Nominal wattage	Nominal wattage per meter	Nominal voltage	Input voltage range	Reverse Voltage
LS PFM -600/827/5	27.00 W	27.00 W	5.4 W	24 V ¹⁾	23...25 V ¹⁾	25 V ¹⁾
LS PFM -600/830/5	27.00 W	27.00 W	5.4 W	24 V ¹⁾	23...25 V ¹⁾	25 V ¹⁾
LS PFM -600/840/5	27.00 W	27.00 W	5.4 W	24 V ¹⁾	23...25 V ¹⁾	25 V ¹⁾
LS PFM -600/865/5	27.00 W	27.00 W	5.4 W	24 V ¹⁾	23...25 V ¹⁾	25 V ¹⁾

¹⁾V_{DC}

Photometrical data

Product description	Color temperature	Standard deviation of color matching	Color rendering index Ra	Light color LED	Luminous flux per meter	Luminous flux	Luminous efficacy
LS PFM -600/827/5	2700 K	≤4 sdc	>80	Warm white	690 lm	3450 lm	127.8 lm/W
LS PFM -600/830/5	3000 K	≤4 sdc	>80	White	700 lm	3500 lm	129.6 lm/W
LS PFM -600/840/5	4000 K	≤4 sdc	>80	Cool white	750 lm	3750 lm	138.9 lm/W
LS PFM -600/865/5	6500 K	≤4 sdc	>80	Daylight	750 lm	3750 lm	138.9 lm/W

Light technical data

Product description	Beam angle
LS PFM -600/827/5	120 °
LS PFM -600/830/5	120 °
LS PFM -600/840/5	120 °
LS PFM -600/865/5	120 °

LED module information


Product description	Number of LEDs per meter	Number of LEDs per module	Number of LEDs per smallest unit
LS PFM -600/827/5	70	350	7
LS PFM -600/830/5	70	350	7
LS PFM -600/840/5	70	350	7
LS PFM -600/865/5	70	350	7

Dimensions & weight

Product description	LED pitch	Length	Width	Height	Cable length
LS PFM -600/827/5	14.3 mm	5000 mm	8.00 mm	1.40 mm	500 mm
LS PFM -600/830/5	14.3 mm	5000 mm	8.00 mm	1.40 mm	500 mm
LS PFM -600/840/5	14.3 mm	5000 mm	8.00 mm	1.40 mm	500 mm
LS PFM -600/865/5	14.3 mm	5000 mm	8.00 mm	1.40 mm	500 mm

Product description	Product weight	Short pitch	Conductor cross section	Prewired
LS PFM -600/827/5	80.00 g	No	0.5 mm ²	Yes
LS PFM -600/830/5	80.00 g	No	0.5 mm ²	Yes
LS PFM -600/840/5	80.00 g	No	0.5 mm ²	Yes
LS PFM -600/865/5	80.00 g	No	0.5 mm ²	Yes

Product line drawing

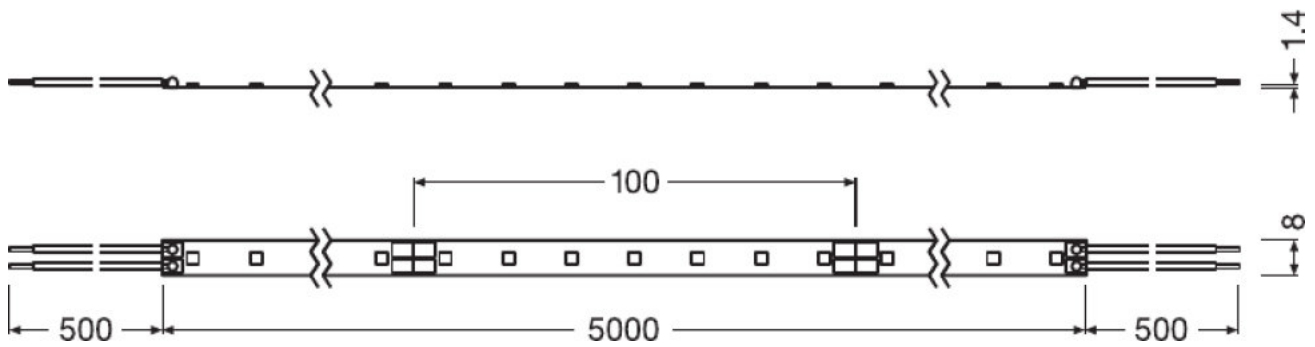

LS PFM -600/827/5, LS PFM -600/830/5, LS PFM -600/840/5, LS PFM -600/865/5

Temperatures & operating conditions

Product description	Ambient temperature range	Temperature range in operation	Maximum temperature at tc test point
LS PFM -600/827/5	-15...+45 °C ¹⁾	-15...+75 °C ²⁾	75 °C ³⁾
LS PFM -600/830/5	-15...+45 °C ¹⁾	-15...+75 °C ²⁾	75 °C ³⁾
LS PFM -600/840/5	-15...+45 °C ¹⁾	-15...+75 °C ²⁾	75 °C ³⁾
LS PFM -600/865/5	-15...+45 °C ¹⁾	-15...+75 °C ²⁾	75 °C ³⁾

¹⁾ Providing that temperature at Tc point is below max value during operation

2) At the T_c point

3) Exceeding the maximum specified ratings can reduce expected life time or destroy the LED strip

Lifespan

Product description	Lifespan
LS PFM -600/827/5	35000 h ¹⁾
LS PFM -600/830/5	35000 h ¹⁾
LS PFM -600/840/5	35000 h ¹⁾
LS PFM -600/865/5	35000 h ¹⁾

¹⁾ L70/B50 at T_c max. 75 °C

Capabilities

Product description	Lowest bending radius	Self-adhesive	Dimmable	Reverse polarity protection
LS PFM -600/827/5	25 mm	Yes	Yes ¹⁾	Yes ²⁾
LS PFM -600/830/5	25 mm	Yes	Yes ¹⁾	Yes ²⁾
LS PFM -600/840/5	25 mm	Yes	Yes ¹⁾	Yes ²⁾
LS PFM -600/865/5	25 mm	Yes	Yes ¹⁾	Yes ²⁾

¹⁾ Dimmable with suitable drivers, see also www.ledvance.com/dim

²⁾ Up to maximum 25 V_{DC}

Certificates & standards

Product description	Salt mist resistance acc. IEC 60068-2-52	UV resistance acc. IEC 60068-2-5	Energy consumption	Energy efficiency class	Type of protection
LS PFM -600/827/5	No	No	30 kWh/1000h	A+ ¹⁾	IP00
LS PFM -600/830/5	No	No	30 kWh/1000h	A+ ¹⁾	IP00
LS PFM -600/840/5	No	No	30 kWh/1000h	A++ ¹⁾	IP00
LS PFM -600/865/5	No	No	30 kWh/1000h	A++ ¹⁾	IP00


Product description	Standards
LS PFM -600/827/5	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
LS PFM -600/830/5	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
LS PFM -600/840/5	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
LS PFM -600/865/5	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547

¹⁾ Applicable on entire product

Logistical data

Product description	Temperature range at storage
LS PFM -600/827/5	-35...+85 °C
LS PFM -600/830/5	-35...+85 °C
LS PFM -600/840/5	-35...+85 °C
LS PFM -600/865/5	-35...+85 °C

Light Distribution

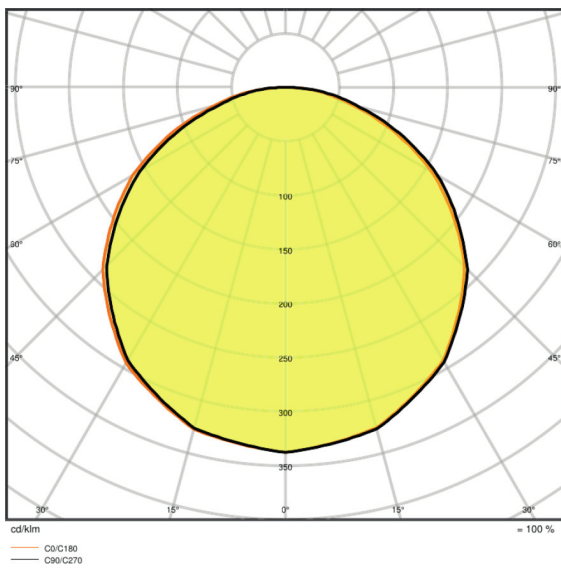

LS PFM -600/830/5

EQUIPMENT / ACCESSORIES

- Connectors, profiles and covers for several mounting options available

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

ADDITIONAL PRODUCT INFORMATION

- All the technical parameters apply to the entire LED module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.

- All LED strips have a self-adhesive tape on the reverse side. LED strips can be attached to suitable materials, e.g. aluminum profiles. The surface of the material must be free of grease, oil, silicone and dirt particles. The adhesive tape can be used only one time, if the LED strip will be removed from the mounting surface, there could be a damage of the LED strips and the mounting material. The surface temperature of the mounting material should be in the temperature range of 18°C...35°C. Complete adhesion takes up to 72 h.
- According IPC 6013C – Use A the LED strips are designed for static installation. Vibrations, respective torsion and elongation/compression must be considered.
- In a wide temperature range operation field (e.g. outdoor installation) and a LED strip length with more than 2m suitable mounting surface is required. To avoid stress due to mismatch in expansion of the different materials, there should be an extra thicker adhesive tape between LED strip and mounting surface. Additionally, the LED strip should have enough space for thermal expansion at higher temperatures.
- Compensation due to chemical corrosion is excluded. A suitable protection against corrosive agents such as moisture, condensation etc. must be provided. Hydrogen sulfide (H2S) will cause an accelerated corrosion which leads to shortened lifetime or premature failure.
- IP00 LED strips have not surface coating. Consequently, they have no protection against contact and corrosion.
- Installation of the LED strip has to be done by a qualified electrician.
- Handle with care to avoid mechanical product damage
- If the maximum operating and storage temperature ratings will be exceeded, the expected lifetime will be reduced or even the LED strip will be destroyed. It is not allowed to operate the LED strip over the specified Tc temperature (acc. EN 60598-1 under steady state conditions)
- It is not allowed to exceed the maximum operation voltage. This could cause a hazardous overload and will destroy the LED strip.
- The applicable electrical and safety standards have to be maintained for a LED strip installations
- Pay attention on correct polarity. Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Galvanic Insulation between LED strip and mounting surface must be ensured. This Insulation is needed especially in the area of connections or cut ends.
- In installations of LED strips ESD safety must be taken in account. Adequate precautions during installation and operation for the products are required.
- LED strip can be operated only by a SELV LED driver, which comply with the applicable lighting standards and fits to LED strips rating. A safety operation of the LED strips require a SELV LED driver with an electronically stabilized power supply protection against short circuits, overload and overheating.
- To avoid a damage of the LED strip, the unmounted LED strip should be handled and stored only in the original LEDVANCE packaging (wheel / ESD bag). Repacking is not allowed. Cutted IP 6x LED strips can be stored only with mounted endcaps.

SALES AND TECHNICAL SUPPORT

Sales and Technical Support www.ledvance.com

COUNTRY SPECIFIC INFORMATION

Product description	Product code	METEL-Code	SEG-No.	STK number	UK Org
LS PFM -600/827/5	4058075236400	-	-	4231964	-
LS PFM -600/830/5	4058075236448	-	-	4231965	-
LS PFM -600/840/5	4058075236486	-	-	4231966	-
LS PFM -600/865/5	4058075236547	-	-	4231967	-

DOWNLOAD DATA

File

	User instruction LED STRIP PERFORMANCE IP00
	Declarations of conformity EU Declaration of conformity 3563397 LS PFM

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075236417	Shipping carton box 10	260 mm x 260 mm x 265 mm	3101.00 g	17.91 dm ³
4058075236455	Shipping carton box 10	260 mm x 260 mm x 265 mm	3101.00 g	17.91 dm ³
4058075236493	Shipping carton box 10	260 mm x 260 mm x 265 mm	3101.00 g	17.91 dm ³
4058075236554	Shipping carton box 10	260 mm x 260 mm x 265 mm	3101.00 g	17.91 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ACCESSORIES MANDATORY

Product description	Accessory name	Accessory code
LS PFM -600/827/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS PFM -600/827/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS PFM -600/827/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS PFM -600/827/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS PFM -600/827/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS PFM -600/827/5	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS PFM -600/827/5	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS PFM -600/827/5	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS PFM -600/827/5	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS PFM -600/827/5	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS PFM -600/827/5	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS PFM -600/827/5	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS PFM -600/827/5	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS PFM -600/827/5	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS PFM -600/830/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS PFM -600/830/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS PFM -600/830/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS PFM -600/830/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS PFM -600/830/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS PFM -600/830/5	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063

LS PFM -600/830/5	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS PFM -600/830/5	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS PFM -600/830/5	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS PFM -600/830/5	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS PFM -600/830/5	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS PFM -600/830/5	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS PFM -600/830/5	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS PFM -600/830/5	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS PFM -600/840/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS PFM -600/840/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS PFM -600/840/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS PFM -600/840/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS PFM -600/840/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS PFM -600/840/5	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS PFM -600/840/5	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS PFM -600/840/5	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS PFM -600/840/5	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS PFM -600/840/5	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS PFM -600/840/5	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS PFM -600/840/5	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS PFM -600/840/5	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS PFM -600/840/5	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS PFM -600/865/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS PFM -600/865/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS PFM -600/865/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS PFM -600/865/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS PFM -600/865/5	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS PFM -600/865/5	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS PFM -600/865/5	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS PFM -600/865/5	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS PFM -600/865/5	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS PFM -600/865/5	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS PFM -600/865/5	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS PFM -600/865/5	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS PFM -600/865/5	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS PFM -600/865/5	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920

ACCESSORIES OPTIONAL

Product description	Accessory name	Accessory code
LS PFM -600/827/5	LED Strip Performance Connectors, -CP/P2/500	▶ 4058075272217
LS PFM -600/827/5	LED Strip Performance Connectors, -CSD/P2	▶ 4058075275409
LS PFM -600/827/5	LED Strip Performance Connectors, -CSW/P2/50	▶ 4058075272248
LS PFM -600/827/5	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS PFM -600/827/5	LED Strip Performance Connectors, -8/SMB	▶ 4058075275652
LS PFM -600/827/5	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS PFM -600/827/5	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS PFM -600/827/5	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS PFM -600/827/5	LED Strip Profiles Flat, -PF01/UW/22X6/10/1	▶ 4058075278219
LS PFM -600/827/5	LED Strip Profiles Flat, -PF02/U/16X5/10/1	▶ 4058075278240
LS PFM -600/827/5	LED Strip Profiles Flat, -PF03/UW/25X7/12/1	▶ 4058075278271
LS PFM -600/827/5	LED Strip Profiles Flat, -PF04/U/17X7/12/1	▶ 4058075278301
LS PFM -600/827/5	LED Strip Profiles Medium, -PM01/UW/21,5X12/10/1	▶ 4058075278332
LS PFM -600/827/5	LED Strip Profiles Medium, -PM02/R/18X15,5/10/1	▶ 4058075278363
LS PFM -600/827/5	LED Strip Profiles Medium, -PM03/E/19X19/10/1	▶ 4058075278394
LS PFM -600/827/5	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS PFM -600/827/5	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS PFM -600/827/5	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS PFM -600/827/5	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS PFM -600/827/5	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS PFM -600/827/5	LED Strip Profiles Flat, -PF01/UW/22X6/10/2	▶ 4058075401556
LS PFM -600/827/5	LED Strip Profiles Flat, -PF02/U/16X5/10/2	▶ 4058075401587
LS PFM -600/827/5	LED Strip Profiles Flat, -PF03/UW/25X7/12/2	▶ 4058075401617
LS PFM -600/827/5	LED Strip Profiles Flat, -PF04/U/17X7/12/2	▶ 4058075401648
LS PFM -600/827/5	LED Strip Profiles Medium, -PM01/UW/21,5X12/10/2	▶ 4058075401679
LS PFM -600/827/5	LED Strip Profiles Medium, -PM02/R/18X15,5/10/2	▶ 4058075401709
LS PFM -600/827/5	LED Strip Profiles Medium, -PM03/E/19X19/10/2	▶ 4058075401730
LS PFM -600/827/5	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/2	▶ 4058075401761
LS PFM -600/827/5	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/2	▶ 4058075401792
LS PFM -600/827/5	LED Strip Profiles Medium, -PM06/E/18X18/12/2	▶ 4058075401822
LS PFM -600/830/5	LED Strip Performance Connectors, -CP/P2/500	▶ 4058075272217
LS PFM -600/830/5	LED Strip Performance Connectors, -CSD/P2	▶ 4058075275409
LS PFM -600/830/5	LED Strip Performance Connectors, -CSW/P2/50	▶ 4058075272248
LS PFM -600/830/5	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS PFM -600/830/5	LED Strip Performance Connectors, -8/SMB	▶ 4058075275652
LS PFM -600/830/5	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS PFM -600/830/5	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS PFM -600/830/5	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189

LS PFM -600/830/5	LED Strip Profiles Flat, -PF01/UW/22X6/10/1	▶ 4058075278219
LS PFM -600/830/5	LED Strip Profiles Flat, -PF02/U/16X5/10/1	▶ 4058075278240
LS PFM -600/830/5	LED Strip Profiles Flat, -PF03/UW/25X7/12/1	▶ 4058075278271
LS PFM -600/830/5	LED Strip Profiles Flat, -PF04/U/17X7/12/1	▶ 4058075278301
LS PFM -600/830/5	LED Strip Profiles Medium, -PM01/UW/21,5X12/10/1	▶ 4058075278332
LS PFM -600/830/5	LED Strip Profiles Medium, -PM02/R/18X15,5/10/1	▶ 4058075278363
LS PFM -600/830/5	LED Strip Profiles Medium, -PM03/E/19X19/10/1	▶ 4058075278394
LS PFM -600/830/5	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS PFM -600/830/5	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS PFM -600/830/5	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS PFM -600/830/5	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS PFM -600/830/5	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS PFM -600/830/5	LED Strip Profiles Flat, -PF01/UW/22X6/10/2	▶ 4058075401556
LS PFM -600/830/5	LED Strip Profiles Flat, -PF02/U/16X5/10/2	▶ 4058075401587
LS PFM -600/830/5	LED Strip Profiles Flat, -PF03/UW/25X7/12/2	▶ 4058075401617
LS PFM -600/830/5	LED Strip Profiles Flat, -PF04/U/17X7/12/2	▶ 4058075401648
LS PFM -600/830/5	LED Strip Profiles Medium, -PM01/UW/21,5X12/10/2	▶ 4058075401679
LS PFM -600/830/5	LED Strip Profiles Medium, -PM02/R/18X15,5/10/2	▶ 4058075401709
LS PFM -600/830/5	LED Strip Profiles Medium, -PM03/E/19X19/10/2	▶ 4058075401730
LS PFM -600/830/5	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/2	▶ 4058075401761
LS PFM -600/830/5	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/2	▶ 4058075401792
LS PFM -600/830/5	LED Strip Profiles Medium, -PM06/E/18X18/12/2	▶ 4058075401822
LS PFM -600/840/5	LED Strip Performance Connectors, -CP/P2/500	▶ 4058075272217
LS PFM -600/840/5	LED Strip Performance Connectors, -CSD/P2	▶ 4058075275409
LS PFM -600/840/5	LED Strip Performance Connectors, -CSW/P2/50	▶ 4058075272248
LS PFM -600/840/5	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS PFM -600/840/5	LED Strip Performance Connectors, -8/SMB	▶ 4058075275652
LS PFM -600/840/5	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS PFM -600/840/5	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS PFM -600/840/5	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS PFM -600/840/5	LED Strip Profiles Flat, -PF01/UW/22X6/10/1	▶ 4058075278219
LS PFM -600/840/5	LED Strip Profiles Flat, -PF02/U/16X5/10/1	▶ 4058075278240
LS PFM -600/840/5	LED Strip Profiles Flat, -PF03/UW/25X7/12/1	▶ 4058075278271
LS PFM -600/840/5	LED Strip Profiles Flat, -PF04/U/17X7/12/1	▶ 4058075278301
LS PFM -600/840/5	LED Strip Profiles Medium, -PM01/UW/21,5X12/10/1	▶ 4058075278332
LS PFM -600/840/5	LED Strip Profiles Medium, -PM02/R/18X15,5/10/1	▶ 4058075278363
LS PFM -600/840/5	LED Strip Profiles Medium, -PM03/E/19X19/10/1	▶ 4058075278394
LS PFM -600/840/5	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS PFM -600/840/5	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292

LS PFM -600/840/5	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS PFM -600/840/5	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS PFM -600/840/5	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS PFM -600/840/5	LED Strip Profiles Flat, -PF01/UW/22X6/10/2	▶ 4058075401556
LS PFM -600/840/5	LED Strip Profiles Flat, -PF02/U/16X5/10/2	▶ 4058075401587
LS PFM -600/840/5	LED Strip Profiles Flat, -PF03/UW/25X7/12/2	▶ 4058075401617
LS PFM -600/840/5	LED Strip Profiles Flat, -PF04/U/17X7/12/2	▶ 4058075401648
LS PFM -600/840/5	LED Strip Profiles Medium, -PM01/UW/21,5X12/10/2	▶ 4058075401679
LS PFM -600/840/5	LED Strip Profiles Medium, -PM02/R/18X15,5/10/2	▶ 4058075401709
LS PFM -600/840/5	LED Strip Profiles Medium, -PM03/E/19X19/10/2	▶ 4058075401730
LS PFM -600/840/5	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/2	▶ 4058075401761
LS PFM -600/840/5	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/2	▶ 4058075401792
LS PFM -600/840/5	LED Strip Profiles Medium, -PM06/E/18X18/12/2	▶ 4058075401822
LS PFM -600/865/5	LED Strip Performance Connectors, -CP/P2/500	▶ 4058075272217
LS PFM -600/865/5	LED Strip Performance Connectors, -CSD/P2	▶ 4058075275409
LS PFM -600/865/5	LED Strip Performance Connectors, -CSW/P2/50	▶ 4058075272248
LS PFM -600/865/5	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS PFM -600/865/5	LED Strip Performance Connectors, -8/SMB	▶ 4058075275652
LS PFM -600/865/5	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS PFM -600/865/5	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS PFM -600/865/5	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS PFM -600/865/5	LED Strip Profiles Flat, -PF01/UW/22X6/10/1	▶ 4058075278219
LS PFM -600/865/5	LED Strip Profiles Flat, -PF02/U/16X5/10/1	▶ 4058075278240
LS PFM -600/865/5	LED Strip Profiles Flat, -PF03/UW/25X7/12/1	▶ 4058075278271
LS PFM -600/865/5	LED Strip Profiles Flat, -PF04/U/17X7/12/1	▶ 4058075278301
LS PFM -600/865/5	LED Strip Profiles Medium, -PM01/UW/21,5X12/10/1	▶ 4058075278332
LS PFM -600/865/5	LED Strip Profiles Medium, -PM02/R/18X15,5/10/1	▶ 4058075278363
LS PFM -600/865/5	LED Strip Profiles Medium, -PM03/E/19X19/10/1	▶ 4058075278394
LS PFM -600/865/5	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS PFM -600/865/5	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS PFM -600/865/5	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS PFM -600/865/5	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS PFM -600/865/5	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS PFM -600/865/5	LED Strip Profiles Flat, -PF01/UW/22X6/10/2	▶ 4058075401556
LS PFM -600/865/5	LED Strip Profiles Flat, -PF02/U/16X5/10/2	▶ 4058075401587
LS PFM -600/865/5	LED Strip Profiles Flat, -PF03/UW/25X7/12/2	▶ 4058075401617
LS PFM -600/865/5	LED Strip Profiles Flat, -PF04/U/17X7/12/2	▶ 4058075401648
LS PFM -600/865/5	LED Strip Profiles Medium, -PM01/UW/21,5X12/10/2	▶ 4058075401679
LS PFM -600/865/5	LED Strip Profiles Medium, -PM02/R/18X15,5/10/2	▶ 4058075401709

LS PFM -600/865/5	LED Strip Profiles Medium, -PM03/E/19X19/10/2	▶	4058075401730
LS PFM -600/865/5	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/2	▶	4058075401761
LS PFM -600/865/5	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/2	▶	4058075401792
LS PFM -600/865/5	LED Strip Profiles Medium, -PM06/E/18X18/12/2	▶	4058075401822

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.