

PRODUCT FAMILY DATASHEET

LED STRIP PERFORMANCE-300 PROTECTED

High performance IP66 protected LED strips with 300 lm/m for high requirements



AREAS OF APPLICATION

- General indoor illumination
- General outdoor illumination
- Industry
- Offices, retail outlets and conference rooms
- Architecture lighting
- Decorative illumination

PRODUCT BENEFITS

- Great scope of design options due to long and flexible LED strips
- Easy installation, no tools required for connection
- Easy mounting on many smooth surfaces thanks to self-adhesive tape
- Suitable for use in damp conditions thanks to high type of protection
- Maximum flexibility due to large range of accessories
- Simple connection thanks to integrated cables on both sides

PRODUCT FEATURES

- Flexible and cuttable LED strip
- Smallest cuttable unit: 100 mm
- Lifetime (L70/B50): up to 35,000 h at Tc max.: 75°C
- Luminous flux: 300 lm/m
- Color rendering index R_a : > 80
- Initial color consistency: ≤ 4 SDCM



- Large range of color temperatures: from warm white to cool daylight
- Type of protection: IP66
- Dimmable with suitable drivers, see also www.ledvance.com/dim
- UV resistance (acc. IEC 60068-2-5)
- Salt mist resistance (acc. IEC 60068-2-52)

TECHNICAL DATA

Electrical data

Product description	Rated wattage	Nominal wattage	Nominal wattage per meter	Nominal voltage	Input voltage range	Reverse Voltage
LS PFM -300/827/5/IP66	13.50 W	13.50 W	2.7 W	24 V ¹⁾	23...25 V ¹⁾	25 V ¹⁾
LS PFM -300/830/5/IP66	13.50 W	13.50 W	2.7 W	24 V ¹⁾	23...25 V ¹⁾	25 V ¹⁾
LS PFM -300/840/5/IP66	13.50 W	13.50 W	2.7 W	24 V ¹⁾	23...25 V ¹⁾	25 V ¹⁾
LS PFM -300/865/5/IP66	13.50 W	13.50 W	2.7 W	24 V ¹⁾	23...25 V ¹⁾	25 V ¹⁾

¹⁾V_{DC}

Photometrical data

Product description	Color temperature	Standard deviation of color matching	Color rendering index Ra	Light color LED	Luminous flux per meter	Luminous flux	Luminous efficacy
LS PFM -300/827/5/IP66	2700 K	≤4 sdc	>80	Warm white	300 lm	1500 lm	111.1 lm/W
LS PFM -300/830/5/IP66	3000 K	≤4 sdc	>80	White	300 lm	1500 lm	111.1 lm/W
LS PFM -300/840/5/IP66	4000 K	≤4 sdc	>80	Cool white	330 lm	1650 lm	122.2 lm/W
LS PFM -300/865/5/IP66	6500 K	≤4 sdc	>80	Daylight	330 lm	1650 lm	122.2 lm/W

Light technical data

Product description	Beam angle
LS PFM -300/827/5/IP66	105 °
LS PFM -300/830/5/IP66	105 °
LS PFM -300/840/5/IP66	105 °
LS PFM -300/865/5/IP66	105 °

LED module information


Product description	Number of LEDs per meter	Number of LEDs per module	Number of LEDs per smallest unit
LS PFM -300/827/5/IP66	70	350	7
LS PFM -300/830/5/IP66	70	350	7
LS PFM -300/840/5/IP66	70	350	7
LS PFM -300/865/5/IP66	70	350	7

Dimensions & weight

Product description	LED pitch	Length	Width	Height	Cable length
LS PFM -300/827/5/IP66	14.3 mm	5000 mm	10.0 mm	4.50 mm	500 mm
LS PFM -300/830/5/IP66	14.3 mm	5000 mm	10.0 mm	4.50 mm	500 mm
LS PFM -300/840/5/IP66	14.3 mm	5000 mm	10.0 mm	4.50 mm	500 mm
LS PFM -300/865/5/IP66	14.3 mm	5000 mm	10.0 mm	4.50 mm	500 mm

Product description	Product weight	Short pitch	Prewired	Conductor cross section
LS PFM -300/827/5/IP66	285.00 g	No	Yes	0.5 mm ²
LS PFM -300/830/5/IP66	285.00 g	No	Yes	0.5 mm ²
LS PFM -300/840/5/IP66	285.00 g	No	Yes	0.5 mm ²
LS PFM -300/865/5/IP66	285.00 g	No	Yes	0.5 mm ²

Product line drawing

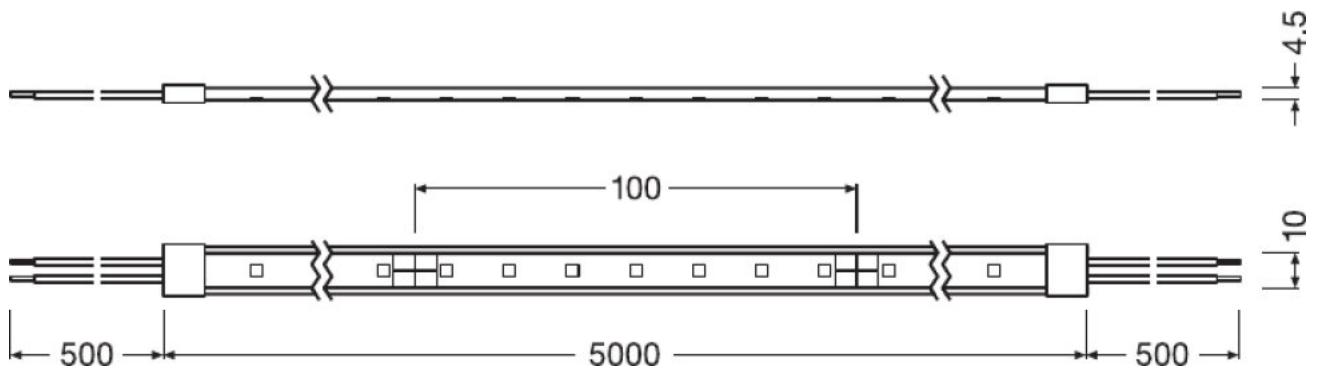

LS PFM -300/827/5/IP66, LS PFM -300/830/5/IP66, LS PFM -300/840/5/IP66, LS PFM -300/865/5/IP66

Colors & materials

Product description	Cover material
LS PFM -300/827/5/IP66	Silicone
LS PFM -300/830/5/IP66	Silicone
LS PFM -300/840/5/IP66	Silicone
LS PFM -300/865/5/IP66	Silicone

Temperatures & operating conditions

Product description	Ambient temperature range	Temperature range in operation	Maximum temperature at tc test point
LS PFM -300/827/5/IP66	-15...+45 °C ¹⁾	-15...+75 °C ²⁾	75 °C ³⁾
LS PFM -300/830/5/IP66	-15...+45 °C ¹⁾	-15...+75 °C ²⁾	75 °C ³⁾
LS PFM -300/840/5/IP66	-15...+45 °C ¹⁾	-15...+75 °C ²⁾	75 °C ³⁾
LS PFM -300/865/5/IP66	-15...+45 °C ¹⁾	-15...+75 °C ²⁾	75 °C ³⁾

- ¹⁾ Providing that temperature at Tc point is below max value during operation
- ²⁾ At the T_c point
- ³⁾ Exceeding the maximum specified ratings can reduce expected life time or destroy the LED strip

Lifespan

Product description	Lifespan
LS PFM -300/827/5/IP66	35000 h ¹⁾
LS PFM -300/830/5/IP66	35000 h ¹⁾
LS PFM -300/840/5/IP66	35000 h ¹⁾
LS PFM -300/865/5/IP66	35000 h ¹⁾

- ¹⁾ L70/B50 at Tc max. 75 °C

Capabilities

Product description	Lowest bending radius	Self-adhesive	Dimmable	Reverse polarity protection
LS PFM -300/827/5/IP66	25 mm	Yes	Yes ¹⁾	Yes ²⁾
LS PFM -300/830/5/IP66	25 mm	Yes	Yes ¹⁾	Yes ²⁾
LS PFM -300/840/5/IP66	25 mm	Yes	Yes ¹⁾	Yes ²⁾
LS PFM -300/865/5/IP66	25 mm	Yes	Yes ¹⁾	Yes ²⁾

- ¹⁾ Dimmable with suitable drivers, see also www.ledvance.com/dim
- ²⁾ Up to maximum 25 V_{DC}

Certificates & standards

Product description	Salt mist resistance acc. IEC 60068-2-52	UV resistance acc. IEC 60068-2-5	Energy consumption	Energy efficiency class	Type of protection
LS PFM -300/827/5/IP66	Yes	Yes	15 kWh/1000h	A+ ¹⁾	IP66
LS PFM -300/830/5/IP66	Yes	Yes	15 kWh/1000h	A+ ¹⁾	IP66
LS PFM -300/840/5/IP66	Yes	Yes	15 kWh/1000h	A+ ¹⁾	IP66
LS PFM -300/865/5/IP66	Yes	Yes	15 kWh/1000h	A+ ¹⁾	IP66

Product description	Standards
LS PFM -300/827/5/IP66	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547

Product description	Standards
LS PFM -300/830/5/IP66	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
LS PFM -300/840/5/IP66	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
LS PFM -300/865/5/IP66	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547

¹⁾ Applicable on entire product

Logistical data

Product description	Temperature range at storage
LS PFM -300/827/5/IP66	-35...+85 °C
LS PFM -300/830/5/IP66	-35...+85 °C
LS PFM -300/840/5/IP66	-35...+85 °C
LS PFM -300/865/5/IP66	-35...+85 °C

EQUIPMENT / ACCESSORIES

- Connectors, profiles and covers for several mounting options available
- Endcaps have to be ordered separately

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

ADDITIONAL PRODUCT INFORMATION

- All the technical parameters apply to the entire LED module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.
- All LED strips have a self-adhesive tape on the reverse side. LED strips can be attached to suitable materials, e.g. aluminum profiles. The surface of the material must be free of grease, oil, silicone and dirt particles. The adhesive tape can be used only one time, if the LED strip will be removed from the mounting surface, there could be a damage of the LED strips and the mounting material. The surface temperature of the mounting material should be in the temperature range of 18°C...35°C. Complete adhesion takes up to 72 h.
- According IPC 6013C – Use A the LED strips are designed for static installation. Vibrations, respective torsion and elongation/compression must be considered.
- In a wide temperature range operation field (e.g. outdoor installation) and a LED strip length with more than 2m suitable mounting surface is required. To avoid stress due to mismatch in expansion of the different materials, there should be an extra thicker adhesive tape between LED strip and mounting surface. Additionally, the LED strip should have enough space for thermal expansion at higher temperatures.
- Compensation due to chemical corrosion is excluded. A suitable protection against corrosive agents such as moisture, condensation etc. must be provided. Hydrogen sulfide (H₂S) will cause an accelerated corrosion which leads to shortened lifetime or premature failure.
- IP00 LED strips have not surface coating. Consequently, they have no protection against contact and corrosion.

- Installation of the LED strip has to be done by a qualified electrician.
- Handle with care to avoid mechanical product damage
- If the maximum operating and storage temperature ratings will be exceeded, the expected lifetime will be reduced or even the LED strip will be destroyed. It is not allowed to operate the LED strip over the specified Tc temperature (acc. EN 60598-1 under steady state conditions)
- It is not allowed to exceed the maximum operation voltage. This could cause a hazardous overload and will destroy the LED strip.
- The applicable electrical and safety standards have to be maintained for a LED strip installations
- Pay attention on correct polarity. Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Galvanic Insulation between LED strip and mounting surface must be ensured. This Insulation is needed especially in the area of connections or cut ends.
- In installations of LED strips ESD safety must be taken in account. Adequate precautions during installation and operation for the products are required.
- LED strip can be operated only by a SELV LED driver, which comply with the applicable lighting standards and fits to LED strips rating. A safety operation of the LED strips require a SELV LED driver with an electronically stabilized power supply protection against short circuits, overload and overheating.
- To avoid a damage of the LED strip, the unmounted LED strip should be handled and stored only in the original LEDVANCE packaging (wheel / ESD bag). Repacking is not allowed. Cutted IP 6x LED strips can be stored only with mounted endcaps.



SALES AND TECHNICAL SUPPORT

Sales and Technical Support www.ledvance.com

COUNTRY SPECIFIC INFORMATION

Product description	Product code	METEL-Code	SEG-No.	STK number	UK Org
LS PFM - 300/827/5/IP66	4058075236622	-	-	4231980	-
LS PFM - 300/830/5/IP66	4058075236660	-	-	4231981	-
LS PFM - 300/840/5/IP66	4058075236806	-	-	4231982	-
LS PFM - 300/865/5/IP66	4058075236707	-	-	4231983	-

DOWNLOAD DATA

File
 User instruction LED STRIP PERFORMANCE IP66
 Declarations of conformity EU Declaration of conformity 3563397 LS PFM

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075236639	Shipping carton box 10	300 mm x 280 mm x 285 mm	5721.00 g	23.94 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075236677	Shipping carton box 10	300 mm x 280 mm x 285 mm	5721.00 g	23.94 dm ³
4058075236813	Shipping carton box 10	300 mm x 280 mm x 285 mm	5721.00 g	23.94 dm ³
4058075236714	Shipping carton box 10	300 mm x 280 mm x 285 mm	5721.00 g	23.94 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ACCESSORIES MANDATORY

Product description	Accessory name	Accessory code
LS PFM -300/827/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -20/220-240/24/P	▶ 4058075239968
LS PFM -300/827/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS PFM -300/827/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS PFM -300/827/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS PFM -300/827/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS PFM -300/827/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS PFM -300/827/5/IP66	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS PFM -300/827/5/IP66	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS PFM -300/827/5/IP66	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS PFM -300/827/5/IP66	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS PFM -300/827/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS PFM -300/827/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS PFM -300/827/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS PFM -300/827/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS PFM -300/827/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS PFM -300/830/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -20/220-240/24/P	▶ 4058075239968
LS PFM -300/830/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS PFM -300/830/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS PFM -300/830/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS PFM -300/830/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS PFM -300/830/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS PFM -300/830/5/IP66	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS PFM -300/830/5/IP66	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS PFM -300/830/5/IP66	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS PFM -300/830/5/IP66	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS PFM -300/830/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS PFM -300/830/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982

LS PFM -300/830/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS PFM -300/830/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS PFM -300/830/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS PFM -300/840/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -20/220-240/24/P	▶ 4058075239968
LS PFM -300/840/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS PFM -300/840/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS PFM -300/840/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS PFM -300/840/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS PFM -300/840/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS PFM -300/840/5/IP66	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS PFM -300/840/5/IP66	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS PFM -300/840/5/IP66	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS PFM -300/840/5/IP66	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS PFM -300/840/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS PFM -300/840/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS PFM -300/840/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS PFM -300/840/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS PFM -300/840/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS PFM -300/865/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -20/220-240/24/P	▶ 4058075239968
LS PFM -300/865/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS PFM -300/865/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS PFM -300/865/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS PFM -300/865/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS PFM -300/865/5/IP66	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS PFM -300/865/5/IP66	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS PFM -300/865/5/IP66	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS PFM -300/865/5/IP66	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS PFM -300/865/5/IP66	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS PFM -300/865/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS PFM -300/865/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS PFM -300/865/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS PFM -300/865/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS PFM -300/865/5/IP66	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920

ACCESSORIES OPTIONAL

Product description	Accessory name	Accessory code
LS PFM -300/827/5/IP66	LED Strip Performance Connectors, -CP/P2/500/P	▶ 4058075272965
LS PFM -300/827/5/IP66	LED Strip Performance Connectors, -CSD/P2/P	▶ 4058075275492

LS PFM -300/827/5/IP66	LED Strip Performance Connectors, -CSW/P2/50/P	▶ 4058075273252
LS PFM -300/827/5/IP66	LED Strip Performance Connectors, -10/SE/P SIL-SEAL	▶ 4058075275751
LS PFM -300/827/5/IP66	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS PFM -300/827/5/IP66	LED Strip Performance Connectors, -10/SMB	▶ 4058075275683
LS PFM -300/827/5/IP66	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS PFM -300/827/5/IP66	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS PFM -300/827/5/IP66	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS PFM -300/827/5/IP66	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS PFM -300/827/5/IP66	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS PFM -300/827/5/IP66	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS PFM -300/827/5/IP66	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS PFM -300/827/5/IP66	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS PFM -300/827/5/IP66	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/2	▶ 4058075401761
LS PFM -300/827/5/IP66	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/2	▶ 4058075401792
LS PFM -300/827/5/IP66	LED Strip Profiles Medium, -PM06/E/18X18/12/2	▶ 4058075401822
LS PFM -300/830/5/IP66	LED Strip Performance Connectors, -CP/P2/500/P	▶ 4058075272965
LS PFM -300/830/5/IP66	LED Strip Performance Connectors, -CSD/P2/P	▶ 4058075275492
LS PFM -300/830/5/IP66	LED Strip Performance Connectors, -CSW/P2/50/P	▶ 4058075273252
LS PFM -300/830/5/IP66	LED Strip Performance Connectors, -10/SE/P SIL-SEAL	▶ 4058075275751
LS PFM -300/830/5/IP66	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS PFM -300/830/5/IP66	LED Strip Performance Connectors, -10/SMB	▶ 4058075275683
LS PFM -300/830/5/IP66	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS PFM -300/830/5/IP66	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS PFM -300/830/5/IP66	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS PFM -300/830/5/IP66	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS PFM -300/830/5/IP66	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS PFM -300/830/5/IP66	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS PFM -300/830/5/IP66	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS PFM -300/830/5/IP66	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS PFM -300/830/5/IP66	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/2	▶ 4058075401761
LS PFM -300/830/5/IP66	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/2	▶ 4058075401792
LS PFM -300/830/5/IP66	LED Strip Profiles Medium, -PM06/E/18X18/12/2	▶ 4058075401822
LS PFM -300/840/5/IP66	LED Strip Performance Connectors, -CP/P2/500/P	▶ 4058075272965
LS PFM -300/840/5/IP66	LED Strip Performance Connectors, -CSD/P2/P	▶ 4058075275492
LS PFM -300/840/5/IP66	LED Strip Performance Connectors, -CSW/P2/50/P	▶ 4058075273252
LS PFM -300/840/5/IP66	LED Strip Performance Connectors, -10/SE/P SIL-SEAL	▶ 4058075275751
LS PFM -300/840/5/IP66	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS PFM -300/840/5/IP66	LED Strip Performance Connectors, -10/SMB	▶ 4058075275683
LS PFM -300/840/5/IP66	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127

LS PFM -300/840/5/IP66	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS PFM -300/840/5/IP66	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS PFM -300/840/5/IP66	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS PFM -300/840/5/IP66	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS PFM -300/840/5/IP66	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS PFM -300/840/5/IP66	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS PFM -300/840/5/IP66	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS PFM -300/840/5/IP66	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/2	▶ 4058075401761
LS PFM -300/840/5/IP66	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/2	▶ 4058075401792
LS PFM -300/840/5/IP66	LED Strip Profiles Medium, -PM06/E/18X18/12/2	▶ 4058075401822
LS PFM -300/865/5/IP66	LED Strip Performance Connectors, -CP/P2/500/P	▶ 4058075272965
LS PFM -300/865/5/IP66	LED Strip Performance Connectors, -CSD/P2/P	▶ 4058075275492
LS PFM -300/865/5/IP66	LED Strip Performance Connectors, -CSW/P2/50/P	▶ 4058075273252
LS PFM -300/865/5/IP66	LED Strip Performance Connectors, -10/SE/P SIL-SEAL	▶ 4058075275751
LS PFM -300/865/5/IP66	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS PFM -300/865/5/IP66	LED Strip Performance Connectors, -10/SMB	▶ 4058075275683
LS PFM -300/865/5/IP66	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS PFM -300/865/5/IP66	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS PFM -300/865/5/IP66	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS PFM -300/865/5/IP66	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS PFM -300/865/5/IP66	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS PFM -300/865/5/IP66	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS PFM -300/865/5/IP66	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS PFM -300/865/5/IP66	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS PFM -300/865/5/IP66	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/2	▶ 4058075401761
LS PFM -300/865/5/IP66	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/2	▶ 4058075401792
LS PFM -300/865/5/IP66	LED Strip Profiles Medium, -PM06/E/18X18/12/2	▶ 4058075401822

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.