

PRODUCT DATASHEET

ENDURA STYLE Mini Spot I 8 W DG

ENDURA STYLE MINI SPOT | Wall luminaires with rotatable head



AREAS OF APPLICATION

- Outdoor use (IP44)
- Building facades
- Entrance lighting
- Patios, balconies

PRODUCT BENEFITS

- Easy and quick installation
- Energy-efficient thanks to LED technology

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Die-cast aluminum housing
- Available in two housing colors
- Adjustable modules: rotation angle 340°



TECHNICAL DATA


Electrical data

| | |
|-----------------|---------------|
| Nominal wattage | 7.50 W |
| Operating mode | Mains voltage |
| Nominal voltage | 220...240 V |
| Mains frequency | 50/60 Hz |

Photometrical data

| | |
|---------------------------|------------|
| Color temperature | 3000 K |
| Color rendering index Ra | >80 |
| Light color (designation) | Warm White |
| Luminous flux | 320 lm |
| Luminous efficacy | 43 lm/W |

Dimensions & weight

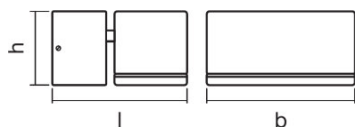

| | |
|----------------|----------|
| Length | 100.0 mm |
| Width | 110.0 mm |
| Height | 54.0 mm |
| Product weight | 390.00 g |

Colors & materials

| | |
|----------------|-------------------------------|
| Body material | Aluminum |
| Product color | Dark gray |
| Housing color | Dark gray |
| Cover material | Polymethylmethacrylate (PMMA) |

Temperatures & operating conditions

| | |
|---------------------------|--------------|
| Ambient temperature range | -20...+40 °C |
|---------------------------|--------------|

Lifespan

| | |
|-----------------------------------|-------|
| Number of switching cycles | 15000 |
|-----------------------------------|-------|

Additional product data

| | |
|--------------------------|---------|
| Mounting type | Surface |
| Mounting location | Wall |

Capabilities

| | |
|-------------------------------|-----------------|
| Dimmable | No |
| Type of connection | Screw terminal |
| LED module replaceable | Not replaceable |

Certificates & standards

| | |
|---------------------------|-------------------|
| Protection class | I |
| Type of protection | IP44 |
| Standards | CE/EAC/REACH/RoHS |

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4058075205130 | Folding carton box 1 | 70 mm x 142 mm x 123 mm | 416.00 g | 1.22 dm ³ |
| 4058075205147 | Shipping carton box 6 | 260 mm x 155 mm x 225 mm | 2631.00 g | 9.07 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.