

PRODUCT FAMILY DATASHEET

ENDURA STYLE MINI SPOT

Wall luminaires with rotatable head



AREAS OF APPLICATION

- Outdoor use (IP44)
- Building facades
- Entrance lighting
- Patios, balconies

PRODUCT BENEFITS

- Easy and quick installation
- Energy-efficient thanks to LED technology

PRODUCT FEATURES


- Bright and functional outdoor LED luminaires
- Die-cast aluminum housing
- Available in two housing colors
- Adjustable modules: rotation angle 340°



TECHNICAL DATA

| Product description | Electrical data | | | Photometrical data | | Dimensions & weight | | | | Colors & materials | |
|-----------------------------------|-----------------|-----------------|-----------------|--------------------|---------------|---------------------|----------|---------|----------------|--------------------|---------------|
| | Nominal wattage | Nominal voltage | Mains frequency | Color temperature | Luminous flux | Length | Width | Height | Product weight | Body material | Housing color |
| ENDURA STYLE Mini Spot I 8 W DG | 7.50 W | 220...240 V | 50/60 Hz | 3000 K | 320 lm | 100.0 mm | 110.0 mm | 54.0 mm | 390.00 g | Aluminum | Dark gray |
| ENDURA STYLE Mini Spot I 8 W WT | 7.50 W | 220...240 V | 50/60 Hz | 3000 K | 410 lm | 100.0 mm | 110.0 mm | 54.0 mm | 390.00 g | Aluminum | White |
| ENDURA STYLE Mini Spot II 13 W DG | 13.00 W | 220...240 V | 50/60 Hz | 3000 K | 630 lm | 100.0 mm | 230.0 mm | 54.0 mm | 750.00 g | Aluminum | Dark gray |
| ENDURA STYLE Mini Spot II 13 W WT | 13.00 W | 220...240 V | 50/60 Hz | 3000 K | 800 lm | 100.0 mm | 230.0 mm | 54.0 mm | 750.00 g | Aluminum | White |

| Product description | Product color | Cover material | Temperatures & operating conditions | Lifespan | Capabilities | | Certificates & standards | |
|-----------------------------------|---------------|-------------------------------|-------------------------------------|----------------------------|--------------|--------------------|--------------------------|--------------------|
| | | | Ambient temperature range | Number of switching cycles | Dimmable | Type of connection | Protection class | Type of protection |
| ENDURA STYLE Mini Spot I 8 W DG | Dark gray | Polymethylmethacrylate (PMMA) | -20...+40 °C | 15000 | No | Screw terminal | I | IP44 |
| ENDURA STYLE Mini Spot I 8 W WT | White | Polymethylmethacrylate (PMMA) | -20...+40 °C | 15000 | No | Screw terminal | I | IP44 |
| ENDURA STYLE Mini Spot II 13 W DG | Dark gray | Polymethylmethacrylate (PMMA) | -20...+40 °C | 15000 | No | Screw terminal | I | IP44 |
| ENDURA STYLE Mini Spot II 13 W WT | White | Polymethylmethacrylate (PMMA) | -20...+40 °C | 15000 | No | Screw terminal | I | IP44 |

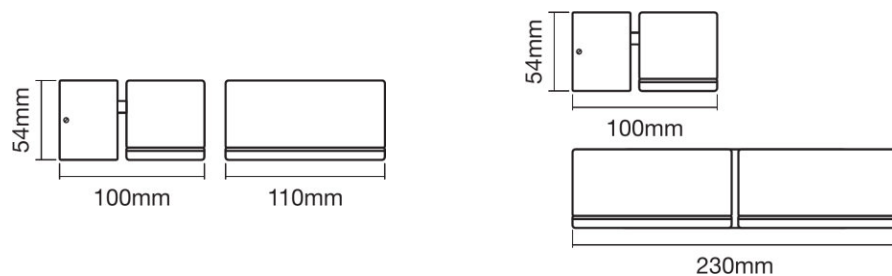

ENDURA STYLE Mini Spot I 8 W DG,
ENDURA STYLE Mini Spot I 8 W WT

ENDURA STYLE Mini Spot II 13 W DG,
ENDURA STYLE Mini Spot II 13 W WT

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4058075205147 | Shipping carton box 6 | 260 mm x 155 mm x 225 mm | 2631.00 g | 9.07 dm ³ |
| 4058075205161 | Shipping carton box 6 | 260 mm x 155 mm x 225 mm | 2631.00 g | 9.07 dm ³ |

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075205185 | Shipping carton box 6 | 320 mm x 310 mm x 365 mm | 5924.00 g | 36.21 dm ³ |
| 4058075205208 | Shipping carton box 6 | 320 mm x 310 mm x 365 mm | 5924.00 g | 36.21 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.