

PRODUCT DATASHEET

ENDURA STYLE Cylinder Wall 6 W ST

ENDURA STYLE CYLINDER | Stainless steel wall-luminaires and bollards with indirect illumination



AREAS OF APPLICATION

- Outdoor use (IP44)
- Building facades
- Gardens, balconies and other outdoor areas
- Pathway lighting
- Driveways

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- Easy and quick installation

PRODUCT FEATURES

- Bright and functional outdoor LED luminaires
- Housing made of Polycarbonate covered with stainless steel
- Available as wall, ceiling and bollard luminaires



TECHNICAL DATA


Electrical data

| | |
|-----------------|---------------|
| Nominal wattage | 6.00 W |
| Operating mode | Mains voltage |
| Nominal voltage | 220...240 V |
| Mains frequency | 50/60 Hz |

Photometrical data

| | |
|---------------------------|------------|
| Color temperature | 3000 K |
| Color rendering index Ra | >80 |
| Light color (designation) | Warm White |
| Luminous flux | 360 lm |
| Luminous efficacy | 60 lm/W |

Dimensions & weight

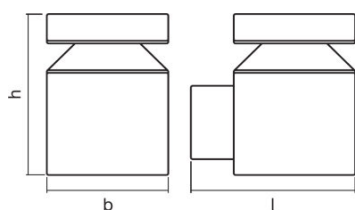

| | |
|----------------|----------|
| Length | 138.0 mm |
| Width | 102.0 mm |
| Height | 135.0 mm |
| Product weight | 470.00 g |

Colors & materials

| | |
|----------------|--------------------|
| Body material | Stainless steel |
| Product color | Steel |
| Housing color | Steel |
| Cover material | Polycarbonate (PC) |

Temperatures & operating conditions

| | |
|---------------------------|--------------|
| Ambient temperature range | -20...+40 °C |
|---------------------------|--------------|

Lifespan

| | |
|-----------------------------------|-------|
| Number of switching cycles | 15000 |
|-----------------------------------|-------|

Additional product data

| | |
|--------------------------|---------|
| Mounting type | Surface |
| Mounting location | Wall |

Capabilities

| | |
|-------------------------------|-----------------|
| Dimmable | No |
| Type of connection | Screw terminal |
| LED module replaceable | Not replaceable |

Certificates & standards

| | |
|---------------------------|-------------------|
| Protection class | II |
| Type of protection | IP44 |
| Standards | CE/EAC/REACH/RoHS |

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075205338 | Folding carton box 1 | 124 mm x 154 mm x 166 mm | 510.00 g | 3.17 dm ³ |
| 4058075205345 | Shipping carton box 6 | 380 mm x 175 mm x 320 mm | 3291.00 g | 21.28 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.