

PRODUCT FAMILY DATASHEET

ENDURA STYLE BALL

Wall and ceiling luminaire in hemi-sphere design



AREAS OF APPLICATION

- Outdoor use (IP44)
- Building facades
- Entrance lighting
- Patios, balconies

PRODUCT BENEFITS

- Easy and quick installation
- Energy-efficient thanks to LED technology

PRODUCT FEATURES


- Bright and functional outdoor LED luminaires
- Available with and without motion sensor
- Die-cast aluminum housing
- Available in two housing colors
- Available as wall and bollard luminaires




TECHNICAL DATA

Product description	Electrical data			Photometrical data		Light technical data	Dimensions & weight			Colors & materials	
	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Beam angle	Diameter	Height	Product weight	Body material	Product color
ENDURA STYLE Ball 12 W DG	12.00 W	220...240 V	50/60 Hz	3000 K	1030 lm	160 °	172.0 mm	122.0 mm	830.00 g	Aluminum	Dark gray
ENDURA STYLE Ball 12 W WT	12.00 W	220...240 V	50/60 Hz	3000 K	1030 lm	160 °	172.0 mm	122.0 mm	830.00 g	Aluminum	White
ENDURA STYLE Ball Sensor 12 W DG	12.00 W	220...240 V	50/60 Hz	3000 K	1030 lm	160 °	172.0 mm	122.0 mm	870.00 g	Aluminum	Dark gray
ENDURA STYLE Ball Sensor 12 W WT	12.00 W	220...240 V	50/60 Hz	3000 K	1030 lm	160 °	172.0 mm	122.0 mm	870.00 g	Aluminum	White

Product description	Housing color	Cover material	Temperatures & operating conditions	Lifespan	Capabilities		Certificates & standards	
			Ambient temperature range	Number of switching cycles	Dimmable	Type of connection	Protection class	Type of protection
ENDURA STYLE Ball 12 W DG	Dark gray	Polycarbonate (PC)	-20...+40 °C	15000	No	Screw terminal	I	IP44
ENDURA STYLE Ball 12 W WT	White	Polycarbonate (PC)	-20...+40 °C	15000	No	Screw terminal	I	IP44
ENDURA STYLE Ball Sensor 12 W DG	Dark gray	Polycarbonate (PC)	-20...+40 °C	15000	No	Screw terminal	I	IP44
ENDURA STYLE Ball Sensor 12 W WT	White	Polycarbonate (PC)	-20...+40 °C	15000	No	Screw terminal	I	IP44

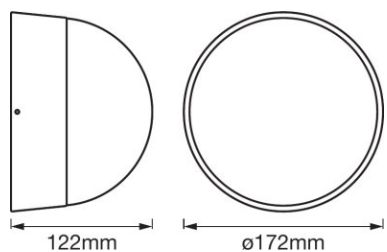

ENDURA STYLE Ball 12 W DG, ENDURA
STYLE Ball Sensor 12 W DG

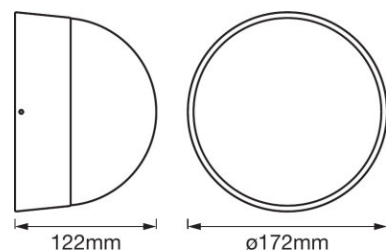

ENDURA STYLE Ball 12 W WT, ENDURA
STYLE Ball Sensor 12 W WT

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075205710	Shipping carton box 4	549 mm x 214 mm x 250 mm	3930.00 g	29.37 dm ³
4058075205734	Shipping carton box 4	549 mm x 214 mm x 250 mm	3930.00 g	29.37 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075205758	Shipping carton box 4	549 mm x 214 mm x 250 mm	4090.00 g	29.37 dm ³
4058075205772	Shipping carton box 4	549 mm x 214 mm x 250 mm	4090.00 g	29.37 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.