

PRODUCT FAMILY DATASHEET

ENDURA CLASSIC WALL

Wall luminaire with direct light



AREAS OF APPLICATION

- Outdoor use (IP44)
- Building facades
- Entrance lighting
- Patios, balconies

PRODUCT BENEFITS

- High flexibility in the choice of the light source thanks to E27 base
- Suitable for smart applications thanks to compatibility with Smart + lamps from LEDVANCE
- Easy and quick installation

PRODUCT FEATURES


- Die-cast aluminum housing
- Diffuser made of semi-transparent polycarbonate



TECHNICAL DATA

Product description	Electrical data		Dimensions & weight				Colors & materials				Temperatures & operating conditions
	Nominal voltage	Mains frequency	Length	Width	Height	Product weight	Body material	Housing color	Product color	Cover material	Ambient temperature range
ENDURA CLASSIC Wall E27 BK	220...240 V	50/60 Hz	126.0 mm	156.0 mm	220.0 mm	1220.00 g	Aluminum	Black	Black	Polycarbonate (PC)	-20...+40 °C

Product description	Additional product data	Capabilities			Certificates & standards	
	Equipped with lamp	Dimmable	Type of connection	Holder designation	Protection class	Type of protection
ENDURA CLASSIC Wall E27 BK	No	No	Screw terminal	E27	I	IP44

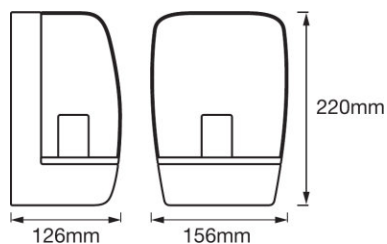

ENDURA CLASSIC Wall E27 BK

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included
- No light sources included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075206137	Shipping carton box 4	549 mm x 214 mm x 250 mm	5490.00 g	29.37 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.