

PRODUCT FAMILY DATASHEET

ENDURA STYLE WALL

Slim LED luminaires with high light output and optional sensor



AREAS OF APPLICATION

- Outdoor use (IP44)
- Entrance lighting
- Building facades

PRODUCT BENEFITS

- Energy-efficient thanks to LED technology
- Easy and quick installation

PRODUCT FEATURES

- Very bright and functional outdoor LED luminaires
- Die-cast aluminum housing
- Available in two housing colors
- Available with and without motion sensor




TECHNICAL DATA

Product description	Electrical data			Photometrical data		Light technical data	Dimensions & weight				Colors & materials
	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Beam angle	Length	Width	Height	Product weight	Body material
ENDURA STYLE Wall 12 W DG	11.50 W	220...240 V	50/60 Hz	3000 K	740 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm	1300.00 g	Aluminum
ENDURA STYLE Wall 12 W WT	11.50 W	220...240 V	50/60 Hz	3000 K	770 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm	1300.00 g	Aluminum
ENDURA STYLE Wall Sensor 12 W DG	12.20 W	220...240 V	50/60 Hz	3000 K	740 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm	1300.00 g	Aluminum
ENDURA STYLE Wall Sensor 12 W WT	12.20 W	220...240 V	50/60 Hz	3000 K	770 lm	107.00 °	168.0 mm	100.0 mm	273.0 mm	1300.00 g	Aluminum

Product description	Housing color	Product color	Cover material	Temperatures & operating conditions	Lifespan		Capabilities		Certificates & standards
				Ambient temperature range	Number of switching cycles	Lifespan	Dimmable	Type of connection	Protection class
ENDURA STYLE Wall 12 W DG	Dark gray	Dark gray	Glass	-20...+40 °C	15000	30000 h	No	Screw terminal	I
ENDURA STYLE Wall 12 W WT	White	White	Glass	-20...+40 °C	15000	30000 h	No	Screw terminal	I
ENDURA STYLE Wall Sensor 12 W DG	Dark gray	Dark gray	Glass	-20...+40 °C	15000		No	Screw terminal	I
ENDURA STYLE Wall Sensor 12 W WT	White	White	Glass	-20...+40 °C	15000		No	Screw terminal	I

Product description	Type of protection
ENDURA STYLE Wall 12 W DG	IP44
ENDURA STYLE Wall 12 W WT	IP44
ENDURA STYLE Wall Sensor 12 W DG	IP44
ENDURA STYLE Wall Sensor 12 W WT	IP44

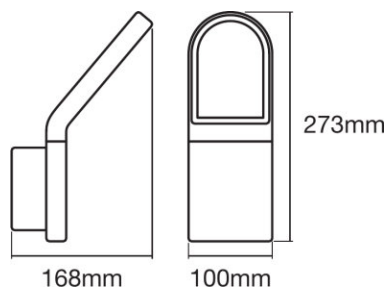

ENDURA STYLE Wall 12 W DG, ENDURA
 STYLE Wall 12 W WT, ENDURA STYLE
 Wall Sensor 12 W DG, ENDURA STYLE
 Wall Sensor 12 W WT

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075214149	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075214163	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm ³
4058075214187	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm ³
4058075214200	Shipping carton box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.