

PRODUCT DATASHEET

ENDURA STYLE UpDown Deco I 6 W DG

ENDURA STYLE UPDOWN DECO | Wall luminaire with narrow beam angle



AREAS OF APPLICATION

- Outdoor use (IP44)
- Building facades
- Entrance lighting
- Patios, balconies

PRODUCT BENEFITS

- Easy and quick installation
- Energy-efficient thanks to LED technology

PRODUCT FEATURES

- Narrow, clear-cut beam angle
- Die-cast aluminum housing
- Single or double light outlet



TECHNICAL DATA

Electrical data

Nominal wattage	6.00 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Mains frequency	50/60 Hz


Photometrical data

Color temperature	3000 K
Color rendering index Ra	≥80
Light color (designation)	Warm White
Luminous flux	280 lm
Luminous efficacy	47 lm/W

Light technical data

Beam angle	55.00 °
------------	---------

Dimensions & weight

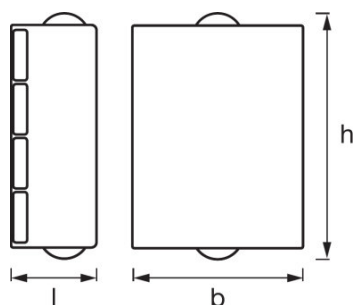

Length	50.0 mm
Width	100.0 mm
Height	130.0 mm
Product weight	550.00 g

Colors & materials

Body material	Aluminum
Product color	Dark gray
Housing color	Dark gray
Cover material	Polymethylmethacrylate (PMMA)

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
---------------------------	--------------

Lifespan

Number of switching cycles	100000
----------------------------	--------

Additional product data

Mounting type	Surface
Mounting location	Wall

Capabilities

Dimmable	No
Type of connection	Screw terminal
LED module replaceable	Not replaceable

Certificates & standards

Protection class	I
Type of protection	IP44
Standards	CE/EAC/REACH/RoHS

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075205529	Folding carton box 1	64 mm x 114 mm x 145 mm	574.00 g	1.06 dm ³
4058075205536	Shipping carton box 6	252 mm x 217 mm x 182 mm	3559.00 g	9.95 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.