

# PRODUCT DATASHEET

## LED WORKLIGHT TRIPOD 2X20 W 4000 K

WORKLIGHTS - TRIPOD | Versatile LED worklight with tripod stand



---

### AREAS OF APPLICATION

- Renovation
- Garages
- Basement
- Workshops

---

### PRODUCT BENEFITS

- Foldable for easy storage
- Energy savings of up to 80% compared to halogen lamp worklights
- Semi-frosted, tempered glass cover for uniform illumination

---

### PRODUCT FEATURES

- Available with 1 or 2 luminaire heads
- Rotation angle luminaire head: 360°, swiveling: 180°
- Type of protection, luminaire head and housing: IP65, Type of protection, plug: IP44
- Height adjustment of tripod up to 1.8 m total height
- Quick-release fastener for adjustment of luminaire head angle
- Type E/F plug



**TECHNICAL DATA**

Electrical data

Nominal wattage	40.00 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Mains frequency	50/60 Hz


Photometrical data

Color temperature	4000 K
Color rendering index Ra	≥80
Light color (designation)	Cool White
Luminous flux	3400 lm
Luminous efficacy	85 lm/W

Light technical data

Beam angle	120 °
------------	-------

Dimensions & weight

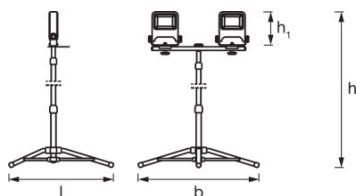

Length	780.0 mm
Width	680.0 mm
Height	1700 mm
Product weight	3400.00 g

Colors & materials

Body material	Aluminum/Steel
Product color	Dark gray
Housing color	Dark gray
Cover material	Glass
Light emitting surface material	Glass

## Temperatures &amp; operating conditions

<b>Ambient temperature range</b>	-20...+45 °C
----------------------------------	--------------

## Lifespan

<b>Number of switching cycles</b>	100000
-----------------------------------	--------

## Additional product data

<b>Mounting type</b>	Standing
<b>Mounting location</b>	Floor

## Capabilities

<b>Dimmable</b>	No
<b>Adjustable</b>	Yes
<b>Type of connection</b>	Protective contact Plug (type E/F)
<b>LED module replaceable</b>	Not replaceable

## Certificates &amp; standards

<b>Protection class</b>	I
<b>Type of protection</b>	IP65 <sup>1)</sup>
<b>Standards</b>	CE/EAC/REACH/ROHS

<sup>1)</sup> Luminaire head and housing IP65, plug IP44

## EQUIPMENT / ACCESSORIES

– Complete mounting and connecting accessories included

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075213913	Folding carton box 1	148 mm x 173 mm x 644 mm	3491.00 g	16.49 dm <sup>3</sup>
4058075213920	Shipping carton box 4	360 mm x 310 mm x 665 mm	14728.00 g	74.21 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.