

PRODUCT DATASHEET

LED WORKLIGHT TRIPOD 2X50 W 4000 K

WORKLIGHTS - TRIPOD | Versatile LED worklight with tripod stand



AREAS OF APPLICATION

- Renovation
- Garages
- Basement
- Workshops

PRODUCT BENEFITS

- Foldable for easy storage
- Energy savings of up to 80% compared to halogen lamp worklights
- Semi-frosted, tempered glass cover for uniform illumination

PRODUCT FEATURES

- Available with 1 or 2 luminaire heads
- Rotation angle luminaire head: 360°, swiveling: 180°
- Type of protection, luminaire head and housing: IP65, Type of protection, plug: IP44
- Height adjustment of tripod up to 1.8 m total height
- Quick-release fastener for adjustment of luminaire head angle
- Type E/F plug



TECHNICAL DATA

Electrical data

| | |
|-----------------|-------------------------------|
| Nominal wattage | 100.00 W |
| Operating mode | Electronic control gear (ECG) |
| Nominal voltage | 220...240 V |
| Mains frequency | 50/60 Hz |


Photometrical data

| | |
|---------------------------|------------|
| Color temperature | 4000 K |
| Color rendering index Ra | ≥80 |
| Light color (designation) | Cool White |
| Luminous flux | 9000 lm |
| Luminous efficacy | 90 lm/W |

Light technical data

| | |
|------------|-------|
| Beam angle | 120 ° |
|------------|-------|

Dimensions & weight

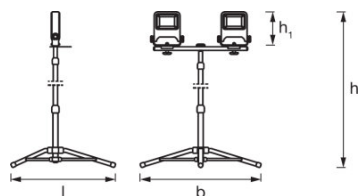

| | |
|----------------|-----------|
| Length | 780.0 mm |
| Width | 680.0 mm |
| Height | 1800 mm |
| Product weight | 4800.00 g |

Colors & materials

| | |
|---------------------------------|----------------|
| Body material | Aluminum/Steel |
| Product color | Dark gray |
| Housing color | Dark gray |
| Cover material | Glass |
| Light emitting surface material | Glass |

Temperatures & operating conditions

| | |
|---------------------------|--------------|
| Ambient temperature range | -20...+45 °C |
|---------------------------|--------------|

Lifespan

| | |
|----------------------------|--------|
| Number of switching cycles | 100000 |
|----------------------------|--------|

Additional product data

| | |
|-------------------|----------|
| Mounting type | Standing |
| Mounting location | Floor |

Capabilities

| | |
|------------------------|------------------------------------|
| Dimmable | No |
| Adjustable | Yes |
| Type of connection | Protective contact Plug (type E/F) |
| LED module replaceable | Not replaceable |

Certificates & standards

| | |
|--------------------|--------------------|
| Protection class | I |
| Type of protection | IP65 ¹⁾ |
| Standards | CE/EAC/REACH/ROHS |

¹⁾ Luminaire head and housing IP65, plug IP44

EQUIPMENT / ACCESSORIES

– Complete mounting and connecting accessories included

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|------------------------|
| 4058075213999 | Folding carton box 1 | 182 mm x 229 mm x 644 mm | 5059.00 g | 26.84 dm ³ |
| 4058075214002 | Shipping carton box 4 | 475 mm x 380 mm x 665 mm | 21266.00 g | 120.03 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.