

# PRODUCT FAMILY DATASHEET

## WORKLIGHTS - TRIPOD

Versatile LED worklight with tripod stand



---

### AREAS OF APPLICATION

- Renovation
- Garages
- Basement
- Workshops

---

### PRODUCT BENEFITS

- Foldable for easy storage
- Energy savings of up to 80% compared to halogen lamp worklights
- Semi-frosted, tempered glass cover for uniform illumination

---

### PRODUCT FEATURES

- Available with 1 or 2 luminaire heads
- Rotation angle luminaire head: 360°, swiveling: 180°
- Type of protection, luminaire head and housing: IP65, Type of protection, plug: IP44
- Height adjustment of tripod up to 1.8 m total height
- Quick-release fastener for adjustment of luminaire head angle
- Type E/F plug



TECHNICAL DATA


Product description	Electrical data			Photometrical data		Light technical data	Dimensions & weight				Colors & materials
	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Beam angle	Length	Width	Height	Product weight	Body material
LED WORKLIGHT TRIPOD 1X20 W 4000 K	20.00 W	220...240 V	50/60 Hz	4000 K	1700 lm	120 °	780.0 mm	680.0 mm	1700 mm	2600.00 g	Aluminum/Steel
LED WORKLIGHT TRIPOD 1X30 W 4000 K	30.00 W	220...240 V	50/60 Hz	4000 K	2700 lm	120 °	780.0 mm	680.0 mm	1750 mm	2850.00 g	Aluminum/Steel
LED WORKLIGHT TRIPOD 1X50 W 4000 K	50.00 W	220...240 V	50/60 Hz	4000 K	4500 lm	120 °	780.0 mm	680.0 mm	1800 mm	3280.00 g	Aluminum/Steel
LED WORKLIGHT TRIPOD 2X30 W 4000 K	60.00 W	220...240 V	50/60 Hz	4000 K	5400 lm	120 °	780.0 mm	680.0 mm	1750 mm	3920.00 g	Aluminum/Steel
LED WORKLIGHT TRIPOD 2X20 W 4000 K	40.00 W	220...240 V	50/60 Hz	4000 K	3400 lm	120 °	780.0 mm	680.0 mm	1700 mm	3400.00 g	Aluminum/Steel
LED WORKLIGHT TRIPOD 2X50 W 4000 K	100.00 W	220...240 V	50/60 Hz	4000 K	9000 lm	120 °	780.0 mm	680.0 mm	1800 mm	4800.00 g	Aluminum/Steel

Product description	Housing color	Product color	Cover material	Light emitting surface material	Temperatures & operating conditions	Lifespan	Capabilities	
					Ambient temperature range	Number of switching cycles	Dimmable	Adjustable
LED WORKLIGHT TRIPOD 1X20 W 4000 K	Dark gray	Dark gray	Glass	Glass	-20...+45 °C	100000	No	Yes
LED WORKLIGHT TRIPOD 1X30 W 4000 K	Dark gray	Dark gray	Glass	Glass	-20...+45 °C	100000	No	Yes
LED WORKLIGHT TRIPOD 1X50 W 4000 K	Dark gray	Dark gray	Glass	Glass	-20...+45 °C	100000	No	Yes
LED WORKLIGHT TRIPOD 2X30 W 4000 K	Dark gray	Dark gray	Glass	Glass	-20...+45 °C	100000	No	Yes
LED WORKLIGHT TRIPOD 2X20 W 4000 K	Dark gray	Dark gray	Glass	Glass	-20...+45 °C	100000	No	Yes
LED WORKLIGHT TRIPOD 2X50 W 4000 K	Dark gray	Dark gray	Glass	Glass	-20...+45 °C	100000	No	Yes


Certificates & standards

Product description	Type of connection	Protection class	Type of protection
LED WORKLIGHT TRIPOD 1X20 W 4000 K	Protective contact Plug (type E/F)	I	IP65 <sup>1)</sup>
LED WORKLIGHT TRIPOD 1X30 W 4000 K	Protective contact Plug (type E/F)	I	IP65 <sup>1)</sup>
LED WORKLIGHT TRIPOD 1X50 W 4000 K	Protective contact Plug (type E/F)	I	IP65 <sup>1)</sup>
LED WORKLIGHT TRIPOD 2X30 W 4000 K	Protective contact Plug (type E/F)	I	IP65 <sup>1)</sup>
LED WORKLIGHT TRIPOD 2X20 W 4000 K	Protective contact Plug (type E/F)	I	IP65 <sup>1)</sup>
LED WORKLIGHT TRIPOD 2X50 W 4000 K	Protective contact Plug (type E/F)	I	IP65 <sup>1)</sup>


<sup>1)</sup> Luminaire head and housing IP65, plug IP44

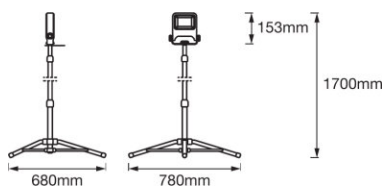


LED WORKLIGHT TRIPOD 1X20 W 4000 K

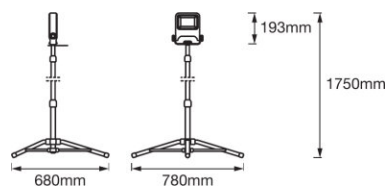



LED WORKLIGHT TRIPOD 1X30 W 4000 K

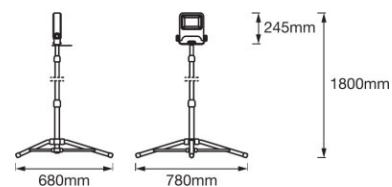

LED WORKLIGHT TRIPOD 1X50 W 4000 K

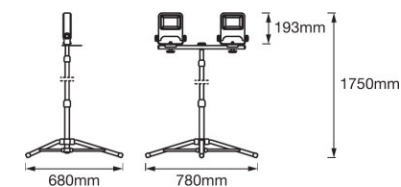

LED WORKLIGHT TRIPOD 2X30 W 4000 K

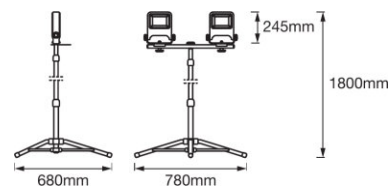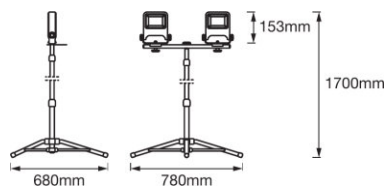

LED WORKLIGHT TRIPOD 2X20 W 4000  
K

LED WORKLIGHT TRIPOD 2X50 W 4000  
K

### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075213906	Shipping carton box 4	360 mm x 310 mm x 665 mm	11528.00 g	74.21 dm <sup>3</sup>
4058075213944	Shipping carton box 4	395 mm x 395 mm x 665 mm	13319.00 g	103.76 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075213982	Shipping carton box 4	475 mm x 380 mm x 665 mm	15186.00 g	120.03 dm <sup>3</sup>
4058075213968	Shipping carton box 4	395 mm x 395 mm x 665 mm	17599.00 g	103.76 dm <sup>3</sup>
4058075213920	Shipping carton box 4	360 mm x 310 mm x 665 mm	14728.00 g	74.21 dm <sup>3</sup>
4058075214002	Shipping carton box 4	475 mm x 380 mm x 665 mm	21266.00 g	120.03 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.