

PRODUCT DATASHEET

LED FLAT 20 W 2700 K

Slim design | Slim LED luminaires with LED module



AREAS OF APPLICATION

- Indoor applications
- Corridors, entrance areas, stairwells, living rooms, basements
- Kitchens, workspaces

PRODUCT BENEFITS

- Very slim design
- Energy savings of up to 80 % compared to luminaires using conventional lamps
- Easy and quick installation

PRODUCT FEATURES

- Ceiling luminaire with advanced LED technology
- Circular light emission



TECHNICAL DATA

Electrical data

| | |
|-----------------|-------------|
| Nominal wattage | 20.00 W |
| Nominal voltage | 220...240 V |
| Mains frequency | 50/60 Hz |


Photometrical data

| | |
|---------------------------|------------|
| Color temperature | 2700 K |
| Color rendering index Ra | 80 |
| Light color (designation) | Warm White |
| Luminous flux | 1200 lm |
| Luminous efficacy | 60 lm/W |

Light technical data

| | |
|------------|-------|
| Beam angle | 180 ° |
|------------|-------|

Dimensions & weight

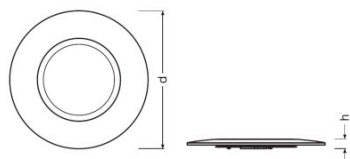

| | |
|----------------|----------|
| Diameter | 380.0 mm |
| Height | 29.0 mm |
| Product weight | 710.00 g |

Colors & materials

| | |
|----------------|--------------------|
| Body material | Polycarbonate (PC) |
| Product color | Gray |
| Housing color | Gray |
| Cover material | Polycarbonate (PC) |

Temperatures & operating conditions

| | |
|---------------------------|--------------|
| Ambient temperature range | -20...+40 °C |
|---------------------------|--------------|

Lifespan

| | |
|-----------------------------------|---------|
| Number of switching cycles | 50000 |
| Lifespan | 20000 h |

Additional product data

| | |
|--------------------------|----------------|
| Mounting type | Surface |
| Mounting location | Ceiling / Wall |

Capabilities

| | |
|-------------------------------|-----------------|
| Dimmable | No |
| Type of connection | Screw terminal |
| LED module replaceable | Not replaceable |

Certificates & standards

| | |
|---------------------------|---------------|
| Protection class | II |
| Type of protection | IP20 |
| Standards | CE/REACH/RoHS |

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075228399 | Folding carton box 1 | 385 mm x 35 mm x 388 mm | 759.00 g | 5.23 dm ³ |
| 4058075228405 | Shipping carton box 10 | 399 mm x 366 mm x 405 mm | 8093.00 g | 59.14 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.