

PRODUCT FAMILY DATASHEET

LED SPOT

Ceiling mounted luminaires available as GU10 or G9 spot luminaires

AREAS OF APPLICATION

- Indoor applications
- Corridors, entrance areas, stairwells, living rooms, basements
- Kitchens, workspaces
- Ceiling and wall surface mounting



PRODUCT BENEFITS

- Energy savings of up to 90 % compared to halogen lamp spotlights
- Timeless design
- Flexible thanks to replaceable LED lamps
- Easy mounting

PRODUCT FEATURES

- Luminaire family features five versions with up to 6 spot heads
- Available as GU10 or G9 spot luminaires
- Housing surface made of brushed nickel
- G9 spot versions with diffuser made of frosted glass
- Adjustable head




TECHNICAL DATA


Product description	Electrical data				Photometrical data		Light technical data	Dimensions & weight			
	Nominal wattage	Nominal voltage	Mains frequency	Max. power consumption	Color temperature	Luminous flux	Beam angle	Length	Width	Height	Product weight
LED SPOT GU10 1x3 W 2700	3.00 W	220...240 V	50/60 Hz	3 W	2700 K	240 lm	120 °	80.0 mm	80.0 mm	130.0 mm	220.00 g
LED SPOT GU10 2x3 W 2700	6.00 W	220...240 V	50/60 Hz	6 W	2700 K	240 lm	120 °	275.0 mm	80.0 mm	146.0 mm	410.00 g
LED SPOT GU10 3x3 W 2700	9.00 W	220...240 V	50/60 Hz	9 W	2700 K	720 lm	120 °	465.0 mm	80.0 mm	146.0 mm	590.00 g
LED SPOT GU10 4x3 W 2700	12.00 W	220...240 V	50/60 Hz	12 W	2700 K	960 lm	120 °	675.0 mm	80.0 mm	155.0 mm	800.00 g
LED SPOT GU10 6x3 W 2700	18.00 W	220...240 V	50/60 Hz	18 W	2700 K	1440 lm	120 °	1190 mm	80.0 mm	170.0 mm	1300.00 g
LED SPOT G9 1x2 W 2700	1.90 W	220...240 V	50/60 Hz	1,9 W	2700 K	200 lm	120 °	80.0 mm	80.0 mm	142.0 mm	226.00 g
LED SPOT G9 2x2 W 2700	3.80 W	220...240 V	50/60 Hz	3,8 W	2700 K	400 lm	120 °	275.0 mm	80.0 mm	160.0 mm	431.00 g
LED SPOT G9 3x2 W 2700	5.70 W	220...240 V	50/60 Hz	5,7 W	2700 K	600 lm	120 °	465.0 mm	80.0 mm	160.0 mm	620.00 g
LED SPOT G9 4x2 W 2700	7.60 W	220...240 V	50/60 Hz	7,6 W	2700 K	800 lm	120 °	675.0 mm	80.0 mm	170.0 mm	856.00 g
LED SPOT G9 6x2 W 2700	11.40 W	220...240 V	50/60 Hz	11,4 W	2700 K	1200 lm	120 °	1250 mm	80.0 mm	192.0 mm	1364.00 g

Product description	Colors & materials			Temperatures & operating conditions	Lifespan			Additional product data
	Body material	Housing color	Product color	Ambient temperature range	Number of switching cycles	Lifespan	Lifespan	Equipped with lamp
LED SPOT GU10 1x3 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	25000 h	Yes
LED SPOT GU10 2x3 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	25000 h	Yes
LED SPOT GU10 3x3 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	25000 h	Yes
LED SPOT GU10 4x3 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	25000 h	Yes
LED SPOT GU10 6x3 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	25000 h	Yes
LED SPOT G9 1x2 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	15000 h	Yes
LED SPOT G9 2x2 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	15000 h	Yes
LED SPOT G9 3x2 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	15000 h	Yes
LED SPOT G9 4x2 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	15000 h	Yes
LED SPOT G9 6x2 W 2700	Aluminum	Gray	Gray	-20...+40 °C	15000	25000 h	15000 h	Yes


Product description	EAN of included illuminant	Capabilities		Type of connection	Holder designation	Certificates & standards	
		Dimmable	Adjustable			Protection class	Type of protection
LED SPOT GU10 1x3 W 2700		No	Yes	Screw terminal	GU10	I	IP20
LED SPOT GU10 2x3 W 2700		No	Yes	Screw terminal	GU10	I	IP20
LED SPOT GU10 3x3 W 2700		No	Yes	Screw terminal	GU10	I	IP20
LED SPOT GU10 4x3 W 2700		No	Yes	Screw terminal	GU10	I	IP20
LED SPOT GU10 6x3 W 2700		No	Yes	Screw terminal	GU10	I	IP20
LED SPOT G9 1x2 W 2700	4058075811454	No	Yes	Screw terminal	G9	I	IP20
LED SPOT G9 2x2 W 2700	4058075811454	No	Yes	Screw terminal	G9	I	IP20
LED SPOT G9 3x2 W 2700	4058075811454	No	Yes	Screw terminal	G9	I	IP20
LED SPOT G9 4x2 W 2700	4058075811454	No	Yes	Screw terminal	G9	I	IP20
LED SPOT G9 6x2 W 2700	4058075811454	No	Yes	Screw terminal	G9	I	IP20

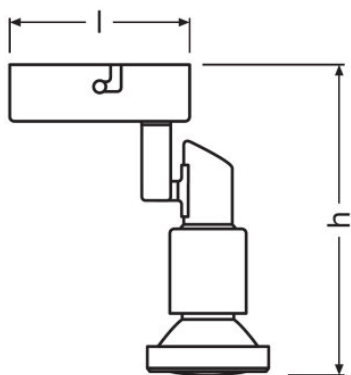


LED SPOT GU10 1x3 W 2700

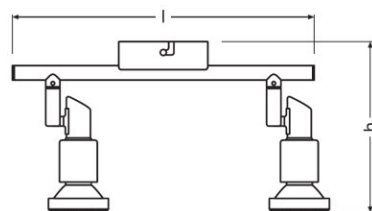





LED SPOT GU10 2x3 W 2700

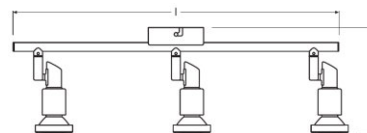

LED SPOT GU10 3x3 W 2700



LED SPOT GU10 4x3 W 2700

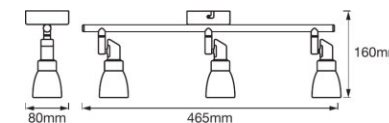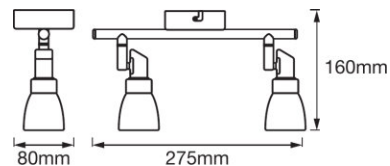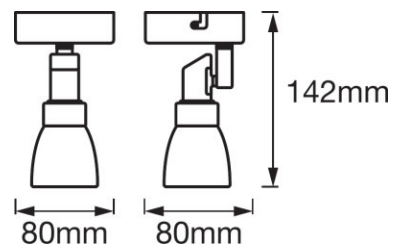



LED SPOT GU10 6x3 W 2700

LED SPOT G9 1x2 W 2700

LED SPOT G9 2x2 W 2700

LED SPOT G9 3x2 W 2700



LED SPOT G9 4x2 W 2700

LED SPOT G9 6x2 W 2700

EQUIPMENT / ACCESSORIES

- Equipped with PAR16 or PIN G9 LED lamps
- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075260818	Shipping carton box 8	225 mm x 205 mm x 265 mm	2722.00 g	12.22 dm ³
4058075260795	Shipping carton box 8	400 mm x 265 mm x 315 mm	4922.00 g	33.39 dm ³
4058075260832	Shipping carton box 8	400 mm x 275 mm x 500 mm	7578.00 g	55.00 dm ³
4058075260856	Shipping carton box 8	485 mm x 295 mm x 390 mm	8704.00 g	55.80 dm ³
4058075260870	Shipping carton box 8	525 mm x 460 mm x 360 mm	13470.00 g	86.94 dm ³
4058075268012	Shipping carton box 8	215 mm x 195 mm x 255 mm	2806.00 g	10.69 dm ³
4058075268036	Shipping carton box 8	400 mm x 265 mm x 315 mm	5334.00 g	33.39 dm ³
4058075268074	Shipping carton box 8	400 mm x 275 mm x 495 mm	8066.00 g	54.45 dm ³
4058075268111	Shipping carton box 8	405 mm x 285 mm x 400 mm	9360.00 g	46.17 dm ³
4058075268135	Shipping carton box 8	525 mm x 460 mm x 360 mm	14302.00 g	86.94 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.