

# PRODUCT FAMILY DATASHEET

## LED THREE STEP DIM CLASSIC A

LED lamps with three-step dimming



---

### AREAS OF APPLICATION

- Wherever dimming was originally not planned
- Residential interiors
- Hospitality
- Outdoor use in outdoor luminaires only (minimum IP65)

---

### PRODUCT BENEFITS

- Easy three-step dimming by repeatedly pressing the wall switch
- Easy and cost-effective operation, no dimmer required
- Low energy consumption
- Easy relamping thanks to compact design
- Instant 100 % light, no warm-up time
- Makes rooms multi-purpose with adjustable light atmosphere

---

### PRODUCT FEATURES

- Dimmable in three steps: 100 %, 45 % and 15 %
- Controllable via standard wall switch
- Good quality of light; color rendering index  $R_a \geq 80$
- Mercury-free lamps




TECHNICAL DATA

Product description	Electrical data				Photometrical data				
	Nominal wattage	Nominal voltage	Max. lamp no. on circuit break. 10 A (B)	Max. lamp no. on circuit break. 16 A (B)	Lumen main.fact.at end of nom.life time	Light color (designation)	Color temperature	Luminous flux	Color rendering index Ra
SST CLAS A 60 7 W/2700K E27 <sup>1)</sup>	7.00 W	220...240 V	505	808	0.70	Warm White	2700 K	806 lm	≥80
SST CLAS A 60 7 W/2700K E27 <sup>1)</sup>	7.00 W	220...240 V	72	116	0.70	Warm White	2700 K	806 lm	≥80

Product description	Dimensions & weight	Temperatures & operating conditions	Lifespan		Additional product data		Capabilities
	Overall length	Ambient temperature range	Nominal lamp life time	Number of switching cycles	Base (standard designation)	Mercury-free	Dimmable
SST CLAS A 60 7 W/2700K E27 <sup>1)</sup>	105.0 mm	-20...+40 °C	15000 h	100000	E27	Yes	No
SST CLAS A 60 7 W/2700K E27 <sup>1)</sup>	105.0 mm	-20...+40 °C	15000 h	100000	E27	Yes	No

Product description	Certificates & standards
	Energy efficiency class
SST CLAS A 60 7 W/2700K E27 <sup>1)</sup>	A++
SST CLAS A 60 7 W/2700K E27 <sup>1)</sup>	A++

<sup>1)</sup> All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

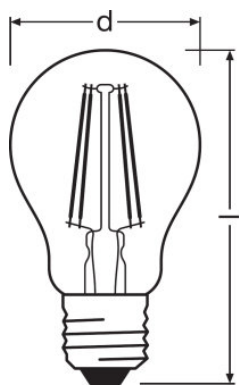

SST CLAS A 60 7 W/2700K E27, SST  
CLAS A 60 7 W/2700K E27

#### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

#### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075269750	Shipping carton box 6	381 mm x 153 mm x 136 mm	445.00 g	7.93 dm <sup>3</sup>
4058075436794	Shipping carton box 4	139 mm x 134 mm x 120 mm	269.00 g	2.24 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.