

# PRODUCT FAMILY DATASHEET

## PLANON Round

Round panel luminaires for wall and ceiling mounting



---

### AREAS OF APPLICATION

- Indoor applications
- Decorative domestic lighting
- Wall and ceiling surface mounting

---

### PRODUCT BENEFITS

- Homogenous light distribution
- Easy and quick installation

---

### PRODUCT FEATURES


- Ceiling luminaire with advanced LED technology
- Available with 400 or 600 mm diameter
- Available with color temperature 3000 K or 4000 K
- Aluminum housing, opal polystyrene diffuser




TECHNICAL DATA

Product description	Electrical data			Photometrical data		Light technical data	Dimensions & weight			Colors & materials	
	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Beam angle	Diameter	Height	Product weight	Body material	Housing color
PLANON Round 400 28 W 3000 K	28.00 W	220...240 V	50/60 Hz	3000 K	2240 lm	110 °	400.0 mm	40.0 mm	1670.00 g	Aluminum	White
PLANON Round 400 28 W 4000 K	28.00 W	220...240 V	50/60 Hz	4000 K	2550 lm	110 °	400.0 mm	40.0 mm	1670.00 g	Aluminum	White
PLANON Round 600 45 W 3000 K	45.00 W	220...240 V	50/60 Hz	3000 K	3700 lm	110 °	600.0 mm	40.0 mm	3115.00 g	Aluminum	White
PLANON Round 600 45 W 4000 K	45.00 W	220...240 V	50/60 Hz	4000 K	4100 lm	110 °	600.0 mm	40.0 mm	3115.00 g	Aluminum	White


Product description	Product color	Light emitting surface material	Temperatures & operating conditions	Lifespan	Capabilities		Certificates & standards	
			Ambient temperature range	Number of switching cycles	Dimmable	Type of connection	Protection class	Type of protection
PLANON Round 400 28 W 3000 K	White	Polystyrene	-20...+40 °C	25000	No	Screw terminal	II	IP20
PLANON Round 400 28 W 4000 K	White	Polystyrene	-20...+40 °C	25000	No	Screw terminal	II	IP20
PLANON Round 600 45 W 3000 K	White	Polystyrene	-20...+40 °C	25000	No	Screw terminal	II	IP20
PLANON Round 600 45 W 4000 K	White	Polystyrene	-20...+40 °C	25000	No	Screw terminal	II	IP20

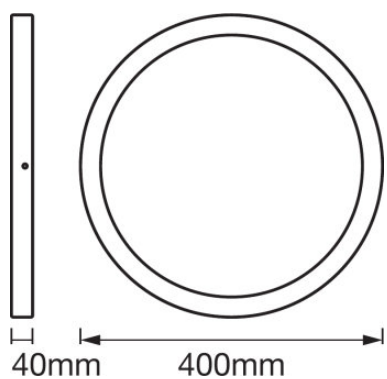


PLANON Round 400 28 W 3000 K

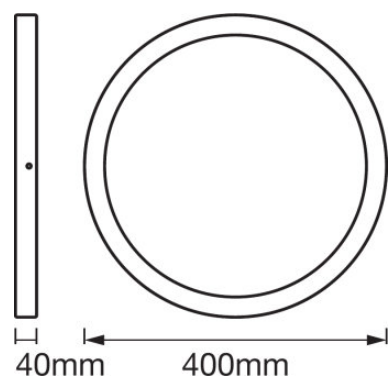

PLANON Round 400 28 W 4000 K

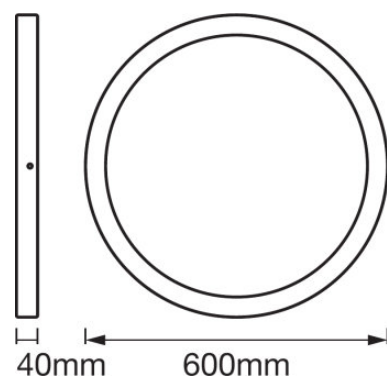

PLANON Round 600 45 W 3000 K

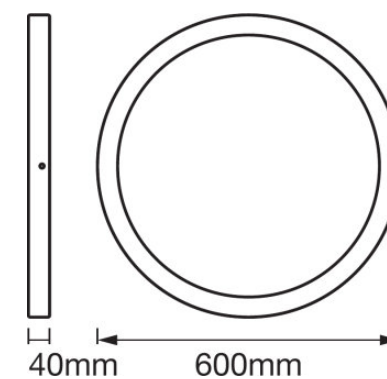

PLANON Round 600 45 W 4000 K

### EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included
- Driver included

### APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075266933	Shipping carton box 5	460 mm x 350 mm x 460 mm	10868.00 g	74.06 dm <sup>3</sup>
4058075266957	Shipping carton box 5	460 mm x 350 mm x 460 mm	11866.00 g	74.06 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075267015	Shipping carton box 5	660 mm x 350 mm x 660 mm	21690.00 g	152.46 dm <sup>3</sup>
4058075267039	Shipping carton box 5	660 mm x 350 mm x 660 mm	21320.00 g	152.46 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.