

PRODUCT FAMILY DATASHEET

LED BULKHEAD

Wall and ceiling luminaires



AREAS OF APPLICATION

- Outdoor
- Basements, garages, warehouses

PRODUCT BENEFITS

- Easy and quick installation
- Energy-efficient thanks to LED technology

PRODUCT FEATURES



- Bright and functional outdoor LED luminaires
- Type of protection: IP54



TECHNICAL DATA

Product description	Electrical data			Photometrical data		Light technical data	Dimensions & weight				Colors & materials
	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Beam angle	Length	Width	Height	Product weight	Body material
LED BULKHEAD 11 W 4000 K BK	11.00 W	220...240 V	50/60 Hz	4000 K	800 lm	120 °	216.0 mm	143.0 mm	79.0 mm	245.00 g	Polycarbonate (PC)
LED BULKHEAD 11 W 4000 K WT	11.00 W	220...240 V	50/60 Hz	4000 K	800 lm	120 °	216.0 mm	143.0 mm	79.0 mm	245.00 g	Polycarbonate (PC)
LED BULKHEAD 6 W 4000 K BK	5.50 W	220...240 V	50/60 Hz	4000 K	450 lm	120 °	117.0 mm	168.0 mm	70.0 mm	175.00 g	Polycarbonate (PC)
LED BULKHEAD 6 W 4000 K WT	5.50 W	220...240 V	50/60 Hz	4000 K	450 lm	120 °	117.0 mm	168.0 mm	70.0 mm	175.00 g	Polycarbonate (PC)

Product description	Housing color	Product color	Cover material	Temperatures & operating conditions	Lifespan	Capabilities		Certificates & standards	
				Ambient temperature range	Number of switching cycles	Dimmable	Type of connection	Protection class	Type of protection
LED BULKHEAD 11 W 4000 K BK	Black	Black	Acrylonitrile butadiene styr	-20...+40 °C	100000	No	Screw terminal	II	IP54
LED BULKHEAD 11 W 4000 K WT	White	White	Acrylonitrile butadiene styr	-20...+40 °C	100000	No	Screw terminal	II	IP54
LED BULKHEAD 6 W 4000 K BK	Black	Black	Acrylonitrile butadiene styr	-20...+40 °C	100000	No	Screw terminal	II	IP54
LED BULKHEAD 6 W 4000 K WT	White	White	Acrylonitrile butadiene styr	-20...+40 °C	100000	No	Screw terminal	II	IP54

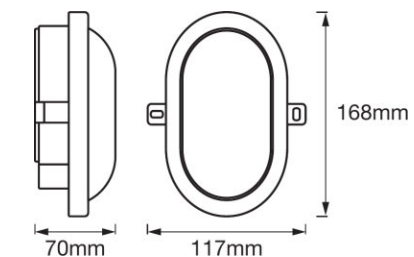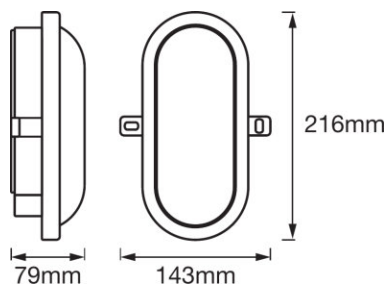

LED BULKHEAD 11 W 4000 K BK, LED
BULKHEAD 11 W 4000 K WT

LED BULKHEAD 6 W 4000 K BK, LED
BULKHEAD 6 W 4000 K WT

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075271692	Shipping carton box 6	315 mm x 273 mm x 245 mm	1982.00 g	21.07 dm ³
4058075271678	Shipping carton box 6	315 mm x 273 mm x 245 mm	1982.00 g	21.07 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075271654	Shipping carton box 8	327 mm x 263 mm x 196 mm	1924.00 g	16.86 dm ³
4058075271593	Shipping carton box 8	327 mm x 263 mm x 196 mm	1924.00 g	16.86 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.