

PRODUCT DATASHEET

SPYLUX White

SPYLUX | Little helpers



PRODUCT BENEFITS

- Can be removed from the holder for use as a portable light

PRODUCT FEATURES

- Battery operated dustproof and splashproof luminaire
- Rotating head for versatile use
- Integrated motion sensor



TECHNICAL DATA

Electrical data

Nominal wattage	0.3 W
Operating mode	Battery
Nominal voltage	4.5 V


Photometrical data

Color temperature	3000 K
Color rendering index Ra	>85
Light color (designation)	Warm white
Luminous flux	17 lm
Luminous efficacy	57 lm/W

Luminaire sensor data

Type of sensor	Motion
Sensor technology	Passive infrared (PIR)

Dimensions & weight

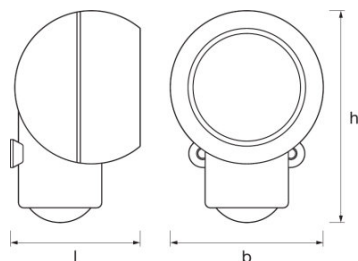

Length	68.0 mm
Width	68.0 mm
Height	99.0 mm
Product weight	105.00 g

Colors & materials

Body material	Polycarbonate (PC)
Product color	White
Housing color	White

Temperatures & operating conditions

Ambient temperature range	-20...+30 °C
----------------------------------	--------------

Additional product data

Mounting type	Surface
Mounting location	Wall

Capabilities

Dimmable	No
LED module replaceable	Not replaceable
Adjustable	Yes

Certificates & standards

Protection class	III
Type of protection	IP43
Standards	CE/EAC/REACH/RoHS

EQUIPMENT / ACCESSORIES

- Can be mounted with screws, adhesive strip or magnet

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075227835	Blister 1	68 mm x 140 mm x 390 mm	125.00 g	3.71 dm ³
4058075227842	Shipping carton box 6	421 mm x 154 mm x 210 mm	941.00 g	13.62 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.