

# PRODUCT FAMILY DATASHEET

## SPYLUX

### Little helpers



---

#### PRODUCT BENEFITS

- Can be removed from the holder for use as a portable light

---

#### PRODUCT FEATURES

- Battery operated dustproof and splashproof luminaire
- Rotating head for versatile use
- Integrated motion sensor




## TECHNICAL DATA

## PRODUCT FAMILY DATASHEET

Product description	Electrical data		Photometrical data		Luminaire sensor data	Dimensions & weight				Colors & materials
	Nominal wattage	Nominal voltage	Color temperature	Luminous flux	Type of sensor	Length	Width	Height	Product weight	Body material
SPYLUX White	0.3 W	4.5 V	3000 K	17 lm	Motion	68.0 mm	68.0 mm	99.0 mm	105.00 g	Polycarbonate (PC)

Product description	Housing color	Product color	Temperatures & operating conditions	Capabilities			Certificates & standards	
			Ambient temperature range	Dimmable	LED module replaceable	Adjustable	Protection class	Type of protection
SPYLUX White	White	White	-20...+30 °C	No	Not replaceable	Yes	III	IP43

Product description	Standards
SPYLUX White	CE/EAC/REACH/RoHS

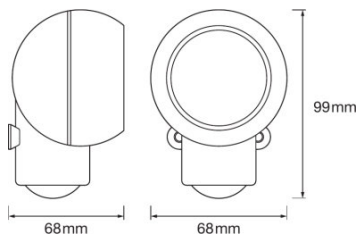


---

Product line drawing

---

**EQUIPMENT / ACCESSORIES**

- Can be mounted with screws, adhesive strip or magnet

---

**APPLICATION ADVICE**

For more detailed application information and graphics please see product datasheet.

---

**DISCLAIMER**

- Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.