

PRODUCT DATASHEET

ST8U-EM 8 W/4000K 300 mm

SubstiTUBE U-Shape | U-shaped LED tubes for electromagnetic control gears



AREAS OF APPLICATION

- Street and city lighting
- Industry

PRODUCT BENEFITS

- Quick, simple and safe replacement without rewiring
- Energy savings of up to 65 % (compared to T8 fluorescent lamp on CCG)
- Instant-on light, therefore ideally suitable in combination with sensor technology
- Very high resistance to switching loads
- Also suitable for operation at low temperatures

PRODUCT FEATURES

- Double-capped LED alternative to classic T8 U-shaped fluorescent lamps in CCG luminaires
- Uniform illumination
- Mercury-free and RoHS compliant
- High luminous efficacy: up to 137 lm/W
- Lifetime: up to 50,000 h
- Type of protection: IP20



TECHNICAL DATA

Electrical data

Rated wattage	8.00 W
Nominal voltage	220...240 V
Operating frequency	50...60 Hz
Nominal wattage	8.00 W
Nominal current	0.045 A
Type of current	AC
Max. lamp no. on circuit break. 10 A (B)	170
Max. lamp no. on circuit break. B10 A - CCG without compensation	170
Max. lamp no. on circuit break. B10 A - CCG with compensation	170
Max. lamp no. on circuit break. B16 A - CCG without compensation	270
Max. lamp no. on circuit break. B16 A - CCG with compensation	270
Max. lamp no. on circuit break. 16 A (B)	270
Total harmonic distortion	12.5 %
Inrush current	20 A
Power factor λ	> 0.90


Photometrical data

Rated color temperature	4000 K
Nominal luminous flux	1100 lm
Rated luminous flux	1100 lm
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Cool White
Color temperature	4000 K
Luminous flux	1100 lm
Color rendering index Ra	≥ 80
Standard deviation of color matching	≤ 6 sdc

Light technical data

Starting time	< 0.5 s
Warm-up time (60 %)	< 0.50 s
Rated beam angle (half peak value)	130.00 °

Dimensions & weight

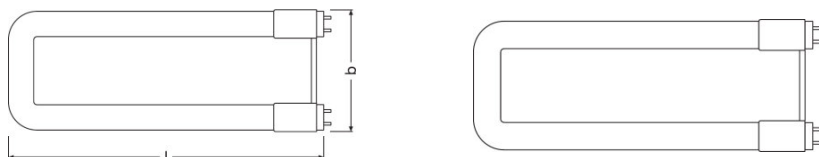

Product weight	93.00 g
Overall length	305.0 mm

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	73 °C

Lifespan

Lifespan	50000 h
Nominal lamp life time	50000 h
Rated lamp life time	50000 h
Number of switching cycles	200000

Additional product data

Base (standard designation)	2G13
Mercury-free	Yes

Capabilities

Dimmable	No
-----------------	----

Certificates & standards

Type of protection	IP20
Standards	CE
Energy efficiency class	A++
Energy consumption	8 kWh/1000h

Country-specific categorizations

Order reference	ST8-USHP0.3M 8W
------------------------	-----------------

EQUIPMENT / ACCESSORIES

- Suitable for operation with low-loss and conventional control gears

SAFETY ADVICE

Not suitable for operation with electronic control gear.

Operation in outdoor applications in suitable damp-proof luminaires possible according to data sheet and installation instruction.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075284685	Folding carton box 1	33 mm x 124 mm x 325 mm	130.00 g	1.33 dm ³
4058075284692	Shipping carton box 10	332 mm x 256 mm x 182 mm	1423.00 g	15.47 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

LEGAL ADVICE

When used to replace a T8 fluorescent lamp the total energy efficiency and light distribution depends on the design of the lighting system.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.