

PRODUCT FAMILY DATASHEET

SENSOR WALL 110DEG

Stand-alone motion and light sensors for wall mounting with 110° detection range



AREAS OF APPLICATION

- Outdoor
- Corridors, entrance areas
- Garages
- Basement
- Arcade passage

PRODUCT BENEFITS

- Sensor for optimized energy savings

PRODUCT FEATURES


- Switch-on by movement
- Type of protection: IP44
- Protection class: II



TECHNICAL DATA

Product description	Electrical data		Luminaire sensor data	Dimensions & weight				Colors & materials		Temperatures & operating conditions
	Nominal voltage	Mains frequency	Type of sensor	Length	Width	Height	Product weight	Body material	Product color	Ambient temperature range
SENSOR WALL 110DEG IP44 WT	220...240 V	50/60 Hz	Light / Motion	60.0 mm	77.0 mm	72.0 mm	89.00 g	Polycarbonate (PC)	White	-10...+40 °C
SENSOR WALL 110DEG IP44 DG	220...240 V	50/60 Hz	Light / Motion	60.0 mm	77.0 mm	72.0 mm	89.00 g	Polycarbonate (PC)	Dark grey	-10...+40 °C

Product description	Capabilities		Certificates & standards	
	Dimmable	Type of connection	Protection class	Type of protection
SENSOR WALL 110DEG IP44 WT	No	Screw terminal, 3-Pole	II	IP44
SENSOR WALL 110DEG IP44 DG	No	Screw terminal, 3-Pole	II	IP44

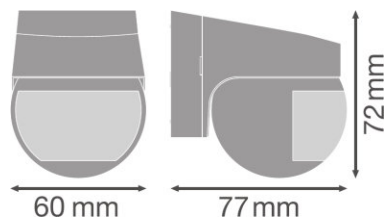

SENSOR WALL 110DEG IP44 WT,
SENSOR WALL 110DEG IP44 DG

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075244740	Shipping carton box 8	170 mm x 144 mm x 204 mm	1273.00 g	4.99 dm ³
4058075244764	Shipping carton box 8	170 mm x 144 mm x 204 mm	1273.00 g	4.99 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.