

PRODUCT FAMILY DATASHEET

ENDURA PRO UPDOWN SENSOR

Modern shaped wall sensor luminaires with light outlet up and down



AREAS OF APPLICATION

- Outdoor
- Building facades
- Arcade passage

PRODUCT BENEFITS

- Decorative wall light
- Easy and quick installation

PRODUCT FEATURES

- 4 operating modes selectable (light 6h continuous on, standby, switch-on by movement or dusk)
- Type of protection: IP55
- Impact resistance: IK05
- Protection class: II




TECHNICAL DATA

| Product description | Electrical data | | | Luminaire control gear data | Photometrical data | | Light technical data | Luminaire sensor data | Dimensions & weight | |
|--|-----------------|-----------------|-----------------|-----------------------------|--------------------|---------------|----------------------|-----------------------|---------------------|---------|
| | Nominal wattage | Nominal voltage | Mains frequency | Output current | Color temperature | Luminous flux | Beam angle | Type of sensor | Length | Width |
| ENDURA PRO UPDOWN SENSOR 10W 840 IP55 WT | 10.00 W | 220...240 V | 50/60 Hz | 223...247 mA | 4000 K | 1000 lm | 50 ° | Light / Motion | 87.0 mm | 55.0 mm |
| ENDURA PRO UPDOWN SENSOR 10W 840 IP55 DG | 10.00 W | 220...240 V | 50/60 Hz | 223...247 mA | 4000 K | 1000 lm | 50 ° | Light / Motion | 87.0 mm | 55.0 mm |

| Product description | Height | Product weight | Colors & materials | | | | Temperatures & operating conditions | Lifespan | Capabilities |
|--|----------|----------------|--------------------|---------------|---------------|--------------------|-------------------------------------|----------------------------|--------------|
| | | | Body material | Housing color | Product color | Cover material | Ambient temperature range | Number of switching cycles | Dimmable |
| ENDURA PRO UPDOWN SENSOR 10W 840 IP55 WT | 180.0 mm | 312.00 g | Polycarbonate (PC) | White | White | Polycarbonate (PC) | -20...+40 °C | 15000 | No |
| ENDURA PRO UPDOWN SENSOR 10W 840 IP55 DG | 180.0 mm | 312.00 g | Polycarbonate (PC) | Dark gray | Dark grey | Polycarbonate (PC) | -20...+40 °C | 15000 | No |

| Product description | Type of connection | Certificates & standards | |
|--|-----------------------------|--------------------------|--------------------|
| | | Protection class | Type of protection |
| ENDURA PRO UPDOWN SENSOR 10W 840 IP55 WT | Terminal, 3-Pole (L, N, PE) | II | IP55 |
| ENDURA PRO UPDOWN SENSOR 10W 840 IP55 DG | Terminal, 3-Pole (L, N, PE) | II | IP55 |

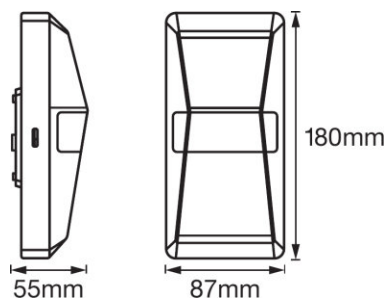

ENDURA PRO UPDOWN SENSOR 10W
 840 IP55 WT, ENDURA PRO UPDOWN
 SENSOR 10W 840 IP55 DG

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|----------------------|
| 4058075228955 | Shipping carton box 6 | 225 mm x 200 mm x 206 mm | 2314.00 g | 9.27 dm ³ |
| 4058075228979 | Shipping carton box 6 | 225 mm x 200 mm x 206 mm | 2314.00 g | 9.27 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.