

PRODUCT FAMILY DATASHEET

SENSOR CEILING FLUSH IP20

Stand-alone motion and light sensors for flush ceiling mounting



AREAS OF APPLICATION

- Indoor
- Stairways
- Basement
- Restrooms

PRODUCT BENEFITS

- Sensor for optimized energy savings
- Compact design

PRODUCT FEATURES


- 2 operating modes selectable (light 6h continuous on, switch-on by movement)
- Type of protection: IP20
- Protection class: II



TECHNICAL DATA

Product description	Electrical data		Luminaire sensor data	Dimensions & weight			Colors & materials		Temperatures & operating conditions	Capabilities
	Nominal voltage	Mains frequency	Type of sensor	Diameter	Height	Product weight	Body material	Product color	Ambient temperature range	Dimmable
SENSOR CEILING FLUSH 360DEG IP20 WT	220...240 V	50/60 Hz	Light / Motion	83.0 mm	63.0 mm	80.00 g	Polycarbonate (PC)	White	-20...+40 °C	No

Product description	Type of connection	Certificates & standards	
		Protection class	Type of protection
SENSOR CEILING FLUSH 360DEG IP20 WT	Screw terminal, 3-Pole	II	IP20

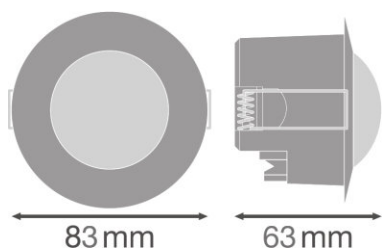

SENSOR CEILING FLUSH 360DEG IP20 WT

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075240322	Shipping carton box 8	190 mm x 190 mm x 160 mm	1163.00 g	5.78 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.