

PRODUCT DATASHEET

SENSOR CEILING 360DEG IP44 WT

SENSOR CEILING IP44 | Stand-alone motion and light sensors for ceiling mounting



AREAS OF APPLICATION

- Indoor
- Stairways
- Basement
- Restrooms

PRODUCT BENEFITS

- Sensor for optimized energy savings
- Compact design

PRODUCT FEATURES

- 2 operating modes selectable (light 6h continuous on, switch-on by movement)
- Type of protection: IP44
- Protection class: II



TECHNICAL DATA


Electrical data

Nominal voltage	220...240 V
Mains frequency	50/60 Hz

Luminaire sensor data

Type of sensor	Light / Motion
Sensor technology	Passive infrared (PIR)
Sensor detection angle	360 °
Detection range of motion sensor	6 m
Detection threshold of daylight sensor	1...1000 lx
Sensor controlled switching time	2 s...15 min

Dimensions & weight

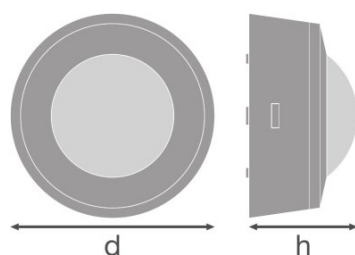

Diameter	92.0 mm
Height	50.0 mm
Product weight	117.00 g

Colors & materials

Body material	Polycarbonate (PC)
Product color	White

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
----------------------------------	--------------

Additional product data

Mounting type	Surface
Mounting location	Ceiling

Capabilities

Dimmable	No
Type of connection	Screw terminal, 3-Pole

Certificates & standards

Protection class	II
Type of protection	IP44
Standards	CE/EAC/REACH/RoHS

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075244719	Folding carton box 1	100 mm x 100 mm x 74 mm	148.00 g	0.74 dm ³
4058075244726	Shipping carton box 8	210 mm x 210 mm x 164 mm	1231.00 g	7.23 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.