

PRODUCT FAMILY DATASHEET

WORKLIGHTS R-STAND SOCKET (GEN 1)

Flexible, portable worklight with included power outlets



AREAS OF APPLICATION

- Renovation
- Garages
- Basement
- Workshops

PRODUCT BENEFITS

- 2 in 1, worklight and multisocket
- Energy savings of up to 80% compared to halogen lamp worklights
- Semi-frosted, tempered glass cover for uniform illumination

PRODUCT FEATURES

- Equipped with two power outlets, for loads up to 3000 W
- Power outlet protected by self-closing cover
- Built-in switch to control the light, power outlets remain constantly powered
- Quick-release fastener for adjustment of luminaire head angle
- 3 m cable with type E/F plug




TECHNICAL DATA

Product description	Electrical data			Photometrical data		Light technical data	Dimensions & weight				Colors & materials
	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Beam angle	Length	Width	Height	Product weight	Body material
LED WORKLIGHT R-STAND SOCKET 30 W 4000 K	30.00 W	220...240 V	50/60 Hz	4000 K	2700 lm	120 °	190.0 mm	220.0 mm	290.0 mm	1800.00 g	Aluminum/Steel

Product description	Housing color	Product color	Light emitting surface material	Temperatures & operating conditions	Capabilities			Certificates & standards
				Ambient temperature range	Dimmable	Adjustable	Type of connection	Protection class
LED WORKLIGHT R-STAND SOCKET 30 W 4000 K	Dark gray	Dark gray	Glass	-20...+45 °C	No	Yes	Protective contact Plug type	I

Product description	Type of protection
LED WORKLIGHT R-STAND SOCKET 30 W 4000 K	IP44

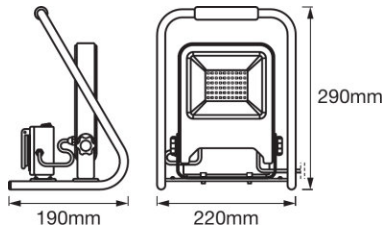

LED WORKLIGHT R-STAND SOCKET 30
W 4000 K

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075204621	Shipping carton box 4	475 mm x 450 mm x 330 mm	10630.00 g	70.54 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.