

PRODUCT FAMILY DATASHEET

ENDURA STYLE SOLAR DOUBLE CIRCLE

Solar-powered lantern luminaires with motion and light sensor, two circles



AREAS OF APPLICATION

- Outdoor use (IP44)
- Areas where no power supply is available

PRODUCT BENEFITS

- Demand based lighting and energy saving thanks to motion and daylight sensor
- Easy adjustment of daylight and motion detection via push switch
- Energy-efficient thanks to LED technology
- Easy and quick installation

PRODUCT FEATURES

- Solar powered outdoor LED luminaire
- PIR motion and daylight sensor
- 3 operating modes selectable
- Operating mode 1: light continuous on with 200 lumen (Max. 2.5 hours at full charge)
- Operating mode 2: light continuous on with 75 lumen (Max. 8 hours at full charge), switches to 300 lumen when moving (Max. 100 times lit at full charge)
- Operating mode 3: light off, switches to 400 lumen when moving (Max. 100 times lit at full charge)
- Battery charging via solar panel




- Battery technology: lithium-ion
- Stainless steel housing

TECHNICAL DATA

Product description	Electrical data			Photometrical data		Luminaire sensor data	Dimensions & weight				
	Nominal wattage	Nominal voltage	Mains frequency	Color temperature	Luminous flux	Type of sensor	Diameter	Height	Product weight	Length	Width
ENDURA STYLE Solar Sensor Post Double Circle 40CM 6W BK	6.00 W	3.2 V	0 Hz	3000 K	400 lm	Light / Motion	178.0 mm	400.0 mm	720.00 g		
ENDURA STYLE Solar Sensor Post Double Circle 40CM 6W ST	6.00 W	3.2 V	0 Hz	3000 K	400 lm	Light / Motion	178.0 mm	400.0 mm	720.00 g		
ENDURA STYLE Solar Sensor Wall Double Circle 6W BK	6.00 W	3.2 V	0 Hz	3000 K	400 lm	Light / Motion		220.0 mm	680.00 g	185.0 mm	178.0 mm
ENDURA STYLE Solar Sensor Wall Double Circle 6W ST	6.00 W	3.2 V	0 Hz	3000 K	400 lm	Light / Motion		220.0 mm	680.00 g	185.0 mm	178.0 mm

Product description	Colors & materials				Temperatures & operating conditions	Lifespan	Capabilities	Certificates & standards	
	Body material	Housing color	Product color	Cover material	Ambient temperature range	Number of switching cycles	Dimmable	Protection class	Type of protection
ENDURA STYLE Solar Sensor Post Double Circle 40CM 6W BK	Stainless steel	Black	Black	Polycarbonate (PC)	-20...+40 °C	12500	Yes	III	IP44
ENDURA STYLE Solar Sensor Post Double Circle 40CM 6W ST	Stainless steel	Steel	Steel	Polycarbonate (PC)	-20...+40 °C	12500	Yes	III	IP44
ENDURA STYLE Solar Sensor Wall Double Circle 6W BK	Stainless steel	Black	Black	Polycarbonate (PC)	-20...+40 °C	12500	Yes	III	IP44
ENDURA STYLE Solar Sensor Wall Double Circle 6W ST	Stainless steel	Steel	Steel	Polycarbonate (PC)	-20...+40 °C	12500	Yes	III	IP44

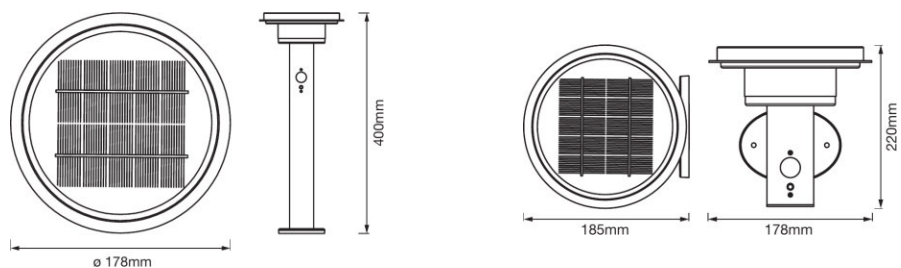

ENDURA STYLE Solar Sensor Post
Double Circle 40CM 6W BK, ENDURA
STYLE Solar Sensor Post Double Circle
40CM 6W ST

ENDURA STYLE Solar Sensor Wall
Double Circle 6W BK, ENDURA STYLE
Solar Sensor Wall Double Circle 6W ST

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075392755	Shipping carton box 4	396 mm x 394 mm x 447 mm	5019.00 g	69.74 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075392717	Shipping carton box 4	396 mm x 394 mm x 447 mm	5019.00 g	69.74 dm ³
4058075392731	Shipping carton box 4	396 mm x 394 mm x 262 mm	4365.00 g	40.88 dm ³
4058075392694	Shipping carton box 4	396 mm x 394 mm x 262 mm	4365.00 g	40.88 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.