

PRODUCT DATASHEET

Decor Tokio Pendant

Decor Tokio | Decorative luminaires with led integrated



Areas of application

- Corridors
- Entrance areas
- Living rooms
- Bedrooms
- Offices

Product benefits

- Elegant design
- Japanese design

Product features

- 3000 K
- Housing material: metal
- Decorative Luminaire



TECHNICAL DATA

Electrical data


Nominal wattage	14.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	76.000 mA
Inrush current time T_{h50}	1900 μ s
Power factor λ	≥ 0.7
Protection class	II

Photometrical data

Luminous flux	850 lm
Total luminous flux of contained light sources	1260 lm
Luminous efficacy	60 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	6 sdcn
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG1

Dimensions & Weight

Length	340.00 mm
Width	315.00 mm
Height	1500.00 mm
Product weight	1050.00 g

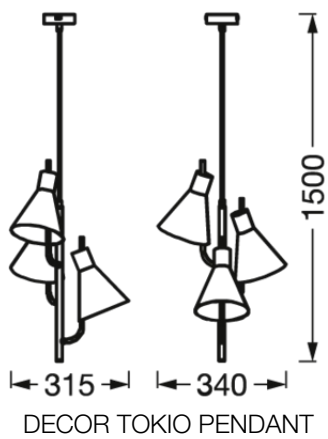

Materials & Colors

Product color	Black
Housing color	Black
Body material	Steel
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Terminal, 2-Pole (L, N)
Type of protection	IP20
Dimmable	No
Mounting type	Surface
Application environment	Indoor
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	30000 h ¹⁾
Number of switching cycles	30000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

Standards	CE / UKCA
-----------	-----------

Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable




EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Check wall-ceiling for suitability. If uncertain, seek professional advice.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	DECOR TOKIO
	Declarations of conformity	DECOR TOKIO
	Declarations of conformity UKCA	Fixed LUM

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075757066	Folding box 1	362 mm x 362 mm x 553 mm	1604.00 g	72.47 dm ³
4058075757073	Shipping box 2	747 mm x 385 mm x 578 mm	4657.00 g	166.23 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.