

## PRODUCT DATASHEET

DALI PCU TW | Light management systems



### Areas of application

- Conference rooms
- Restaurants
- Shop lighting
- Private homes

### Product benefits

- Suitable for Standard DALI and DALI DT8 (TW) drivers
- Intuitive manual dimming, switching and changing of colour temperature
- Individual setting of minimal brightness level
- Individual setting of colour temperature range
- Integrated Bus Power Supply

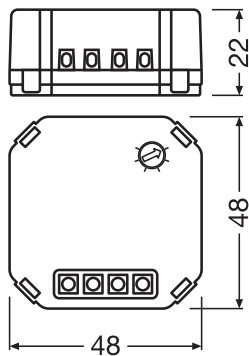
### Product features

- Flush-mounted control unit for dimmable DALI drivers
- Up to 4 DALI PCU TW G2 can be connected in parallel to set up multiple control points
- Automatic synchronization between the control points
- Combinable with standard presence- and motion detectors with mains contact
- Behavior after power failure configurable
- Length of the DALI control cable: up to 300 m

---

**TECHNICAL DATA****Electrical data**

Nominal wattage	2.00 W
Nominal voltage	230 V
Type of current	AC/DC
Mains frequency	50/60 Hz

**Dimensions & Weight**

Length	49.00 mm
Width	48.00 mm
Height	22.00 mm
Product weight	49.4 g

**Colors & materials**

Product color	White
---------------	-------

**Temperatures & operating conditions**

Ambient temperature range	0...+50 °C
---------------------------	------------

**Additional product data**

Product remark	Available from September 2023
Number of control outputs	1
Groups	1

**Capabilities**

---

Dimmable	Yes
Dimming interface	DALI-2
Number of control outputs	1
Type of installation	Integrated in flush device box


### Certificates & Standards

Approval marks – approval	CE / UKCA
Protection class	II
Type of protection	IP20
Energy efficiency class	A1

### EQUIPMENT / ACCESSORIES

- Suitable for up to 25 electronic control gears
- Cover and rotary knob included

### DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	DALI PCU TW G2

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899631625	Folding box 1	85 mm x 85 mm x 35 mm	68.00 g	0.25 dm <sup>3</sup>
4052899631632	Shipping box 24	273 mm x 182 mm x 164 mm	1837.00 g	8.15 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.