


# PRODUCT DATASHEET

## LN INV 1200 THROUGHWIRING KIT

LINEAR INDIVILED THROUGH-WIRING KIT | Cable and plug set for light line installation in 1200 mm and 1500 mm

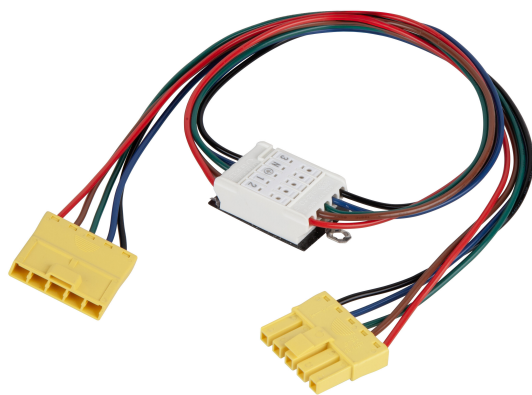

---

### Product benefits

- Easy and quick electrical connection for light line installation
- Through wire connection with AC plug

---

### Product features


- Through wiring cable kit for light lines (5 x 2.5 mm<sup>2</sup> internal wiring and terminal plug, male/female AC plug)
- Cable length: 1.2 m or 1.5 m



TECHNICAL DATA

Dimensions & Weight

Length	1430 mm
Width	28 mm
Height	14 mm
Product weight	127.00 g



LN INV 1200 THROUGHWIRING  
KIT

Materials & Colors

Product color	Yellow
Body material	Polystyrene (PS)

Application & Mounting

With light source	No
Replaceable light source	No








Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No

Safety advice

- All electrical connections must be made by a qualified person.

DOWNLOAD DATA


Documents and certificates		Document name
	User instruction / safety instructions	LN INV accessories
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11218828
	Legal information	LN INV Accessories
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
Tender texts		Document name
	Tender documents	LINEAR INDIVILED THROUGH WIRING KIT-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854214820	Folding box 1	132 mm x 142 mm x 42 mm	171.00 g	0.79 dm <sup>3</sup>
4099854214837	Shipping box 64	557 mm x 397 mm x 314 mm	12308.00 g	69.43 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.