

PRODUCT DATASHEET

LN INV D 1200 P 40W 930 PS WT

LINEAR INDIVILED DIRECT 1200 PS | Surface mounted luminaire for single or light line office application with CRI90 and power select (PS) feature, 1200 mm



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct lighting

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90 and up to 130 lm/W
- Highly versatile due to selectable power steps (Power Select - PS) on the driver
- Symmetric light distribution for various application areas
- High color consistency with SDCM 3
- Easy installation
- Low flicker light thanks to special electronic control gear
- Multiple mounting options thanks to different accessories

Product features

- Minimalistic LEDVANCE SCALE design in extruded aluminum housing, available in white and black color
- Includes EVERLOOP: Convenient replacement of light source and LED driver
- Linkable into seamless light line with accessories (surface or pendant mounting)



- Pendant mounting with suspension kit (to be ordered separately)
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Lifetime (L80/B10): 70,000 h (at 25 °C)


TECHNICAL DATA

Electrical data


Nominal wattage	40 W / 36 W / 30 W / 25 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	185...170...140...120 mA
Inrush current	15 A
Inrush current time T_{h50}	50 μ s
Max. number of luminaires per miniature circuit breaker B16	50
Max. number of luminaires per miniature circuit breaker C10	36
Max. number of luminaires per miniature circuit breaker C16	58
Power factor λ	> 0.90
Total harmonic distortion	$\leq$ 20 %
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	4800 lm / 4400 lm / 3700 lm / 3150 lm
Luminous efficacy	120 lm/W / 122 lm/W / 123 lm/W / 126 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	$\geq$ 90
Standard deviation of color matching	3 sdcm
Low flicker	Yes
Flickering metric (Pst LM)	$\leq$ 1
Stroboscope effect metric (SVM)	$\leq$ 0.4
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 °
UGR	< 19

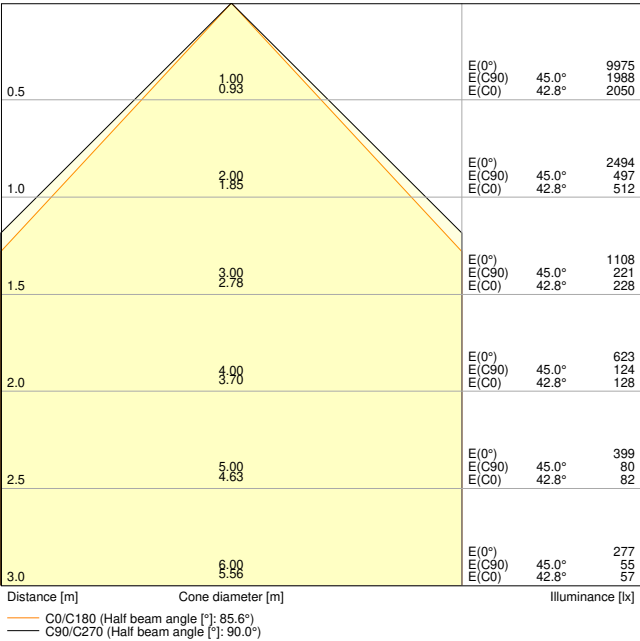

LN INV D 1200 P 40W 930 PS WT 800mA

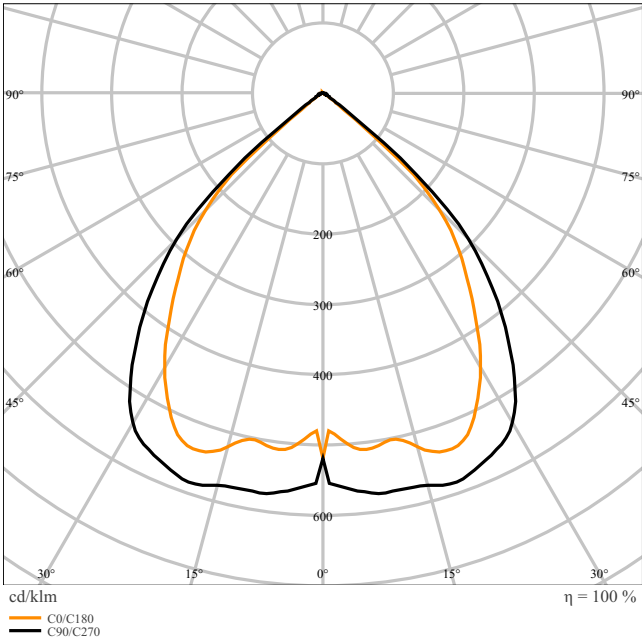


LN INV D 1200 P 40W 930 PS

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
40 W	3000 K	4800 lm	120 lm/W
36 W	3000 K	4400 lm	122 lm/W
30 W	3000 K	3700 lm	123 lm/W
25 W	3000 K	3150 lm	126 lm/W

Dimensions & Weight

Length	1210.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	3200.00 g



LN INV 1200 P

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	70000 h ¹⁾
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	800mA / 700mA / 600mA / 500 mA
ECG - Output ripple current	≤ 5 %
Recommended control gear	OSRAM type IT FIT 40/220-240/800 CS L

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00027-V01.01-EN
Replaceable light source (EPREL)	By the end consumer

Additional product data

Number of illuminants	1
Added function	EVERLOOP / MULTI SELECT

Accessories Optional

Product image	Product name	EAN
	LN INV SUSPENSION KIT WT	4099854215537
	LN INV SUSPENSION WIRE	4099854323980
	LN INV 1200 THROUGHWIRING KIT	4099854214820

Product image	Product name	EAN
	LN INV INLINE CONNECTOR	4099854215612
	LN INV CORNER CONNECTOR WT	4099854308093
	LN INV INFILL 600 WT	4099854214882
	LN INV INFILL 1200 WT	4099854214868
	LN INV INFILL 1500 WT	4099854214844

EQUIPMENT / ACCESSORIES

- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

Upgrade and replacement components

Components Light Source		
Product image	Product name	EAN
	LISOEV 1074x29 48 40W 930 S90U19 GY	4099854284359
Components Driver		

Product image	Product name	EAN
	IT FIT 40/220-240/800 CS L	4062172212700

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	LN INV
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11205497
	Legal information	Legal Insert G11235609
	Legal information	LN INV D DI
	Declarations of conformity	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LN INV D 1200 P 40W 930 PS WT 800mA
	LDT file (Eulumdat)	LN INV D 1200 P 40W 930 PS WT 800mA
	ULD file (DIALux)	LN INV D 1200 P 40W 930 PS WT
	ROLF file (RELUX)	LN INV D 1200 P 40W 930 PS WT


Photometric and lighting design files		Document name
	UGR file (UGR table)	LN INV D 1200 P 40W 930 PS WT 800mA
	Light distribution curve type cone	LN INV D 1200 P 40W 930 PS WT 800mA
	Light distribution curve type polar	LN INV D 1200 P 40W 930 PS
CAD/BIM files		Document name
	BIM Revit 3D	Linear Indiviled G2
	CAD STEP 3D	LN INV D 1200 G2
Tender texts		Document name
	Tender documents	LINEAR INDIVILED DIRECT 1200 PS 1200 P 40W 930 PS WT-EN

LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854135316	Folding box 1	178 mm x 1,263 mm x 103 mm	3800.00 g	23.16 dm ³
4099854135323	Shipping box 2	1,277 mm x 187 mm x 189 mm	9000.00 g	45.13 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.



ADDITIONAL CATALOG INFORMATION

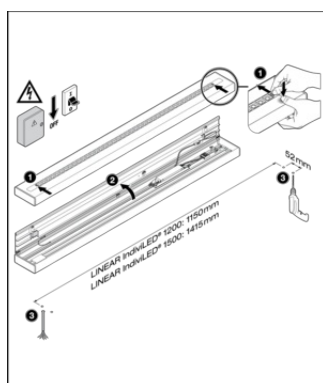

LINEAR Indiviled® DIRECT WT		BY NUMBER		RA	W	SW	W/W
DRIVER		Pos. 1	Pos. 2				
LN INV D 1200 P 40W 930 PS WT	COBAM	OFF	OFF	800	25	3150	120
	BT-FP-40	ON	ON	800	25	3150	120
	SDI-30V	ON	ON	120	30	4300	120
	800-C5L	ON	ON	800	40	4300	120
LN INV D 1200 P 40W 940 PS WT	COBAM	OFF	OFF	800	25	3200	120
	BT-FP-40	ON	ON	800	25	3200	120
	SDI-30V	ON	ON	120	30	4300	120
	800-C5L	ON	ON	800	40	4300	120
LN INV D 1500 P 52W 930 PS WT	COBAM	OFF	OFF	800	40	4300	120
	BT-FP	ON	ON	800	40	4300	120
	SDI-30V	ON	ON	120	40	5000	110
	800-C5L	ON	ON	800	40	5000	110
LN INV D 1500 P 52W 940 PS WT	COBAM	OFF	OFF	800	40	5000	120
	BT-FP	ON	ON	800	40	5000	120
	SDI-30V	ON	ON	120	40	5100	120
	800-C5L	ON	ON	800	40	5100	120



LINEAR Indiviled® DIRECT		BY NUMBER		RA	W	SW	W/W
DRIVER		Pos. 1	Pos. 2				
LN INV D 1200 P 40W 930 PS WT	COBAM	OFF	OFF	800	25	3150	120
	BT-FP-40	ON	ON	800	25	3150	120
	SDI-30V	ON	ON	120	30	4300	120
	800-C5L	ON	ON	800	40	4300	120
LN INV D 1200 P 40W 940 PS WT	COBAM	OFF	OFF	800	25	3200	120
	BT-FP-40	ON	ON	800	25	3200	120
	SDI-30V	ON	ON	120	30	4300	120
	800-C5L	ON	ON	800	40	4300	120
LN INV D 1500 P 52W 930 PS WT	COBAM	OFF	OFF	800	40	4300	120
	BT-FP	ON	ON	800	40	4300	120
	SDI-30V	ON	ON	120	40	5000	110
	800-C5L	ON	ON	800	40	5000	110
LN INV D 1500 P 52W 940 PS WT	COBAM	OFF	OFF	800	40	5000	120
	BT-FP	ON	ON	800	40	5000	120
	SDI-30V	ON	ON	120	40	5100	120
	800-C5L	ON	ON	800	40	5100	120

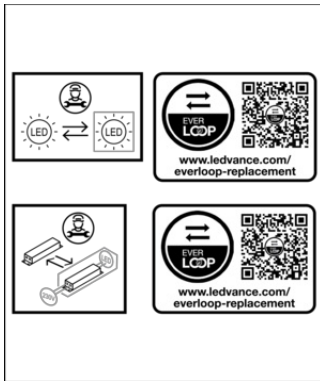

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.