


PRODUCT DATASHEET

M 660 P 66 UM -BF-F7

PV PANELS P-TYPE MONOFACIAL BLACK | PERC monofacial photovoltaic panels with black frame

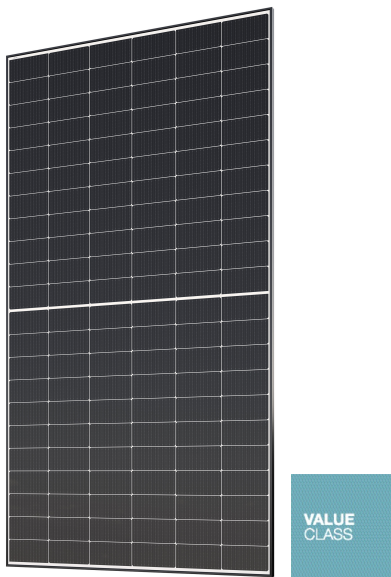

Areas of application

- Commercial and industrial installations
- Residential installations

Product benefits

- 12-years of product guarantee, 25-years of linear power output guarantee
- Limited PID-effect (potential induced degradation) thanks to strict quality control in production process
- Very low yearly degradation of the cells thanks to the better resistance to high temperatures
- Durable design and highest production standards guarantees operational reliability and quality

Product features

- Original Stäubli MC4 EVO 2 connectors
- Available in a long cable version
- Frame made of anodized aluminum alloy
- Multi-bus bar (MBB) technology
- Maximum static load up to 5400 Pa

TECHNICAL DATA

ELECTRICAL DATA STC

Maximum Power Pmax (STC)	660 W
Maximum Power Current Imp (STC)	17.28 A
Short Circuit Current Isc (STC)	18.56 A
Maximum Power Voltage Vmp (STC)	38.20 V
Open Circuit Voltage Voc (STC)	45.20 V
Module efficiency factor (STC)	21,25 %

ELECTRICAL DATA NMOT

Maximum Power Pmax (NMOT)	495 W
Maximum Power Current Imp (NMOT)	13.76 A
Short Circuit Current Isc (NMOT)	14.93 A
Maximum Power Voltage Vmp (NMOT)	36.00 V
Open Circuit Voltage Voc (NMOT)	43.00 V

ELECTRICAL DATA STC and NMOT

Power tolerance	3 %
-----------------	-----

MECHANICAL DATA

Type of Faciality	Monofacial
Cell material	Mono crystalline
Number of cells	132
Number of bypass diodes	3
With frame	Yes
Type of connection	Staubli MC4 EVO2
Width	1303 mm
Length	2384 mm
Height	35 mm
Product weight	35000.000 g
Cable length	1.4 m
Glass with anti-reflection coating	Yes
Colour backsheet	White
Colour cells	Dark blue
Colour frame	Black
Front Glass	2.0 mm coated semi-tempered glass

TEMPERATURE RATINGS

Nominal operating cell temperature	43 °C
Temperature coefficient Isc	0.050 %/K

Temperature coefficient P _{mp}	-0.340 %/K
Temperature coefficient U _{oc}	-0.260 %/K

OPERATING CONDITIONS

Maximum series fuse rating	30 A
Temperature range in operation	-40...+85 °C
Front Side Maximum Static Loading	5400 Pa
Rear Side Maximum Static Loading	2400 Pa
Reverse current load	30 A

EQUIPMENT / ACCESSORIES

- Product is delivered as a whole, no assembly required from customer
- MC4 EVO 2 connectors are fitted to the panel
- 3 bypass diodes are already installed in the panel

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	PV MODULE
	Declarations of conformity	CE Certificate PV Panels

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.