


# PRODUCT DATASHEET

## SMART WIFI CORNER TABLE Magic RGB Tunable White Silver Remote Control

SMART WIFI TABLE CORNER | Smart and modern Table luminaire for indirect illumination with WiFi technology

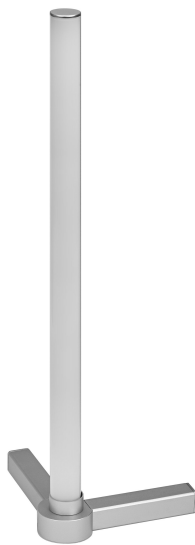

### Areas of application

- Living areas (living rooms, dining rooms, bedrooms etc.)
- Gaming and Entertainment Areas

### Product benefits

- MAGIC RGB Color Control for maximum flexible selection

### Product features

- RGB color control



## TECHNICAL DATA

### Electrical data


|                           |             |
|---------------------------|-------------|
| Nominal wattage           | 7.50 W      |
| Nominal voltage           | 220...240 V |
| Mains frequency           | 50...60 Hz  |
| Nominal current           | 60.000 mA   |
| Inrush current            | 22 mA       |
| Power factor $\lambda$    | > 0.5       |
| Total harmonic distortion | < 130 %     |
| Protection class          | II          |

### Photometrical data

|  |                                    |
|--|------------------------------------|
| Luminous flux  | 500 lm                             |
| Total luminous flux of contained light sources               | 580                                |
| Luminous efficacy  | 67 lm/W                            |
| Color temperature  | 2700...6500 K                      |
| Reference control setting of contained light source (Kelvin) | 2700 K                             |
| Light color (designation)                                    | Tunable White / Red / Green / Blue |
| Color rendering index Ra                                     | > 80                               |
| Standard deviation of color matching                         | < 6 sdcm                           |
| Photobiological safety group acc. to EN62778                 | RG1                                |
| Photobiological safety group acc. to EN62471                 | RG1                                |
| Beam angle   | 120 °                              |

### Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 129.00 mm |
| Width          | 129.00 mm |
| Height         | 425.00 mm |
| Product weight | 490.00 g  |

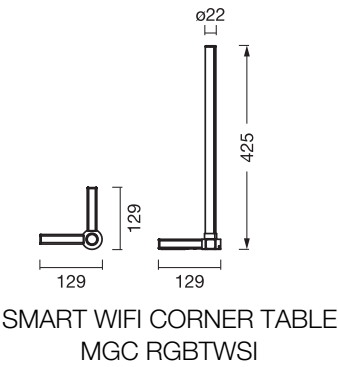

Materials & Colors

|  |          |
|--|----------|
| Product color                              | Silver   |
| Housing color                              | Silver   |
| Body material                              | Aluminum |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C   |

Application & Mounting

|                              |                  |
|------------------------------|------------------|
| Ambient temperature range    | -20...+40 °C     |
| Temperature range at storage | -20...+80 °C     |
| Type of connection           | Plug type C (EU) |
| Type of protection           | IP20             |
| Dimmable                     | Yes              |
| Mounting type                | Surface          |
| Adjustable                   | No               |
| With light source            | Yes              |

Lifespan

|                            |         |
|----------------------------|---------|
| Lifespan L70/B50 at 25 °C  | 30000 h |
| Number of switching cycles | 10000   |

BATTERY

|                            |                              |
|----------------------------|------------------------------|
| Type of Battery            | Li metal button cell battery |
| Battery size [GMS]         | CR2025                       |
| Nominal voltage of battery | 3 V                          |

Certificates & Standards




Standards

CE

### Safety advice

- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.
- Battery Warning: Keep out of reach for children. Swallowing can lead to chemical burns, perforation of soft tissue, and death. Severe burns can occur within 2 hours of ingestion. Seek medical attention immediately.
- If the battery compartment (if applicable) does not close securely, stop using the product and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- Please avoid: Maximal ambient temperature: +35 °C. Replacement of a battery with an incorrect type that can defeat safeguard (for example, in the case of some lithium battery types). Altitude during operation: 2000 m. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

### DOWNLOAD DATA

| Documents and certificates   |  | Document name                           |
|--|--|---|
|    | User instruction / safety instructions | SMART WIFI CORNER TABLE AND FLOOR       |
|    | Declarations of conformity             | CE declaration Smart CORNER TABLE RGBTW |
|  | EU Data Act                            | SMART WiFi Lamps and Luminaires         |

### LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4099854370618 | Folding box<br>1             | 92 mm x 92 mm x 438 mm               | 592.00 g     | 3.71 dm <sup>3</sup>  |
| 4099854370625 | Shipping box<br>4            | 454 mm x 200 mm x 209 mm             | 2806.00 g    | 18.98 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.