

# PRODUCT DATASHEET

## LED Spot Cylinder 1xGU10 Brushed Nickel

LED Spot Cylinder | Surface mounted luminaires with adjustable GU10 spotlights



---

### Areas of application

- Indoor applications

---

### Product benefits

- Timeless design
- Flexible thanks to replaceable LED lamps
- Easy mounting

---

### Product features

- Luminaire family features four versions with up to 4 spot heads
- Housing surface made of brushed nickel
- Adjustable head
- On/off switch on 1-head version for easy operation




TECHNICAL DATA

Electrical data

Nominal voltage	220...240 V
Mains frequency	50/60 Hz
Protection class	I
Operating mode	Mains voltage

Dimensions & Weight

Length	65.00 mm
Width	108.00 mm
Height	106.00 mm
Product weight	155.00 g

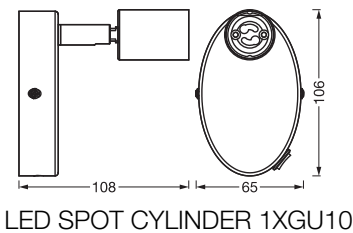

Materials & Colors

Product color	Brushed nickel
Housing color	Brushed nickel
Body material	Steel
Glow Wire Test according to IEC 60695-2-12	650 °C

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Terminal, 3-Pole (L, N, PE)
Type of protection	IP20
Dimmable	No
Mounting type	Surface
Mounting location	Wall

Adjustable	Yes
With light source	No
Replaceable light source	Yes
Holder designation	GU10

### Emergency lighting

Type of emergency operation test	None
----------------------------------	------

### Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No




### Additional product data

Product remark	Maximum bulb wattage: 5 W LED / Available from January 2026
Number of illuminants	1

### Safety advice

- Check wall-ceiling for suitability. If uncertain, seek professional advice.
- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

### DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	LED SPOT CYLINDER G11239548
 Declarations of conformity	LED Spotlights
 Declarations of conformity UKCA	LED Spotlights

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075852761	Folding box 1	87 mm x 137 mm x 92 mm	203.00 g	1.10 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075852778	Shipping box 4	180 mm x 145 mm x 190 mm	921.00 g	4.96 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.