


PRODUCT DATASHEET

LS AY PFM -10/SMB

Connectors for LED Strips Performance Class | Connectors for LED Strips Performance Class

Areas of application

- General indoor illumination

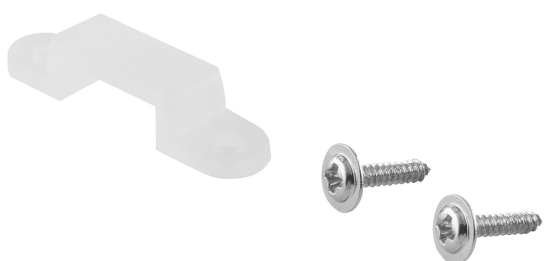

PERFOR-
MANCE
CLASS

Product benefits

- Easy installation of connector, no manual wiring required
- Tool-free installation

TECHNICAL DATA

Dimensions & Weight

| | |
|----------------|---------|
| Length | 27.5 mm |
| Width | 6.0 mm |
| Height | 5.2 mm |
| Product weight | 0.3 g |

Colors & materials

| | |
|---------------|-------------|
| Product color | Transparent |
|---------------|-------------|

Temperatures & operating conditions

| | |
|--------------------------------|--------------|
| Ambient temperature range | -15...+45 °C |
| Temperature range in operation | -15...+45 °C |

LOGISTICAL DATA

| | |
|------------------------------|--------------|
| Temperature range at storage | -35...+85 °C |
|------------------------------|--------------|

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075275676 | Folding box 2 | 80 mm x 120 mm x 5 mm | 1.60 g | 0.05 dm ³ |
| 4058075275683 | Shipping box 100 | 120 mm x 100 mm x 120 mm | 128.00 g | 1.44 dm ³ |
| 4058075275690 | Shipping box 1,000 | 525 mm x 140 mm x 270 mm | 1671.00 g | 19.85 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.