


# PRODUCT DATASHEET

## PANEL VAL 600 36 W 3000 K WT DALI

PANEL VALUE 600 | Square recessed panel luminaires, 600 x 600 mm

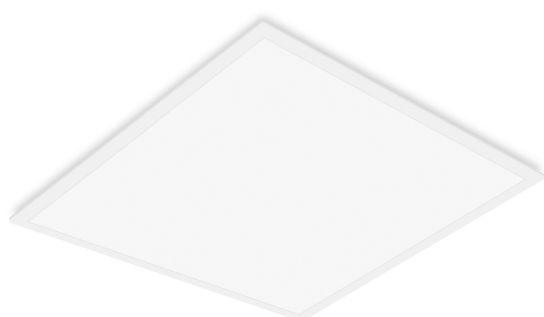

### Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, conference rooms
- Reception areas, foyers, corridors, elevators
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

### Product benefits

- Value for money luminaire
- Low flicker light thanks to special electronic control gear
- Energy savings thanks to system efficacy of up to 100 lm/W
- External driver for extended flexibility and easy installation
- Versions with DALI ECG available

### Product features

- Lifetime (L70/B50) up to 50,000 h (at 25 °C)
- Extruded aluminum frame
- Polystyrene diffuser




---

**TECHNICAL DATA****Electrical data**


|                                                             |                     |
|-------------------------------------------------------------|---------------------|
| Nominal wattage                                             | 36.00 W             |
| Nominal voltage                                             | 220...240 V         |
| Mains frequency                                             | 0/50/60 Hz          |
| Nominal current                                             | 178.000 mA          |
| Inrush current                                              | 10.4 A              |
| Inrush current time $T_{h50}$                               | 200 $\mu$ s         |
| Max. number of luminaires per miniature circuit breaker B16 | 23                  |
| Max. number of luminaires per miniature circuit breaker C10 | 23                  |
| Max. number of luminaires per miniature circuit breaker C16 | 38                  |
| Power factor $\lambda$                                      | > 0.90              |
| Total harmonic distortion                                   | < 15 %              |
| Protection class                                            | II                  |
| Operating mode                                              | External LED driver |
| Dimming interface                                           | DALI-2              |

**Photometrical data**

|                                              |                    |
|----------------------------------------------|--------------------|
| Luminous flux                                | 3600 lm            |
| Luminous efficacy                            | 100 lm/W           |
| Color temperature                            | 3000 K             |
| Light color (designation)                    | Warm White         |
| Color rendering index Ra                     | > 80               |
| Standard deviation of color matching         | 5 sdc <sub>m</sub> |
| Luminous intensity                           | -                  |
| Low flicker                                  | Yes                |
| Flickering metric (Pst LM)                   | -                  |
| Stroboscope effect metric (SVM)              | -                  |
| Photobiological safety group acc. to EN62778 | RG0                |
| Beam angle                                   | 120 °              |

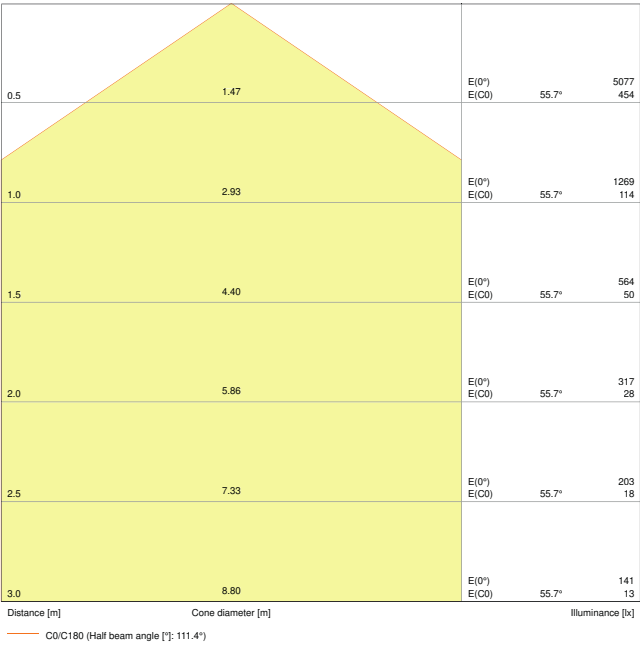


PL VAL DALI 600 36W 3000K

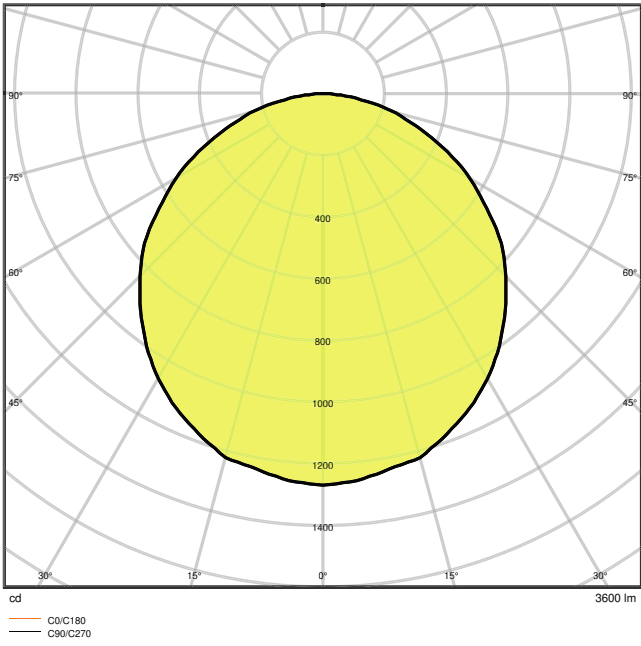

PL VAL DALI 600 36W 3000K

Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 595.00 mm |
| Width          | 595.00 mm |
| Height         | 35.00 mm  |
| Product weight | 1800.00 g |

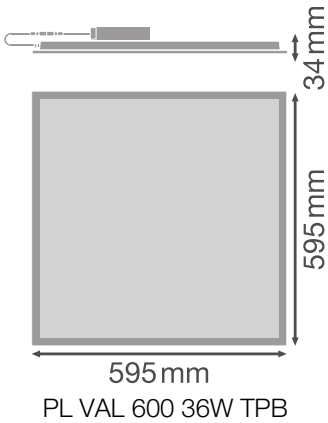

Materials & Colors

|                                            |                  |
|--------------------------------------------|------------------|
| Product color                              | White            |
| Housing color                              | White            |
| Body material                              | Steel            |
| Cover material                             | Polystyrene (PS) |
| Light emitting surface material            | Polystyrene      |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C           |
| Mercury content                            | 0.0 mg           |

### Application & Mounting

|                                        |                            |
|----------------------------------------|----------------------------|
| Ambient temperature range              | -10...+45 °C               |
| Type of connection                     | Screwless terminal         |
| Type of protection                     | IP40                       |
| Protection class IK (shock resistance) | IK02                       |
| Dimmable                               | Yes                        |
| Type of dimming                        | DALI                       |
| Mounting type                          | Recessed/Suspended/Surface |
| Mounting location                      | Ceiling / Wall             |
| Application environment                | Indoor                     |
| Mounting length                        | 580 mm                     |
| Mounting width                         | 580 mm                     |
| Mounting depth                         | 50,0 mm                    |
| Replaceable light source               | No                         |

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 50000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 50000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 50000 h               |
| Lifespan L90/B10 at 25 °C  | 30000 h               |
| Number of switching cycles | 25000                 |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Certificates & Standards

|                                                      |                 |
|------------------------------------------------------|-----------------|
| Standards                                            | CE / CB / EAC   |
| Luminaire with limited surface temperature, "D sign" | No              |
| Ball shot safe                                       | No              |
| Replaceable light source (EPREL)                     | Not replaceable |

## Accessories Optional

| Product image                                                                       | Product name                        | EAN           |
|-------------------------------------------------------------------------------------|-------------------------------------|---------------|
|    | EM CONVERSION BOX                   | 4058075237025 |
|    | PANEL Suspension Kit                | 4058075402928 |
|    | PANEL 600 SURFACE MOUNT KIT H70 VAL | 4058075402843 |
|    | CONNECTOR BOX 5POLE L/N/PE/D+/D- 4x | 4058075473034 |
|    | PANEL SECURITY KIT 4x               | 4058075472990 |
|  | PANEL 600 SURFACE MOUNT KIT H75     | 4058075472914 |
|   | PANEL 600 RECESSED MOUNT FRAME      | 4058075402881 |
|  | PANEL RECESSED MOUNT CLIPS VAL 4x   | 4058075409859 |

## DOWNLOAD DATA

| Documents and certificates                                                             | Document name                                                 |
|----------------------------------------------------------------------------------------|---------------------------------------------------------------|
|  PDF | User instruction / safety instructions<br>PL VAL DALI 600 625 |




| Documents and certificates                                                          |                                     | Document name                          |
|-------------------------------------------------------------------------------------|-------------------------------------|----------------------------------------|
|    | Legal information                   | LSI PL VAL AND PL VAL DALI             |
|    | Legal information                   | LSI PL VAL AND PL VAL DALI             |
|    | Declarations of conformity          | PL VAL DALI                            |
| Photometric and lighting design files                                               |                                     | Document name                          |
|    | IES file (IES)                      | PL VAL DALI 600 36W 3000K              |
|    | LDT file (Eulumdat)                 | PL VAL DALI 600 36W3000K               |
|    | ULD file (DIALux)                   | PL VAL DALI 600 36W-3000K              |
|    | ROLF file (RELUX)                   | PL VAL DALI 600                        |
|   | UGR file (UGR table)                | PL VAL DALI 600 36W 3000K              |
|  | Light distribution curve type cone  | PL VAL DALI 600 36W 3000K              |
|  | Light distribution curve type polar | PL VAL DALI 600 36W 3000K              |
| Tender texts                                                                        |                                     | Document name                          |
|  | Tender documents                    | PANEL VALUE 600 36 W 3000 K WT DALI-EN |

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075392441 | Folding box<br>1             | 602 mm x 40 mm x 648 mm              | 2192.00 g    | 15.60 dm <sup>3</sup> |
| 4058075392458 | Shipping box<br>4            | 667 mm x 182 mm x 634 mm             | 10015.00 g   | 76.96 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

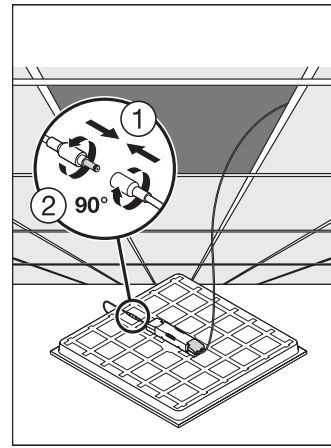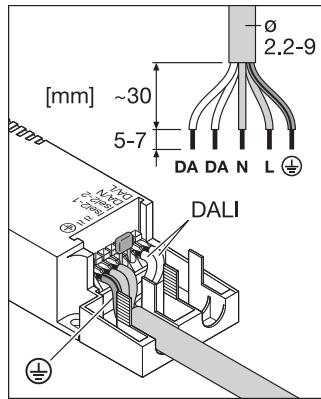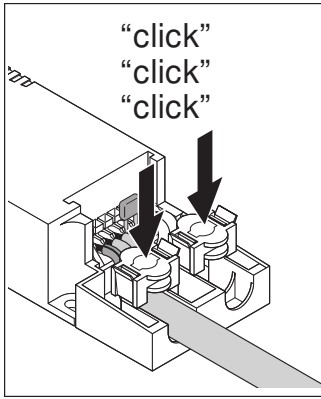

### References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.