

PRODUCT DATASHEET

PANEL 600 SURFACE MOUNT KIT H50

SURFACE MOUNT KIT | Reinforced surface mount frames for panel luminaires



Areas of application

- H75 versions suitable for all LEDVANCE Panels
- H50 versions suitable only for LEDVANCE Biolux Panel and Panel Protect

Product benefits

- Ready-to-mount thanks pre-assembled magnetic corners
- Crossbar for advanced stability
- H50 version with slim design fits for panels with an overall height of 38 mm (Panel + driver)

Product features


- Extruded aluminum frame
- Mount frames available in 75 mm (H75) or 50 mm (H50) height
- Available in white (like RAL9003) or black (like RAL9005) color



TECHNICAL DATA

Dimensions & Weight

Length	600 mm
Width	600.00 mm
Height	50.00 mm
Product weight	1175.00 g

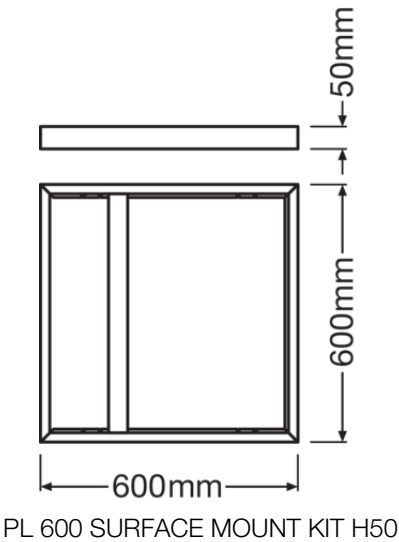



Materials & Colors

Product color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum

Application & Mounting

Ambient temperature range	-20...+50 °C
Mounting type	Surface
Mounting location	Ceiling
Replaceable light source	No

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	UI PL PROT 600 P 36W and PL PROT 625 P 36W
Tender texts		Document name
	Tender documents	SURFACE MOUNT KIT 600 SURFACE MOUNT KIT H50-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075826397	Folding box 1	58 mm x 609 mm x 611 mm	1605.00 g	21.58 dm ³
4099854120756	Shipping box 5	627 mm x 314 mm x 640 mm	9449.00 g	126.00 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.