


PRODUCT DATASHEET

ECO PANEL 600 UGR < 19 36 W/6500 K

ECO CLASS PANEL 600 UGR < 19 | Square recessed panel luminaires with low glare, 600x600 mm

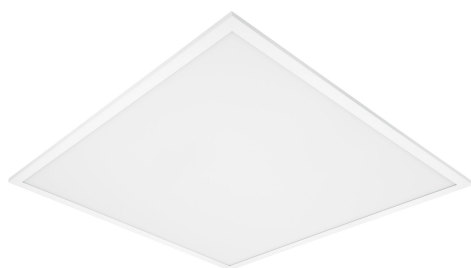

Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Corridors
- Offices
- Conference rooms
- Foyers
- Reception areas
- Elevators
- Suitable for recessed ceiling systems with grid size of 600 x 600 mm

Product benefits

- Good glare reduction (UGR < 19)
- Low flicker light thanks to special electronic control gear
- Energy savings thanks to system efficacy of up to 90 lm/W
- Fast ceiling integration thanks to easy installation system

Product features

- Lifetime (L70/B50) up to 50,000 h (at 25 °C)
- Extruded aluminum housing
- Polystyrene diffuser




TECHNICAL DATA

Electrical data


Nominal wattage	36.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	750.000 mA
Max. number of luminaires per miniature circuit breaker B16	19
Max. number of luminaires per miniature circuit breaker C10	19
Max. number of luminaires per miniature circuit breaker C16	30
Power factor λ	0.95
Total harmonic distortion	< 15 %
Protection class	II
Operating mode	External LED driver

Photometrical data

Luminous flux	3240 lm
Luminous efficacy	90 lm/W
Color temperature	6500 K
Light color (designation)	Cool Daylight
Color rendering index Ra	80
Standard deviation of color matching	6 sdcn
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 °
UGR	< 19

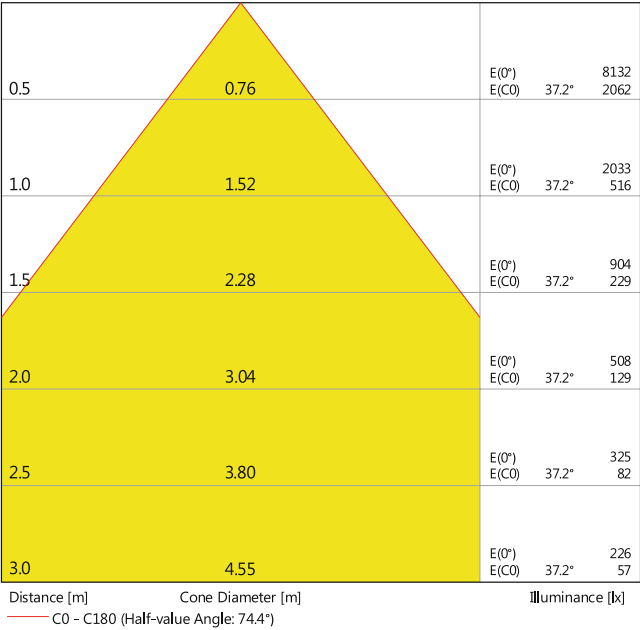

ECO CLASS PANEL 600 36W UGR19

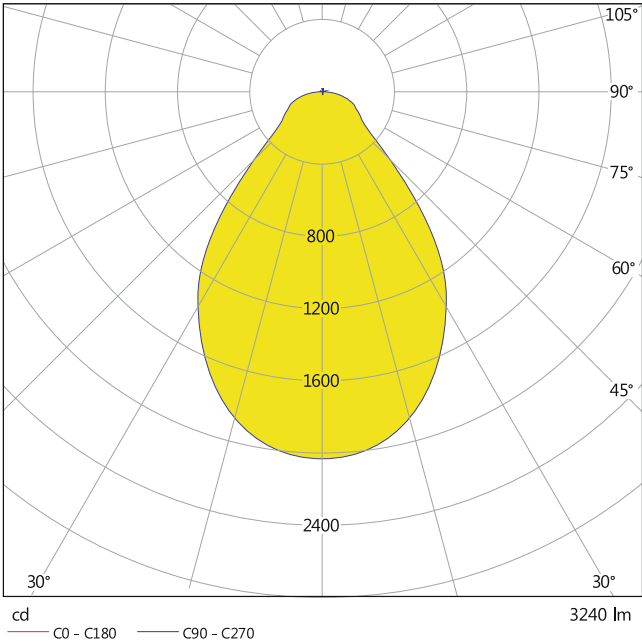

ECO CLASS PANEL 600 36W UGR19

Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	34.00 mm
Product weight	1800.00 g

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polystyrene (PS)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+45 °C
Type of connection	Push button terminal, 2-pole
Type of protection	IP40
Protection class IK (shock resistance)	IK02

Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling / Wall
Application environment	Indoor
Mounting length	580 mm
Mounting width	580 mm
Mounting depth	50,0 mm
With light source	No
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
---------------------------	-----------------------

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

Standards	CE / EAC / REACH / RoHS
Replaceable light source (EPREL)	Not replaceable

Additional product data

Number of illuminants	2
-----------------------	---

EQUIPMENT / ACCESSORIES

– Accessories for several mounting options available

DOWNLOAD DATA

Documents and certificates		Document name
	Legal information	Informationstext 18 Abs 4 ElektroG
Photometric and lighting design files		Document name
	IES file (IES)	ECO CLASS PANEL 600 36W 865 UGR19
	LDT file (Eulumdat)	ECO CLASS PANEL 600 36W 865 UGR19
	UGR file (UGR table)	ECO CLASS PANEL 600 36W UGR19

Photometric and lighting design files		Document name
	Light distribution curve type cone	ECO CLASS PANEL 600 36W UGR19
	Light distribution curve type polar	ECO CLASS PANEL 600 36W UGR19

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075386723	Folding box 1	602 mm x 40 mm x 647 mm	2335.00 g	15.58 dm³
4058075386730	Shipping box 4	667 mm x 182 mm x 627 mm	10165.00 g	76.11 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.