

PRODUCT DATASHEET

LN INDV D/I S 1500 56 W 3000 K DALI

LINEAR IndiviLED® DIRECT/INDIRECT DALI SENSOR | DALI-Pendant luminaire for single luminaire or light line application with sensor function



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, schools
- General indoor illumination
- Corridors, entrance areas
- Seamless linear lighting
- Shop lighting

Product benefits

- Homogenous light distribution and reduced glare thanks to the IndiviLED® optics
- Advanced functionality due to already included DALI driver
- Low flicker light thanks to special electronic control gear
- Increased light comfort thanks to direct and indirect light emission
- Energy savings of up to 50 % compared to T5 batten luminaires
- Robust structure with IK06
- 5 years guarantee

Product features

- Each LED with individual lens and reflector for UGR < 16 and homogenous light distribution
- Motion sensor and ambient light dependend dimming function for maximized energy savings
- Pre-configured DALI driver included
- Pendant mounting with suspension kit
- Linkable to an esthetic seamless light line with line connection adapter (surface or pendant mounting)




- Available with length of 1200 or 1500 mm
- Luminous flux up to 6550 lm
- Luminous efficacy: up to 120 lm/W
- Initial color consistency: < 4 SDCM
- Glow Wire Test according to IEC 60695-2-12: 850 °C

TECHNICAL DATA**Electrical data**


Nominal wattage	56.00 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	320 mA
Inrush current	35.0 A
Inrush current time T_{h50}	400 μ s
Max. number of luminaires per miniature circuit breaker B16	15
Max. number of luminaires per miniature circuit breaker C10	15
Max. number of luminaires per miniature circuit breaker C16	25
Power factor λ	> 0.90
Total harmonic distortion	$\leq$ 18 %
Protection class	I
Operating mode	Integrated LED driver
Dimming interface	DALI

Photometrical data

Luminous flux	6150 lm
Luminous efficacy	110 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	$\geq$ 80
Standard deviation of color matching	3 sdc _m
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0
Beam angle	70 °
UGR	< 16

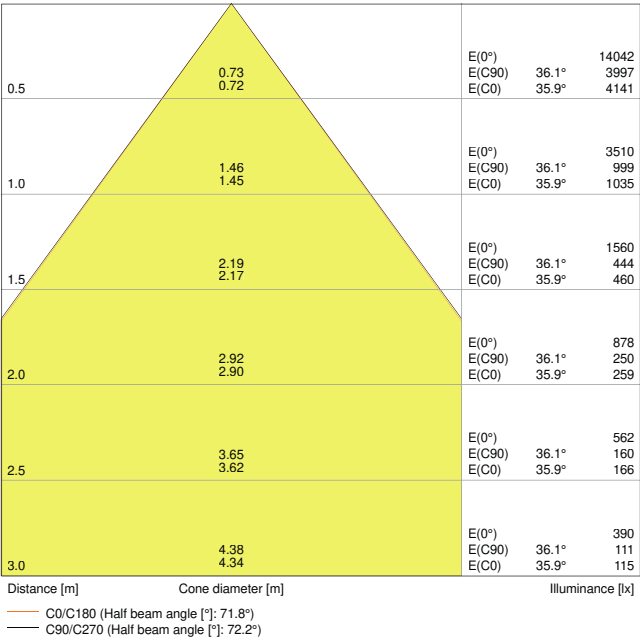


LN INDV DI DALI 1500 56W 3000K S

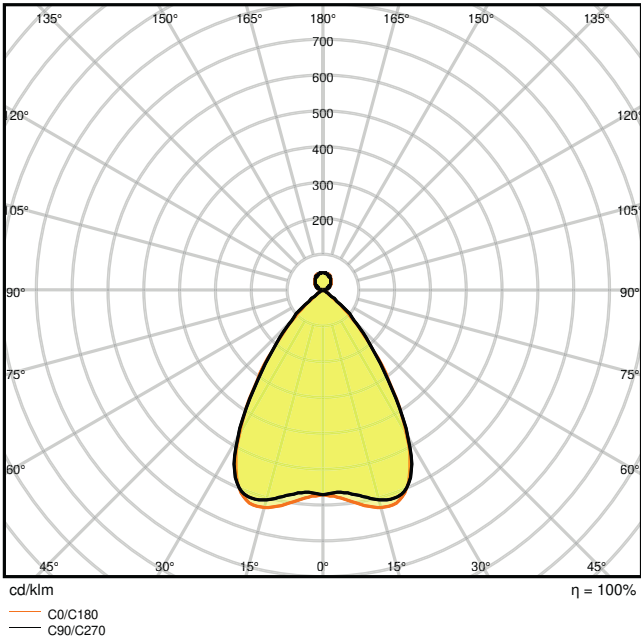

LN INDV DI DALI 1500 56W 3000K S

Dimensions & Weight

Length	1518.00 mm
Width	120.00 mm
Height	40.00 mm
Product weight	3600.00 g

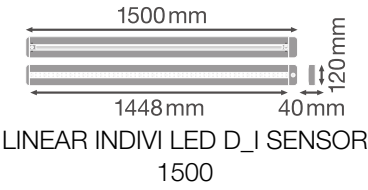

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Aluminum

Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+45 °C
Type of connection	Screwless terminal, 5-Pole
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	DALI
Mounting type	Suspended
Mounting location	Ceiling
Application environment	Indoor
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	60000 h ¹⁾
Lifespan L80/B10 at 25 °C	50000 h ¹⁾
Lifespan L80/B50 at 25 °C	50000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Sensor

Type of sensor	Motion / Light
Sensor technology	Microwave
Sensor detection angle	110 °
Sensor controlled switching time	5 s/1 min/3 min/10 min
Detection range of motion sensor	8 m
Detection threshold of daylight sensor	25 lx
Sensor IP rating	IP20

Certificates & Standards

Standards	CE / CB / TÜV SÜD / EAC / RoHS
Ball shot safe	No

Replaceable light source (EPREL)

Not replaceable

EQUIPMENT / ACCESSORIES

- Ceiling connection box available
- Suspension kit available
- Line connection adapter available
- Through-wiring cable kit available

DOWNLOAD DATA




Documents and certificates		Document name
	User instruction / safety instructions	User Instruction Linear IndiviLED DALI Sensor
	On-Pack-Info	Legal Insert Linear LED DALI INDV D/I
	Declarations of conformity	EU Declaration of Conformity Linear IndiviLED DALI sensor LEDVANCE
Photometric and lighting design files		Document name
	IES file (IES)	LN INDV DI DALI 1500 56W 3000K S
	LDT file (Eulumdat)	LN INDV DI DALI 1500 56W 3000K S
	ULD file (DIALux)	LINEARIndiviLEDDIRECTINDIRECTDALISENSOR150056W3000KS
	UGR file (UGR table)	LN INDV DI DALI 1500 56W 3000K S
	Light distribution curve type cone	LN INDV DI DALI 1500 56W 3000K S
	Light distribution curve type polar	LN INDV DI DALI 1500 56W 3000K S

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075110083	Folding box 1	132 mm x 1,624 mm x 52 mm	3942.00 g	11.15 dm ³
4058075110090	Shipping box 4	1,641 mm x 207 mm x 169 mm	16898.00 g	57.41 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.