


PRODUCT DATASHEET

VALUE CEILING 10 W 3000 K GEN3

LED VALUE CEILING | Wall and ceiling luminaires

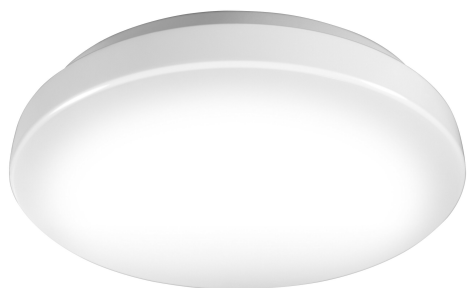

Areas of application

- Corridors
- Entrances / Hallways

Product benefits

- Direct connection to AC power supply thanks to integrated control gear
- Long lifetime thanks to LED technology
- Mercury-free technology
- Uniform room illumination

Product features

- Beam angle: 120°
- Color rendering index $R_a \geq 80$
- Available with color temperature: 3,000 K, 4,000 K, 6,500 K



TECHNICAL DATA

Electrical data

| | |
|------------------------|-----------------------|
| Nominal wattage | 10.00 W |
| Nominal voltage | 220...240 V |
| Mains frequency | 50...60 Hz |
| Nominal current | 110.000 mA |
| Power factor λ | > 0.5 |
| Protection class | I |
| Operating mode | Integrated LED driver |

Photometrical data

| | |
|--------------------------------------|---------------------------|
| Luminous flux | 760 lm |
| Luminous efficacy | 76 lm/W |
| Color temperature | 3000 K |
| Light color (designation) | Warm White |
| Color rendering index Ra | ≥ 80 |
| Standard deviation of color matching | ≤ 6 sdc _m |
| Beam angle | 120 ° |

Dimensions & Weight

| | |
|----------------|-----------|
| Diameter | 255.00 mm |
| Height | 73.00 mm |
| Product weight | 358.00 g |



LEDVAL CEILING 10W Gen3

Materials & Colors

| | |
|----------------|-------------------------------|
| Product color | White |
| Housing color | White |
| Body material | Polymethylmethacrylate (PMMA) |
| Cover material | Polymethylmethacrylate (PMMA) |

| | |
|-----------------|--------|
| Mercury content | 0.0 mg |
|-----------------|--------|

Application & Mounting


| | |
|------------------------------|------------------------|
| Ambient temperature range | -20...+40 °C |
| Temperature range at storage | -20...+70 °C |
| Type of connection | Plug, quick disconnect |
| Type of protection | IP20 |
| Dimmable | No |
| Mounting type | Surface |
| Mounting location | Ceiling |
| Application environment | Indoor |
| Replaceable light source | No |

Lifespan

| | |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C | 15000 h ¹⁾ |
| Number of switching cycles | 30000 |

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

DOWNLOAD DATA

| Photometric and lighting design files | | Document name |
|--|----------------|------------------------------------|
|  | IES file (IES) | Ceiling10-20W SP_10W 3000K IP20_44 |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075310100 | Folding box 1 | 277 mm x 82 mm x 278 mm | 519.00 g | 6.31 dm ³ |
| 4058075310117 | Shipping box 5 | 426 mm x 292 mm x 305 mm | 3293.00 g | 37.94 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.