


PRODUCT DATASHEET

Spot Set Adj Simple Dim 3 x 5W 2700K Gray

LED SPOT SET RECESS SIMPLE DIM | Recessed spotlight with stepless dimming function via wall switch

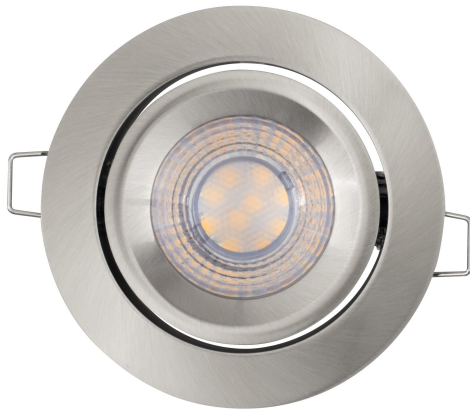

Areas of application

- Indoor applications
- Corridors, entrance areas, stairwells, living rooms, basements
- Suspended ceilings

Product benefits

- WAGO Fast-Connector-Terminal for easy and safe installation
- Timeless design
- Easy mounting
- Connection of up to 10 luminaires in a row

Product features

- With integrated LED module and driver
- Low mounting depth
- Set of 3 luminaires
- Adjustable head
- Housing material: aluminum



TECHNICAL DATA

Electrical data


Nominal wattage	5.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Power factor λ	> 0.5
Protection class	II
Operating mode	Mains voltage

Photometrical data

Luminous flux	400 lm
Luminous efficacy	80 lm/W
Color temperature	2700 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	6 sdcm
Beam angle	40 °

Dimensions & Weight

Diameter	87.00 mm
Height	30.00 mm
Product weight	100.00 g

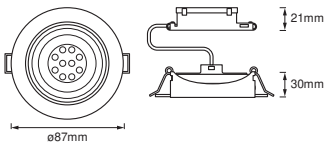

SPOT SET SIMPLE DIM WT/GY

Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Aluminum
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Screw terminal
Type of protection	IP20
Dimmable	Yes
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting diameter	68.00 mm
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	25000 h ¹⁾
Number of switching cycles	100000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

Standards	CE / EAC / REACH / RoHS
Luminaire with limited surface temperature, "D sign"	No
Replaceable light source (EPREL)	Not replaceable


EQUIPMENT / ACCESSORIES



- Complete mounting and connecting accessories included

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	SPOT SET ADJ SIMPLEDIM

Documents and certificates		Document name
	Legal information	Legal insert A - Not dimmable
	Declarations of conformity	CE Declaration Spot Set adj Simple DIM

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075273146	Folding box 3	47 mm x 102 mm x 323 mm	435.00 g	1.55 dm³
4058075273153	Shipping box 24	215 mm x 200 mm x 330 mm	3650.00 g	14.19 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.