


# DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

## BASIC INFORMATION:

### 1. WHAT IS THE PRODUCT CODE AND WHERE DO I FIND IT?

The product code describes the lamp type. It contains 7 letters and digits and is starting with "A". Below an example for the product code of the stamp of the lamp:

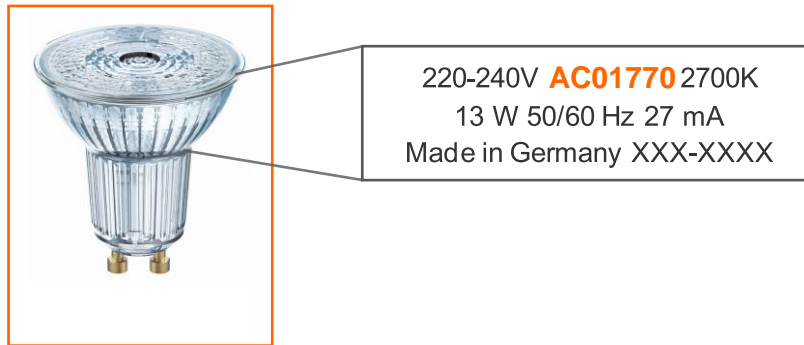

### 2. HOW CAN I READ THE FOLLOWING CHARTS?

**Legend:**  
Information about the dimmability of the lamps. Green means good dimmability, yellow means limited dimmability, red means undesired dimmability etc.

List of dimmers tested in laboratory conditions


Legend						SUPERSTAR PAR16 35 36*		SUPERSTAR PAR16 50 36*		SUPERSTAR PAR16 80 36*		SUPERSTAR PAR16 80 120*																																																																																																																																																																																														
Good dimmability with indicated number of lamps (dimming range greater than 75%)																																																																																																																																																																																																										
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																																																																																																																																																																																																										
Undesired dimmability																																																																																																																																																																																																										
Not tested																																																																																																																																																																																																										
<table border="1"> <thead> <tr> <th>Brand</th> <th>Model</th> <th>Voltage range</th> <th>Power</th> <th>Type</th> </tr> </thead> <tbody> <tr><td>ABB</td><td>STD 50-3</td><td>230/50Hz</td><td>60-500</td><td>L</td></tr> <tr><td>Altenburger</td><td>50_3</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>AURORA</td><td>DSP 400</td><td>230/50Hz</td><td>400</td><td>L</td></tr> <tr><td>Berker</td><td>2861</td><td>230/50Hz</td><td>50-420</td><td>U</td></tr> <tr><td>Bticino</td><td>L/N/NT4411N</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>Busch-Jaeger</td><td>6513 U-102</td><td>230/50Hz</td><td>420</td><td>T</td></tr> <tr><td>Busch-Jaeger</td><td>6523 U-102</td><td>230/50Hz</td><td>40-420</td><td>T</td></tr> <tr><td>Busch-Jaeger</td><td>6526 U</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>CENTURY CONTROL</td><td>MULTI DIMMER</td><td>230/50Hz</td><td>60-600</td><td>U</td></tr> <tr><td>Domintell</td><td>DimMax 420 SL</td><td>230/50Hz</td><td>200</td><td>L/T</td></tr> <tr><td>ELKO</td><td>400GL</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>ELKO</td><td>315GLE</td><td>230/50Hz</td><td>20-315</td><td>T</td></tr> <tr><td>ELKO</td><td>600GLE/I</td><td>230/50Hz</td><td></td><td></td></tr> <tr><td>ELKO</td><td>600GL</td><td>230/50Hz</td><td>40-600</td><td>U</td></tr> </tbody> </table>						Brand	Model	Voltage range	Power	Type	ABB	STD 50-3	230/50Hz	60-500	L	Altenburger	50_3	230/50Hz			AURORA	DSP 400	230/50Hz	400	L	Berker	2861	230/50Hz	50-420	U	Bticino	L/N/NT4411N	230/50Hz			Busch-Jaeger	6513 U-102	230/50Hz	420	T	Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	Busch-Jaeger	6526 U	230/50Hz			CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	Domintell	DimMax 420 SL	230/50Hz	200	L/T	ELKO	400GL	230/50Hz			ELKO	315GLE	230/50Hz	20-315	T	ELKO	600GLE/I	230/50Hz			ELKO	600GL	230/50Hz	40-600	U	 EAN/Basic Code 4058075433676 / AC16509 4052899390133 / AC16509 4058075458086 / AC16509 4058075433690 / AC16511 4052899390157 / AC16511		 EAN/Basic Code 405807512544 / AC16512 4052899390171 / AC16512 4052899390195 / AC16514 4058075433713 / AC16514		 EAN/Basic Code 4058075433663 / AC24603 4058075433564 / AC24603 4058075453661 / AC24605 4058075433540 / AC24605		 EAN/Basic Code 4058075433687 / AC24609 4058075433526 / AC24609 4058075433700 / AC24611 4058075433602 / AC24611																																																																																																																			
Brand	Model	Voltage range	Power	Type																																																																																																																																																																																																						
ABB	STD 50-3	230/50Hz	60-500	L																																																																																																																																																																																																						
Altenburger	50_3	230/50Hz																																																																																																																																																																																																								
AURORA	DSP 400	230/50Hz	400	L																																																																																																																																																																																																						
Berker	2861	230/50Hz	50-420	U																																																																																																																																																																																																						
Bticino	L/N/NT4411N	230/50Hz																																																																																																																																																																																																								
Busch-Jaeger	6513 U-102	230/50Hz	420	T																																																																																																																																																																																																						
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T																																																																																																																																																																																																						
Busch-Jaeger	6526 U	230/50Hz																																																																																																																																																																																																								
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U																																																																																																																																																																																																						
Domintell	DimMax 420 SL	230/50Hz	200	L/T																																																																																																																																																																																																						
ELKO	400GL	230/50Hz																																																																																																																																																																																																								
ELKO	315GLE	230/50Hz	20-315	T																																																																																																																																																																																																						
ELKO	600GLE/I	230/50Hz																																																																																																																																																																																																								
ELKO	600GL	230/50Hz	40-600	U																																																																																																																																																																																																						
<table border="1"> <thead> <tr> <th>Brand</th> <th>Model</th> <th>Voltage range</th> <th>Power</th> <th>Type</th> <th>Number of Lamps</th> <th>Dimming range</th> <th>Number of Lamps</th> <th>Dimming range</th> <th>Number of Lamps</th> <th>Dimming range</th> <th>Number of Lamps</th> <th>Dimming range</th> </tr> </thead> <tbody> <tr><td>ABB</td><td>STD 50-3</td><td>230/50Hz</td><td>60-500</td><td>L</td><td>1-20</td><td>99-2%</td><td>1-18</td><td>97-1%</td><td>85-0%</td><td>87-0%</td><td>85-0%</td><td>87-0%</td></tr> <tr><td>Altenburger</td><td>50_3</td><td>230/50Hz</td><td></td><td></td><td>1-3</td><td>99-0%</td><td>1-20</td><td>98-0%</td><td>92-0%</td><td>92-0%</td><td>92-0%</td><td>92-0%</td></tr> <tr><td>AURORA</td><td>DSP 400</td><td>230/50Hz</td><td>400</td><td>L</td><td>1-11</td><td>99-0%</td><td>1-10</td><td>95-0%</td><td>89-0%</td><td>89-0%</td><td>89-0%</td><td>89-0%</td></tr> <tr><td>Berker</td><td>2861</td><td>230/50Hz</td><td>50-420</td><td>U</td><td>1-10</td><td>99-0%</td><td>1-20</td><td>97-0%</td><td>88-0%</td><td>88-0%</td><td>88-0%</td><td>88-0%</td></tr> <tr><td>Bticino</td><td>L/N/NT4411N</td><td>230/50Hz</td><td></td><td></td><td>1-9</td><td>100-0%</td><td>1-14</td><td>97-0%</td><td>93-0%</td><td>92-0%</td><td>93-0%</td><td>92-0%</td></tr> <tr><td>Busch-Jaeger</td><td>6513 U-102</td><td>230/50Hz</td><td>420</td><td>T</td><td>1-20</td><td>100-0%</td><td>1-20</td><td>97-3%</td><td></td><td></td><td></td><td></td></tr> <tr><td>Busch-Jaeger</td><td>6523 U-102</td><td>230/50Hz</td><td>40-420</td><td>T</td><td>1-4</td><td>100-9%</td><td>1-7</td><td>97-6%</td><td>94-3%</td><td>93-3%</td><td>94-3%</td><td>93-3%</td></tr> <tr><td>Busch-Jaeger</td><td>6526 U</td><td>230/50Hz</td><td></td><td></td><td>1-20</td><td>99-20%</td><td>1-16</td><td>98-24%</td><td></td><td></td><td></td><td></td></tr> <tr><td>CENTURY CONTROL</td><td>MULTI DIMMER</td><td>230/50Hz</td><td>60-600</td><td>U</td><td>1-4</td><td>99-0%</td><td>1-9</td><td>97-0%</td><td>90-0%</td><td>90-0%</td><td>90-0%</td><td>90-0%</td></tr> <tr><td>Domintell</td><td>DimMax 420 SL</td><td>230/50Hz</td><td>200</td><td>L/T</td><td>1-16</td><td>100-0%</td><td>1-13</td><td>97-0%</td><td>92-0%</td><td>91-0%</td><td>92-0%</td><td>91-0%</td></tr> <tr><td>ELKO</td><td>400GL</td><td>230/50Hz</td><td></td><td></td><td>1-11</td><td>100-0%</td><td>1-12</td><td>97-0%</td><td>92-3%</td><td>90-0%</td><td>92-3%</td><td>90-0%</td></tr> <tr><td>ELKO</td><td>315GLE</td><td>230/50Hz</td><td>20-315</td><td>T</td><td>1-20</td><td>100-0%</td><td>1-20</td><td>98-0%</td><td>91-3%</td><td>90-0%</td><td>91-3%</td><td>90-0%</td></tr> <tr><td>ELKO</td><td>600GLE/I</td><td>230/50Hz</td><td></td><td></td><td>1-11</td><td>99-1%</td><td>1-13</td><td>98-5%</td><td>91-0%</td><td>91-0%</td><td>91-0%</td><td>91-0%</td></tr> <tr><td>ELKO</td><td>600GL</td><td>230/50Hz</td><td>40-600</td><td>U</td><td>1-20</td><td>99-0%</td><td>1-20</td><td>98-0%</td><td>91-2%</td><td>91-2%</td><td>91-2%</td><td>91-2%</td></tr> </tbody> </table>						Brand	Model	Voltage range	Power	Type	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	ABB	STD 50-3	230/50Hz	60-500	L	1-20	99-2%	1-18	97-1%	85-0%	87-0%	85-0%	87-0%	Altenburger	50_3	230/50Hz			1-3	99-0%	1-20	98-0%	92-0%	92-0%	92-0%	92-0%	AURORA	DSP 400	230/50Hz	400	L	1-11	99-0%	1-10	95-0%	89-0%	89-0%	89-0%	89-0%	Berker	2861	230/50Hz	50-420	U	1-10	99-0%	1-20	97-0%	88-0%	88-0%	88-0%	88-0%	Bticino	L/N/NT4411N	230/50Hz			1-9	100-0%	1-14	97-0%	93-0%	92-0%	93-0%	92-0%	Busch-Jaeger	6513 U-102	230/50Hz	420	T	1-20	100-0%	1-20	97-3%					Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	1-4	100-9%	1-7	97-6%	94-3%	93-3%	94-3%	93-3%	Busch-Jaeger	6526 U	230/50Hz			1-20	99-20%	1-16	98-24%					CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	1-4	99-0%	1-9	97-0%	90-0%	90-0%	90-0%	90-0%	Domintell	DimMax 420 SL	230/50Hz	200	L/T	1-16	100-0%	1-13	97-0%	92-0%	91-0%	92-0%	91-0%	ELKO	400GL	230/50Hz			1-11	100-0%	1-12	97-0%	92-3%	90-0%	92-3%	90-0%	ELKO	315GLE	230/50Hz	20-315	T	1-20	100-0%	1-20	98-0%	91-3%	90-0%	91-3%	90-0%	ELKO	600GLE/I	230/50Hz			1-11	99-1%	1-13	98-5%	91-0%	91-0%	91-0%	91-0%	ELKO	600GL	230/50Hz	40-600	U	1-20	99-0%	1-20	98-0%	91-2%	91-2%	91-2%	91-2%	Information about the lamp type	
Brand	Model	Voltage range	Power	Type	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range	Number of Lamps	Dimming range																																																																																																																																																																																														
ABB	STD 50-3	230/50Hz	60-500	L	1-20	99-2%	1-18	97-1%	85-0%	87-0%	85-0%	87-0%																																																																																																																																																																																														
Altenburger	50_3	230/50Hz			1-3	99-0%	1-20	98-0%	92-0%	92-0%	92-0%	92-0%																																																																																																																																																																																														
AURORA	DSP 400	230/50Hz	400	L	1-11	99-0%	1-10	95-0%	89-0%	89-0%	89-0%	89-0%																																																																																																																																																																																														
Berker	2861	230/50Hz	50-420	U	1-10	99-0%	1-20	97-0%	88-0%	88-0%	88-0%	88-0%																																																																																																																																																																																														
Bticino	L/N/NT4411N	230/50Hz			1-9	100-0%	1-14	97-0%	93-0%	92-0%	93-0%	92-0%																																																																																																																																																																																														
Busch-Jaeger	6513 U-102	230/50Hz	420	T	1-20	100-0%	1-20	97-3%																																																																																																																																																																																																		
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	1-4	100-9%	1-7	97-6%	94-3%	93-3%	94-3%	93-3%																																																																																																																																																																																														
Busch-Jaeger	6526 U	230/50Hz			1-20	99-20%	1-16	98-24%																																																																																																																																																																																																		
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	1-4	99-0%	1-9	97-0%	90-0%	90-0%	90-0%	90-0%																																																																																																																																																																																														
Domintell	DimMax 420 SL	230/50Hz	200	L/T	1-16	100-0%	1-13	97-0%	92-0%	91-0%	92-0%	91-0%																																																																																																																																																																																														
ELKO	400GL	230/50Hz			1-11	100-0%	1-12	97-0%	92-3%	90-0%	92-3%	90-0%																																																																																																																																																																																														
ELKO	315GLE	230/50Hz	20-315	T	1-20	100-0%	1-20	98-0%	91-3%	90-0%	91-3%	90-0%																																																																																																																																																																																														
ELKO	600GLE/I	230/50Hz			1-11	99-1%	1-13	98-5%	91-0%	91-0%	91-0%	91-0%																																																																																																																																																																																														
ELKO	600GL	230/50Hz	40-600	U	1-20	99-0%	1-20	98-0%	91-2%	91-2%	91-2%	91-2%																																																																																																																																																																																														
												Assessment of the results into categories. Includes the number of lamps and the related dimming range																																																																																																																																																																																														

# DIMMER KOMPATIBILITÄT LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

## BASISINFORMATIONEN:

### 1. WAS IST DER PRODUKTCODE UND WO FINDE ICH IHN?

Der Produktcode beschreibt den Lampentyp. Er besteht aus sieben Buchstaben und Ziffern und beginnt mit einem "A". Nachfolgend ein Beispiel eines Produktcodes auf dem Aufdruck der Lampe.

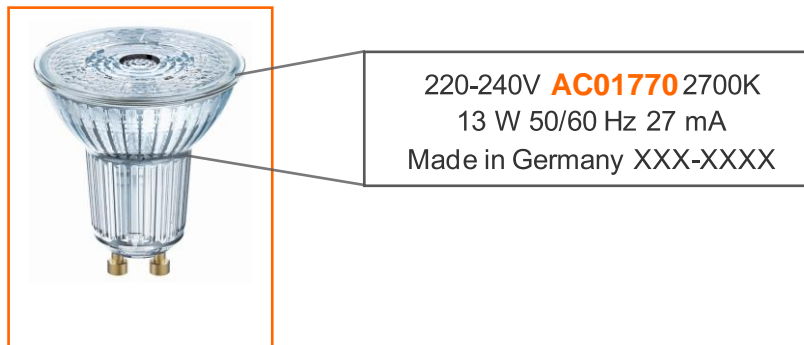

### 2. WIE LESE ICH DIE FOLGENDEN TABELLEN?

Legende: Angaben zur Dimmbarkeit der Lampen. Grün bedeutet eine gute Dimmbarkeit mit der angegebenen Lampenanzahl, gelb bedeutet eine eingeschränkte Dimmbarkeit, rot bedeutet, dass unerwünschtes Dimmverhalten auftreten kann etc.









Liste der getesteten Dimmer

Legend					SUPERSTAR PAR16 35 36°				SUPERSTAR PAR16 50 36°				SUPERSTAR PAR16 80 36°				SUPERSTAR PAR16 80 120°								
Good dimmability with indicated number of lamps (dimming range greater than 75%)																									
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN / Basic Code				EAN / Basic Code				EAN / Basic Code				EAN / Basic Code								
Undesired dimmability					405807543676 / AC16509				4058075112544 / AC16512				4058075433663 / AC24603				4058075433687 / AC24609								
Not tested					4052899390133 / AC16509				4052899390171 / AC16512				4058075433564 / AC24603				4058075433526 / AC24609								
					4058075458086 / AC16509				4052899390195 / AC16514				4058075453661 / AC24605				4058075433700 / AC24611								
					4058075431690 / AC16511				4058075431713 / AC16514				4058075433540 / AC24605				4058075433502 / AC24611								
					4052899390157 / AC16511																				
Dimmer					Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range		Number of Lamps		Dimming range						
Brand	Model	Voltage range	Power	Type	1-20	99-2%	1-18	97-1%	85-0%	87-0%	85-0%	87-0%	1-20	100-0%	1-20	97-3%	94-3%	93-3%	94-3%	93-3%					
ABB	STD 50-3	230/50Hz	60-500	L	1-3	99-0%	1-20	98-0%	92-0%	92-0%	92-0%	92-0%	1-11	99-0%	1-10	95-0%	89-0%	89-0%	89-0%	89-0%					
Altenburger	50.3	230/50Hz		L	1-11	99-0%	1-10	95-0%	89-0%	89-0%	89-0%	89-0%	1-10	99-0%	1-20	97-0%	88-0%	88-0%	88-0%	88-0%					
AURORA	DSP 400	230/50Hz	400	L	1-9	100-0%	1-14	97-0%	93-0%	92-0%	93-0%	92-0%	1-9	100-0%	1-14	97-0%	93-0%	92-0%	93-0%	92-0%					
Berker	2861	230/50Hz	50-420	U	1-20	100-0%	1-20	97-3%	94-3%	93-3%	94-3%	93-3%	1-20	100-0%	1-20	97-3%	94-3%	93-3%	94-3%	93-3%					
Bticino	L/N/NT411N	230/50Hz		U	1-4	100-9%	1-7	97-6%	98-24%	98-24%	98-24%	98-24%	1-4	99-0%	1-9	97-0%	90-0%	90-0%	90-0%	90-0%					
Busch-Jaeger	6513 U-102	230/50Hz	420	T	1-20	99-20%	1-16	97-0%	92-0%	91-0%	92-0%	91-0%	1-20	99-20%	1-16	97-0%	92-0%	91-0%	92-0%	91-0%					
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	1-14	100-0%	1-13	97-0%	92-0%	91-0%	92-0%	91-0%	1-14	100-0%	1-13	97-0%	92-0%	91-0%	92-0%	91-0%					
Busch-Jaeger	6526 U	230/50Hz		U	1-11	100-0%	1-12	97-0%	92-3%	90-0%	92-3%	90-0%	CENTURY CONTROL MULTI DIMMER	230/50Hz	60-600	U	1-1	99-0%	1-9	97-0%	90-0%	90-0%			
					1-16	100-0%	1-13	97-0%	92-0%	91-0%	92-0%	91-0%	Domintell DimMax 420 SL	230/50Hz	200	L/T	1-16	100-0%	1-13	97-0%	92-0%	91-0%	92-0%		
					1-11	100-0%	1-12	97-0%	92-3%	90-0%	92-3%	90-0%	ELKO	400GU	230/50Hz		1-11	100-0%	1-12	97-0%	92-3%	90-0%	92-3%	90-0%	
					1-20	100-0%	1-20	98-0%	91-3%	90-0%	91-3%	90-0%	ELKO	315GLE	230/50Hz	20-315	T	1-20	100-0%	1-20	98-0%	91-3%	90-0%	91-3%	90-0%
					1-11	99-1%	1-13	98-5%	91-0%	91-0%	91-0%	91-0%	ELKO	600GLE/1	230/50Hz		1-11	99-1%	1-13	98-5%	91-0%	91-0%	91-0%	91-0%	
					1-20	99-0%	1-20	98-0%	91-2%	91-2%	91-2%	91-2%	ELKO	600GU	230/50Hz	40-600	U	1-20	99-0%	1-20	98-0%	91-2%	91-2%	91-2%	91-2%

Angaben zum Lampentyp









Bewertung der Testergebnisse im Ampelsystem. Beinhaltet sowohl die Lampenanzahl als auch den dimmbaren Bereich

## DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35









Legend					LINE 78 75	LINE 78 100	LINE 118 125	LINE 118 150	PIN G9 32	PIN G9 40	PIN G4 20	LED PIN DIM GY6.35								
Good dimmability with indicated number of lamps (dimming range greater than 75%)																				
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code							
Undesired dimmability																				
Not tested																				
					4058075811751 / AC11919 4058075432512 / AC11919	4058075138506 / AC11780 4058075432536 / AC11780	4058075811737 / AC11924 4058075432550 / AC11924	4058075271975 / AC18433 4058075432574 / AC18433	4058075811935 / AC02801 4058075431874 / AC02801	4058075271777 / AC17654 4058075432246 / AC17654	4058075271722 / AC17652 4058075431904 / AC17652	4058075432185 / AC24750								
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps				
Brand	Model	Voltage range	Power	Type																
ABB	STD 50-3	230/50Hz	60-500	L	16-96%	18-98%	90-10%	92-24%	26-100%	29-100%	99-10%	99-9%	90-1%	100-0%	99-2%	99-2%	100-0%	67-0%	99-0%	
Altenburger	50,3	230/50Hz			31-99%						99-14%	98-4%	100-14%	98-38%	91-2%	98-0%		100-0%	99-6%	99-23%
AURORA	DSP 400	230/50Hz	400	L	0-97%	0-97%												99-0%	100-0%	60-0%
Berker	2861	230/50Hz	50-420	U	31-98%	29-98%	88-31%	95-31%	40-100%	43-100%	99-18%	99-11%		100-9%	99-0%	99-2%	75-0%	100-9%	99-0%	99-10%
Bticino	L/N/NT4411N	230/50Hz			6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%		100-0%	95-0%	100-0%
Bticino	L/N/NT4408	230/50Hz			0-97%	0-97%							100-4%	91-4%						
Bticino	NT4402N	230/50Hz	500	R							98-3%	99-0%	100-5%	100-5%			98-3%		74-0%	98-32%
Busch-Jaeger	6513 U-102	230/50Hz	420	T	16-99%	9-99%	95-25%	95-21%	27-99%	21-99%	99-19%	99-9%	100-0%	100-0%	98-25%	98-15%		100-21%	99-44%	99-25%
Busch-Jaeger	6523 U-102	230/50Hz	40-420	T	23-99%	25-99%	83-26%	85-28%	9-100%	44-100%	98-5%	100-2%	72-1%	93-1%		76-0%		100-0%	100-0%	99-0%
Busch-Jaeger	2250 U	230/50Hz	60-600	L	13-98%	13-98%		94-17%	15-100%	17-100%					54-0%	80-16%	100-0%	83-0%	99-0%	
Busch-Jaeger	6526 U	230/50Hz			34-99%	33-98%	84-30%	85-30%	42-100%	44-100%	99-5%	98-3%	100-19%	100-16%	99-0%	98-0%	100-0%		99-0%	99-5%
CENTURY CONTROL	MULTI DIMMER	230/50Hz	60-600	U	6-96%	9-97%	91-8%	92-11%	4-100%	6-100%	99-1%	99-0%	90-6%	99-6%		94-0%	99-1%	100-0%	92-0%	99-0%
DimMax	420 SL	230/50Hz	200	L/T							99-0%	100-0%			99-0%	98-0%	89-0%	100-0%	99-0%	99-4%
DINUY	RE EL1 LE1	230/50Hz	400	LED	41-97%	40-97%	95-3%	100-3%	0-100%	3-100%	99-0%	99-0%	100-7%	100-18%	94-0%	94-0%	99-0%	100-0%	99-0%	99-0%
ELKO	400GLI	230/50Hz			0-99%	0-99%			0-100%	0-100%	99-0%	99-0%			86-0%	51-0%	87-0%	61-0%		
ELKO	315GLE	230/50Hz	20-315	T	28-98%	10-98%	92-25%	92-24%	34-99%	32-100%	99-0%	99-0%		100-13%	70-1%	80-0%		100-0%	99-0%	100-13%
ELKO	600GLE/I	230/50Hz			0-98%	0-98%	85-2%	87-4%	0-100%	0-100%	99-14%	99-7%	95-2%	99-2%		83-1%	78-0%	100-16%		
ELKO	600GLi	230/50Hz	40-600	U	14-98%	14-98%	86-17%	88-22%	16-100%	23-100%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		100-0%	99-0%	99-0%
ELKO	420GLE/I	230/50Hz	40-420	U	5-98%	6-98%	84-3%	85-5%	4-100%	3-100%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%		99-10%
ELKO	1000LRI	230/50Hz			0-97%	0-97%	98-0%	98-0%	0-100%	0-100%	100-0%	99-0%	94-9%	94-9%	98-0%	98-0%	100-0%	100-0%	99-0%	99-0%
ELKO	630GLE	230/50Hz	20-630	U	13-99%	11-98%	92-14%	92-13%	17-100%	14-100%	99-14%	99-7%	100-2%	100-4%		83-1%	78-0%	100-16%		
Eitako	EUD61NPN-UC	230/50Hz	5-400	R / L / C	2-97%	3-97%			0-100%	0-100%	99-0%	99-0%	100-2%	100-12%	99-0%	98-0%	99-0%	100-0%		
Feller	40200.LEDxxx	230/50Hz			27-98%	7-98%	90-23%	90-23%	32-100%	29-100%	99-1%	100-0%	100-19%	100-9%		90-0%			99-0%	99-0%
Feller	40600.RLC	230/50Hz	20-600	U	0-98%	0-98%	85-2%	87-4%	0-100%	0-100%	99-1%	100-0%	95-2%	99-2%		90-0%			99-0%	99-0%
Feller	40600.RC	230/50Hz			13-99%	11-98%	92-14%	92-13%	17-100%	14-100%	99-18%	99-11%	100-2%	100-4%	99-0%	99-2%	75-0%	100-9%	98-0%	98-0%
Feller	40600.RL	230/50Hz			14-98%	14-98%	86-17%	88-22%	16-100%	23-100%	99-0%	98-0%	98-15%	99-15%	84-0%	99-0%		100-0%	99-0%	99-0%
Feller	40420.RLC	230/50Hz			5-98%	6-98%	84-3%	85-5%	4-100%	3-100%	99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%	100-0%		99-10%
Feller	31000	230/50Hz			0-97%	0-97%	98-0%	98-0%	0-100%	0-100%	100-0%	100-0%	94-9%	94-9%	97-0%	98-0%	100-0%			
Gira	226200	230/50Hz			0-98%						99-0%	99-0%		100-1%		82-1%		100-0%	85-0%	99-0%
Gira	030700	230/50Hz	20-525	T	16-99%	19-99%	92-22%	92-23%	26-98%	28-100%	99-16%	99-7%	100-2%	100-2%	100-10%	98-1%		100-0%	99-9%	100-24%

\*G4 and GY6.35 versions tested with HTM 70 transformer

## DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

Legend					LINE 78 75		LINE 78 100		LINE 118 125		LINE 118 150		PIN G9 32		PIN G9 40		PIN G4 20		LED PIN DIM GY6.35					
Good dimmability with indicated number of lamps (dimming range greater than 75%)																								
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)																								
Undesired dimmability																								
Not tested																								
																								
					EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code	EAN / Basic Code							
					4058075811751 / AC11919 4058075432512 / AC11919		4058075138506 / AC11780 4058075432536 / AC11780		4058075811737 / AC11924 4058075432550 / AC11924		4058075271975 / AC18433 4058075432574 / AC18433		4058075811935 / AC02801 4058075431874 / AC02801		4058075271777 / AC17654 4058075432246 / AC17654		4058075271722 / AC17652 4058075431904 / AC17652		4058075432185 / AC24750					
Dimmer					Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps		Dimming range 1 Lamp		Dimming range 4 Lamps	
Brand	Model	Voltage range	Power	Type	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps	1 Lamp	4 Lamps
Gira	117600	230/50Hz	50-420	U	31-98%	33-98%	89-31%	95-29%	44-100%	41-100%	99-19%	99-12%	100-19%	100-11%	99-4%	99-2%	100-0%	100-0%	100-0%	100-0%	99-0%	99-16%	99-0%	99-16%
Gira	238500	230/50Hz			0-100%	0-98%	94-13%	94-13%	13-100%	10-100%	100-8%	99-0%	100-20%	100-8%	99-0%	99-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	99-0%
Gira	217400	230/50Hz	4X20-250	KNX-U	16-97%	14-97%	98-19%	98-16%	23-100%	19-100%	100-1%	98-0%	100-4%	100-6%	98-1%	99-0%	100-1%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Hager	WUD87	230/50Hz	400	LED-U	19-99%	19-99%	89-20%	94-18%	27-100%	22-100%	100-1%	100-1%	100-13%	100-13%	81-0%	99-1%	73-0%	100-14%	100-0%	100-0%	99-0%	99-7%	99-0%	99-7%
Hamilton	KP1X40	230/50Hz	400																					
Hugo Müller	paladin 872110 led	230/50Hz			41-97%	40-97%	95-3%	100-3%	0-100%	3-100%	99-42%	99-41%	100-7%	100-18%	98-34%	99-42%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%	100-0%
Jung	225 NVDE	230/50Hz	20-500	L	0-98%						99-0%	99-0%	100-1%	100-1%	82-1%							85-0%	99-0%	99-0%
Jung	225 TDE	230/50Hz			16-99%	19-99%	92-22%	92-23%	26-98%	28-100%	99-16%	99-7%	100-2%	100-2%	100-10%	98-1%						100-0%	99-9%	100-24%
Jung	254 UDIE1	230/50Hz			31-98%	33-98%	89-31%	95-29%	44-100%	41-100%	99-9%	100-3%	100-19%	100-11%	99-0%	98-0%						100-0%	99-0%	99-0%
Jung	1224 LEDUDE	230/50Hz		LED	0-100%	0-98%	94-13%	94-13%	13-100%	10-100%	100-8%	99-0%	100-20%	100-8%	99-0%	99-0%						100-0%	100-0%	99-0%
Jung	3904 REGHE	230/50Hz			16-97%	14-97%	98-19%	98-16%	23-100%	19-100%	100-0%	99-0%	100-4%	100-6%	98-12%	98-0%	100-0%	100-13%						
Legrand	665114	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%						100-0%	95-0%	100-0%
Legrand	574319/574339	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%						100-0%	95-0%	100-0%
Legrand	572239/572739	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%						100-0%	95-0%	100-0%
Legrand	078407/079207	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%						100-0%	95-0%	100-0%
Legrand	048869/048871	230/50Hz	400	U	6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%						100-0%	95-0%	100-0%
Legrand	067083/048869	230/50Hz			6-98%	8-98%	78-4%	82-6%			99-5%	99-0%	97-2%	97-2%	98-0%	98-0%						100-0%	95-0%	100-0%
Legrand	770061	230/50Hz	400	RL		12-98%	90-12%	92-14%	19-100%	20-100%			98-1%	99-5%			59-0%							
Legrand	099314	230/50Hz	300	RL	0-99%	0-99%	90-11%	91-11%			99-0%	98-0%	99-14%	99-3%	99-0%	98-0%						100-0%	100-0%	
Legrand	770062	230/50Hz	400	RLC	0-97%	0-97%	95-14%	95-14%	17-99%	17-99%	99-3%	99-0%	100-1%	99-9%	99-0%	98-0%						100-0%	100-0%	
Legrand	078405	230/50Hz	600	RL	0-97%	0-97%					99-1%	99-0%	100-4%	91-4%		94-0%	99-1%	100-0%				92-0%	99-0%	99-0%
Legrand	066721	230/50Hz	3-75	L																		99-0%	99-0%	
Legrand	752162		5-60W	T																		77-0%	99-0%	
MASTER	DM-DGL	230/50Hz	1000	U / LED	2-97%	2-97%																		

## DIMMER COMPATIBILITY LINE R7S + PIN G9 + PIN G4 + PIN GY6.35

Legend					LINE 78 75	LINE 78 100	LINE 118 125	LINE 118 150	PIN G9 32	PIN G9 40	PIN G4 20	LED PIN DIM GY6.35						
Good dimmability with indicated number of lamps (dimming range greater than 75%)													EAN/ Basic Code					
Limited dimmability with indicated number of lamps (dimming range smaller than 75%)													EAN/ Basic Code					
Undesired dimmability													EAN/ Basic Code					
Not tested													EAN/ Basic Code					
					4058075811751 / AC11919 4058075432512 / AC11919	4058075138506 / AC11780 4058075432536 / AC11780	4058075811737 / AC11924 4058075432550 / AC11924	4058075271975 / AC18433 4058075432574 / AC18433	4058075811935 / AC02801 4058075431874 / AC02801	4058075271777 / AC17654 4058075432246 / AC17654	4058075271722 / AC17652 4058075431904 / AC17652	4058075432185 / AC24750						
Dimmer					Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps	Dimming range 1 Lamp	Dimming range 4 Lamps
Brand	Model	Voltage range	Power	Type														
NEXUS	881P-01	230/50Hz	400	L	0-97%		0-100%	0-100%		99-0%		99-9%		99-0%	100-0%	91-0%		
NIKO	310-01900	230/50Hz	5-200	U	6-97%	6-97%	97-6%	100-6%	6-100%	6-100%		100-0%	100-4%	100-8%	100-0%	99-0%	100-0%	100-0%
NIKO	330-00700	230/50Hz	5-200	U	9-97%	9-97%	98-11%	100-11%	14-100%	14-100%		99-0%	100-0%	100-5%	100-5%	99-0%	99-0%	99-0%
Odace	S520512	230/50Hz			27-98%	7-98%	90-23%	90-23%	32-100%	29-100%		99-1%	100-0%	100-19%	100-9%			99-0%
Odace	S520511	230/50Hz			14-98%	14-98%	86-17%	88-22%	16-100%	23-100%		99-0%	98-0%	98-15%	99-15%	84-0%	99-0%	100-0%
Odace	S520515	230/50Hz			5-98%	6-98%	84-3%	85-5%	4-100%	3-100%		99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%
Odace	S520518	230/50Hz			0-97%	0-98%	58-0%	84-0%	0-100%	0-100%		99-0%	98-0%	91-6%	98-6%	78-0%	96-0%	57-0%
Osram	HTI DALI 315 DIM	230/50Hz	20-315	DALI-T	12-98%		97-17%	92-16%	17-99%	16-100%		100-4%	99-0%	94-4%	100-2%	99-0%	99-0%	86-0%
PEHA	435 HAN	230/50Hz	60-600	L	0-98%	18-98%	66-12%	84-24%	26-100%	29-100%		99-2%	98-0%		95-26%		51-0%	98-0%
Schneider	400GLI	230/50Hz	40-400	T	0-99%	0-99%			0-100%	0-100%		99-0%	99-0%			86-0%	51-0%	87-0%
Schneider	SBD315RC	230/50Hz			28-98%	10-98%	92-25%	92-24%	34-99%	32-100%		99-0%	99-0%					100-0%
Schneider	SBD200LED	230/50Hz	400		27-98%	7-98%	90-23%	90-23%	32-100%	29-100%		99-1%	100-0%	100-19%	100-9%		90-0%	99-0%
Schneider	SBD600RCL	230/50Hz			0-98%	0-98%	85-2%	87-4%	0-100%	0-100%		99-14%	99-7%	95-2%	99-2%		83-1%	78-0%
Schneider	SBD630RC	230/50Hz			13-99%	11-98%	92-14%	92-13%	17-100%	14-100%		99-18%	99-11%	100-2%	100-4%	99-2%	75-0%	100-9%
Schneider	SBD600RL	230/50Hz			14-98%	14-98%	86-17%	88-22%	16-100%	23-100%		99-0%	98-0%	98-15%	99-15%	84-0%	99-0%	100-0%
Schneider	SBD420RCL	230/50Hz			5-98%	6-98%	84-3%	85-5%	4-100%	3-100%		99-0%	99-0%	99-6%	99-6%	75-0%	95-0%	67-0%
Schneider	5170	230/50Hz			0-84%	0-75%			32-100%	30-100%		76-23%		100-9%	100-12%	69-8%	99-0%	97-0%
Schneider	SBD400RL	230/50Hz			0-98%	0-98%	86-0%	87-0%	0-100%	0-100%		99-0%	99-0%	95-5%	100-5%	81-0%	98-0%	100-0%
Schneider	SBD5PL	230/50Hz			0-97%	0-98%	58-0%	84-0%	0-100%	0-100%		99-0%	98-0%	91-6%	98-6%	78-0%	96-0%	57-0%
Schneider	ATTD1000RL	230/50Hz			0-97%	0-97%	98-0%	98-0%	0-100%	0-100%		100-0%	99-0%	94-9%	94-9%	98-0%	98-0%	100-0%
Shuttle	SDIM-T-LED-500W	230/50Hz	2-500	T & LED-T	3-98%	4-97%	97-14%	97-14%	14-100%	14-100%		99-2%	100-0%	100-9%	100-9%	100-0%	98-0%	99-2%
Siemens	5TC8 284	230/50Hz	20-525	T			93-16%	89-11%				99-13%	99-2%	90-1%	64-1%	66-11%	89-1%	100-0%
Siemens	SWG1-527-1AB31	230/50Hz	20-500	KNX-U	0-97%	0-97%	95-29%	95-22%	0-100%	16-100%		100-1%	98-0%	100-2%	100-6%	98-1%	99-0%	100-1%
VADSBO	LD 220	230/50Hz	1-200	U	0-98%	0-97%	100-3%	100-3%	4-100%	0-100%		100-0%	99-0%	100-26%	100-26%	98-0%	98-0%	100-0%
VARILIGHT	HQ3W	230/50Hz	400		6-97%	6-95%	94-9%	94-9%	12-100%	9-100%		99-1%	99-0%	87-9%	100-18%	98-0%	86-0%	99-1%
VARILIGHT	JQP401W	230/50Hz	400	T	3-97%	9-95%	77-4%	94-12%	6-100%	8-100%			99-0%	100-30%	98-17%		100-0%	100-0%
Vimar	20135	230/50Hz	3 - 100	U	6-97%	3-97%	91-9%	93-9%	9-100%	9-100%		99-0%	100-0%	100-2%	100-14%	100-0%	98-0%	99-0%
ZANO	WH401	230/50Hz	400	L	0-97%	0-95%	78-0%	94-0%	0-100%	0-100%						88-0%	97-0%	100-0%
ZANO	WH251	230/50Hz	250		0-97%	0-95%	76-0%	94-0%	0-100%	0-100%								100-0%
ZANO	Z GRID 700	230/50Hz	250	LED					0-100%	0-100%				93-21%	91-21%			63-0%
ZANO	Z GRID 500	230/50Hz	500						0-100%	0-100%				71-6%	99-6%	96-0%	89-0%	99-0%

\*G4 and GY6.35 versions tested with HTM 70 transformer

**Please note:**

- The compatibility list is based upon testing conducted by the manufacturer in a lab simulated environment, and the results can vary in certain field applications due to a number of factors. LEDVANCE does not take over any responsibility, warranty or liability that this results can also be achieved by using the devices under other conditions, or when using successor models of the tested devices, or different models of the same manufacturer, or when using other LED lamp types.
- The absence of a dimmer from this chart does not necessarily imply incompatibility.
- Please reference the dimmer manufacturer's instructions for installation.
- LED lamps contain several electronic components. Under unfavourable conditions these can lead to acoustic noise. In case of resonance even low noise can cause audible effect. Possible factors influencing this are the installation, the design of the lamp holder and the luminaire (acoustic resonance effect) as well as the dimmer or the transformer (harmonic or electronic resonance).
- Subject to change without notice.
- Errors and omission excepted.
- Always make sure to use the most recent release.

**Application Notes:**

- For best dimming results trailing edge dimmer type is recommended.
- Trailing edge type dimmer requires the neutral wire for installation.

**LEDVANCE GmbH**

Head Office:

Parkring 29-33  
85748 Garching, Germany  
Phone +49 89 780673-100  
Fax +49 89 780673-XXX  
[www.ledvance.com](http://www.ledvance.com)

**Bitte beachten:**

- Die Kompatibilitätsliste basiert auf Tests, die der Hersteller in einer im Labor simulierten Umgebung durchgeführt hat. Die Ergebnisse können aufgrund verschiedener Faktoren in manchen Praxisanwendungen abweichen. LEDVANCE übernimmt keinerlei Verantwortung, Garantie oder Haftung dafür, dass diese Ergebnisse tatsächlich mit den Geräten unter anderen Bedingungen, mit Nachfolgemodellen der getesteten Geräte, mit anderen Modellen desselben Herstellers oder bei Verwendung anderer LED-Lampentypen erreicht werden.
- Das Fehlen eines Dimmers in der Abbildung bedeutet nicht, dass ein Dimmer nicht kompatibel ist.
- Lesen Sie stets die Installationsanweisungen des Dimmerherstellers.
- LED-Lampen bestehen aus mehreren elektronischen Komponenten. Unter ungünstigen Bedingungen können diese Störgeräusche erzeugen. Im Resonanzfall können selbst geringe Geräusche einen hörbaren Effekt hervorrufen. Einflussfaktoren können die Installation, die Gestaltung des Lampenträgers, die Leuchte (akustischer Resonanzeffekt), der Dimmer oder der Trafo (Oberschwingungen oder elektronische Resonanz) sein.
- Änderungen vorbehalten.
- Irrtümer und Auslassungen vorbehalten.
- Vergewissern Sie sich, dass Sie stets die aktuellste Version benutzen.

**Anwendungshinweis:**

- Um bestmögliche Dimmerergebnisse zu erzielen, wird die Verwendung von Phasenabschnitt-Dimmern empfohlen.
- Phasenabschnitt-Dimmer erfordern bei der Installation einen Neutralleiter.