

# LEDVANCE PHASE EV

## Installation Guide

### Side-by-side Mounting Plate

Item No: 78137

Model: EVCSBSMTGPLATE

Side-by-side mounting plate for use with  
EVC48ALVL2C1XX (Level 2 Commercial EVSE) and  
EVCPED (pedestal).



### WARNING

#### Please Read All Instructions Before Attempting Installation

- TO PREVENT PERSONAL INJURY OR PRODUCT DAMAGE ONLY LICENSED ELECTRICIANS SHOULD PROVIDE ALL INSTALLATION SERVICES.
- TO AVOID ELECTRIC SHOCK OR COMPONENT DAMAGE DISCONNECT POWER BEFORE ATTEMPTING INSTALLATION OR SERVICING.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE (NEC) AND ALL APPLICABLE FEDERAL, STATE AND LOCAL ELECTRICAL CODES AND SAFETY STANDARDS.
- ANY ALTERATION OR MODIFICATION OF THIS PRODUCT IS EXPRESSLY FORBIDDEN AS IT MAY CAUSE SERIOUS PERSONAL INJURY, DEATH, PROPERTY DAMAGE AND/OR PRODUCT MALFUNCTION.
- TO PREVENT PRODUCT MALFUNCTION AND / OR ELECTRICAL SHOCK THIS PRODUCT MUST BE PROPERLY GROUNDED.

# Safety Precautions

## IMPORTANT:

**READ CAREFULLY BEFORE INSTALLING THE SIDE-BY-SIDE MOUNTING PLATE. RETAIN FOR FUTURE REFERENCE.**

## GENERAL:

Upon receipt of the side-by-side mounting plate, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier.

---

# What's Included


- (1) Side-by-side mounting plate
- (1) Panel cover
- (14) M5\*12mm screws

# Tools You Will Need


- Phillips screwdriver
- Wire cutter & stripper
- Crimping pliers

## Side-by-side (SBS) Mounting Plate Installation

1. Remove the back 2 cover panels by unscrewing the 12 screws.

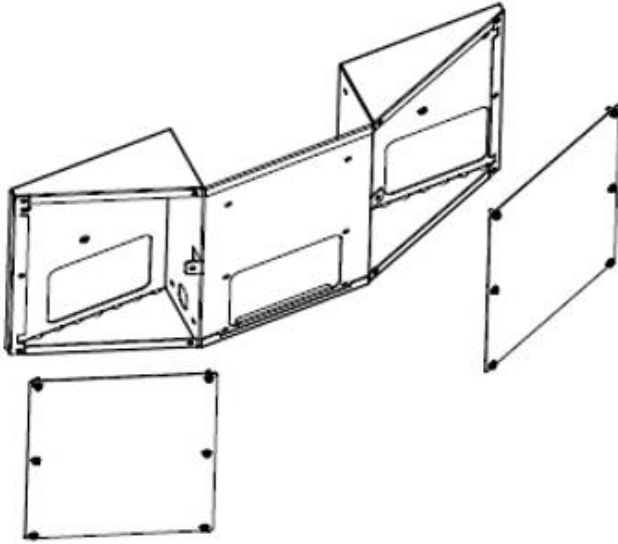


2. Next, attach the SBS mounting plate to the pedestal with (10) M5 provided screws.

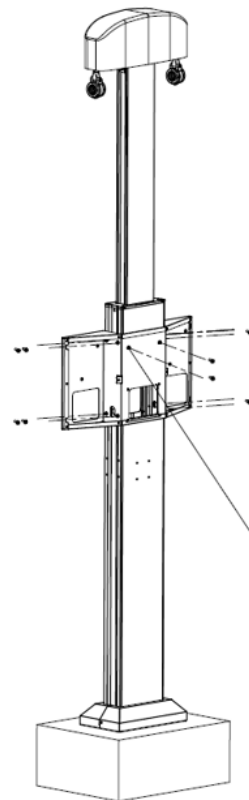


Attach SBS mounting plate with (10) M5 screws


3. Install the holsters, cable hangers, and front panel cover.

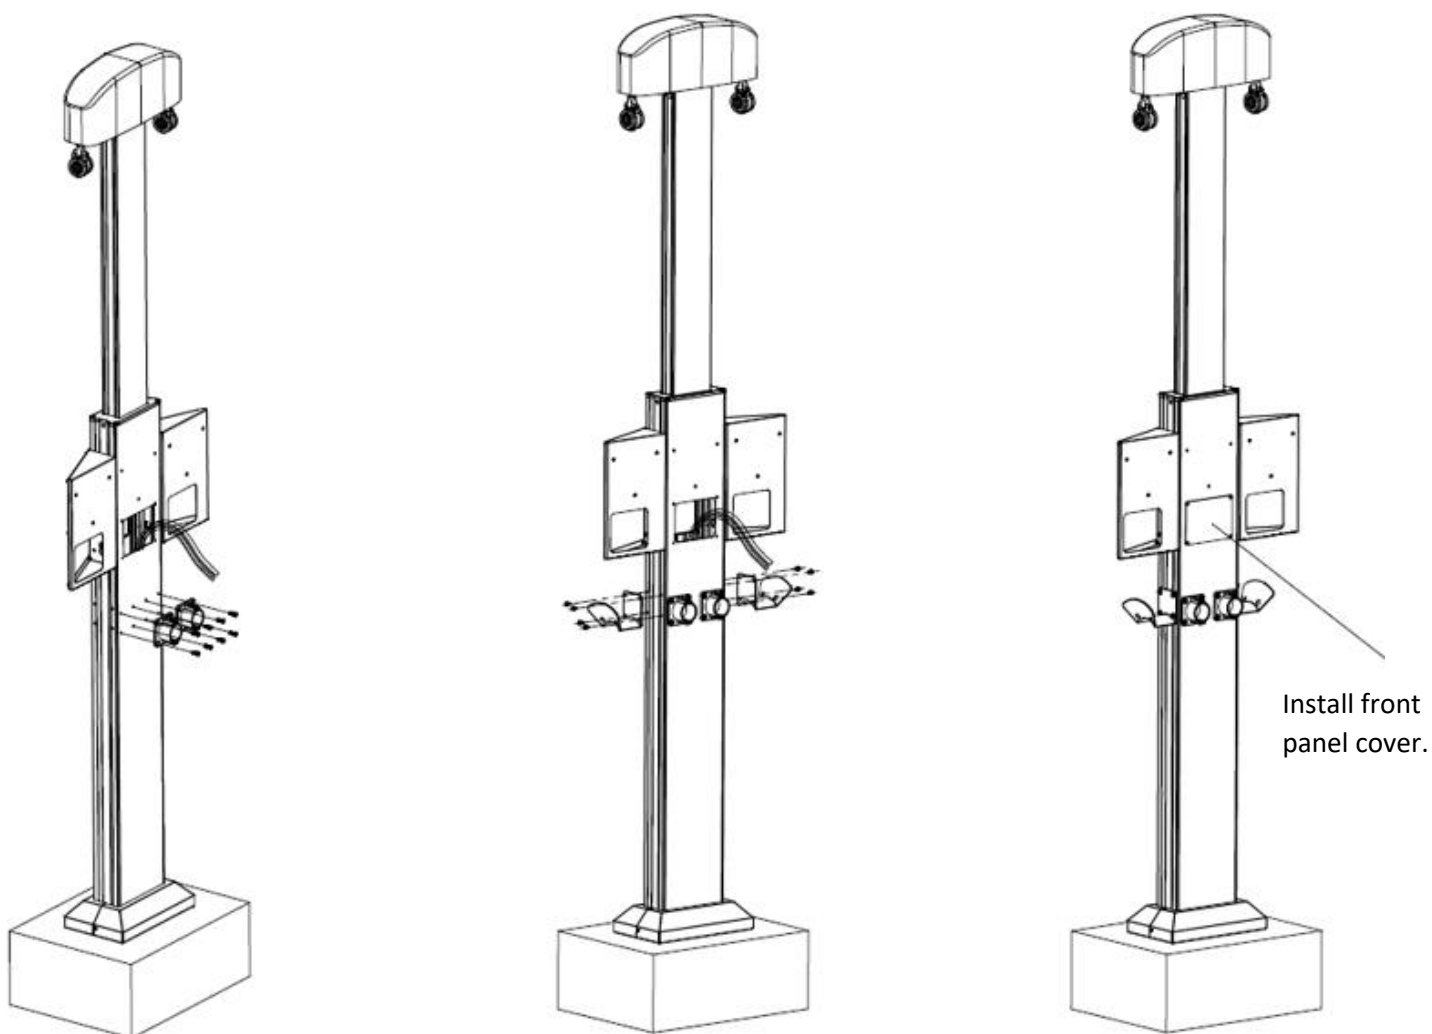


4. Install charger mounting plate and charger as shown in the pictures below. Repeat for both sides.

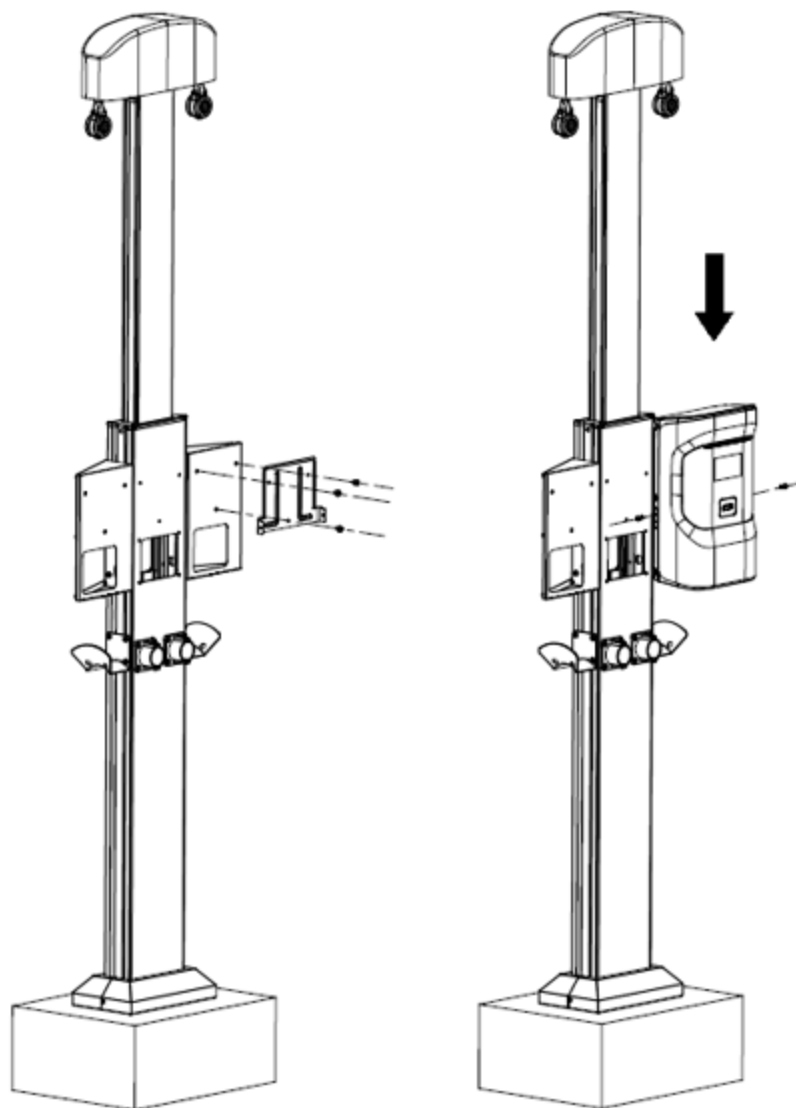

5. Feed the wirings through the holes on each side and make the connections. When finished, install the back plates and the back panel cover.

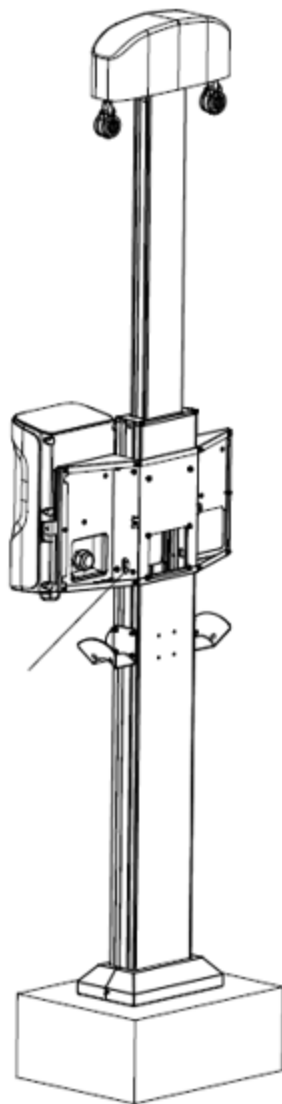

Feed wirings through hole on each side.

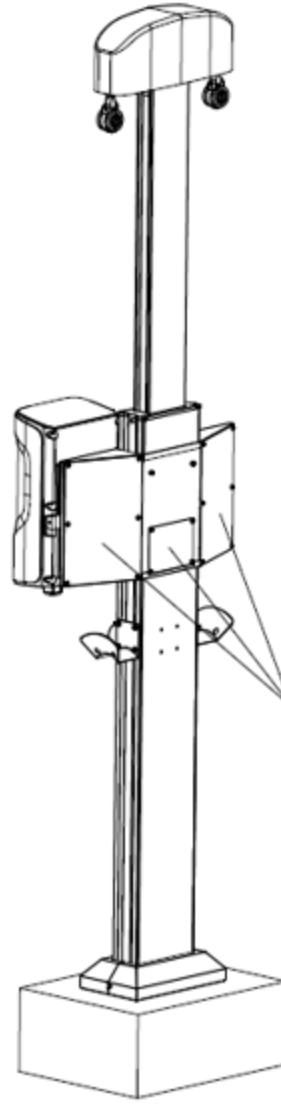

Install back plates and back panel cover.