




Spectrum Test Report

Sample : Date : 2024-10-23 19:24:01
Specification : CYLINDPS010UNHD8SC2R3BZP Min 500(Sam. Status) + up:
Sample No. : Standard : LM-79-19
Manufacturer : LEDVANCE LLC Instrument : HaasSuite(EVERFINE)
Remark : Test by : Alan Wang

Test Condition

Temperature : 25.3Deg RH : 65.0%
WL Range : 380nm-780nm IP : 50568 (77%)
Test Mode : Accuracy Test T : 4107 ms

Spectrum : Low

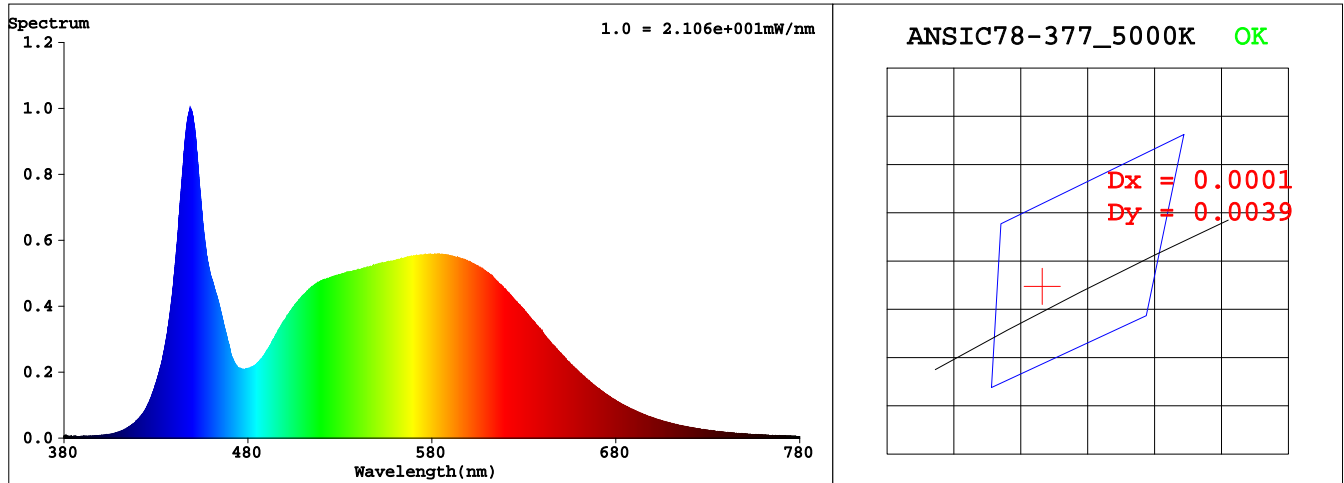

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3414$ $y = 0.3525$ / $u' = 0.2086$ $v' = 0.4846$ ($duv=1.93e-03$)

CCT= 5139K Prcp WL: $L_d=568.3nm$ Purity=8.2%

Peak WL: $L_p=449nm$ FWHM: $=19.6nm$ Ratio:R=15.5% G=80.1% B=4.5%

Render Index: $R_a = 83.1$ AvgR = 76.3 TM30:Rf=83 Rg=97

EEL: 0.08433 A++ Highest

R1 =82 R2 =87 R3 =91 R4 =84 R5 =83 R6 =83 R7 =87

R8 =68 R9 =9 R10=70 R11=84 R12=64 R13=83 R14=95 R15=76

Photometric & Radiometric Parameters

Flux = 715.5 lm Eff. : 139.21 lm/W $F_e = 2.3468 W$

Electrical parameters

V = 120.00 V I = 0.04310 A P = 5.140 W PF = 0.9938 F=60.00 Hz

Dongguan New Testing Centre Co., Ltd

3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China