




Spectrum Test Report

Sample : Date : 2024-10-22 20:07:18
Specification : CYLINDPS030UNHD8SC2R6BZP Max 500Sam. Statusn :
Sample No. : Standard : LM-79-19
Manufacturer : LEDVANCE LLC Instrument : HaasSuite(EVERFINE)
Remark : Test by : Alan Wang

Test Condition

Temperature : 25.3Deg RH : 65.0%
WL Range : 380nm-780nm IP : 51057 (78%)
Test Mode : Accuracy Test T : 865 ms

Spectrum : Low

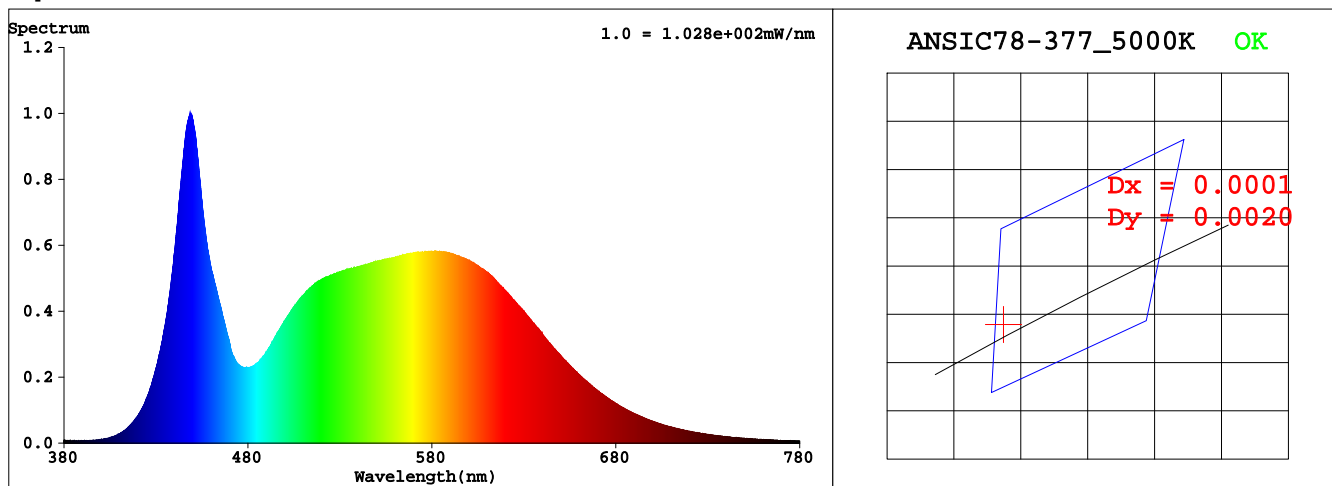

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3378$ $y = 0.3475$ / $u' = 0.2080$ $v' = 0.4816$ ($duv=9.71e-04$)

CCT= 5281K Prcp WL: Ld=565.5nm Purity=5.6%

Peak WL: Lp=449nm FWHM: =23.0nm Ratio:R=15.3% G=80.1% B=4.6%

Render Index: Ra = 83.1 AvgR = 76.5 TM30:Rf=83 Rg=97

EEL: 0.10979 A++ Highest

R1 =82 R2 =87 R3 =90 R4 =84 R5 =83 R6 =83 R7 =87

R8 =69 R9 =10 R10=69 R11=84 R12=65 R13=83 R14=95 R15=77

Photometric & Radiometric Parameters

Flux = 3609.4 lm Eff. : 117.07 lm/W Fe = 12.103 W

Electrical parameters

V = 120.00 V I = 0.2574 A P = 30.83 W PF = 0.9981 F=60.00 Hz

Dongguan New Testing Centre Co., Ltd

3F, No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China