

PRODUCT FAMILY DATASHEET

HALOPAR 16 E14

Halogen lamps with parabolic reflector PAR16, with E14 screw base



AREAS OF APPLICATION

- General illumination
- Dining table lighting
- Object lighting
- Accent lighting
- Shops
- Restaurants, hotels and similar prestigious applications

PRODUCT BENEFITS

- Brilliant accent light
- With whole glass reflector for brilliant lighting effects
- Instant 100 % light, no warm-up time
- Approved for use in open luminaires (to IEC 60598-1)
- Contains no mercury
- UV filter

PRODUCT FEATURES

- Average life: 2,000 h
- 100 % dimmable
- Perfect color rendering (R_a : 100)
- Color temperature: 2,700 K



TECHNICAL DATA

Product description	Electrical data				Photometrical data						
	Nominal wattage	Nominal voltage	Rated wattage	Power factor λ	Nominal useful luminous flux 90°	Color temperature	Light color (designation)	Color rendering index Ra	Lumen main.fact.at end of nom.life time	Color temperature	Luminous flux
HALOPAR 16 40 W 230 V 35° E14 ¹⁾	40.00 W	230.0 V	40.00 W	1.00	250 lm	2800 K	Warm White	100	0.75	2800 K	250 lm

Product description	Color rendering index Ra	Light technical data			Dimensions & weight	Lifespan			Additional product data		
		Beam angle	Starting time	Warm-up time (60 %)		Diameter	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Base (standard designation)	Mercury content
HALOPAR 16 40 W 230 V 35° E14 ¹⁾	100	35 °	0.0 s	0.00 s	50.7 mm	2000 h	2000 h	50000	E14	0.0 mg	Yes

Product description	Capabilities		Certificates & standards	Country-specific categorizations
	Burning position	Dimmable	Energy consumption	ILCOS
HALOPAR 16 40 W 230 V 35° E14 ¹⁾	Any	Yes	40 kWh/1000h	HAGS/UB-40-230-E14-51/35

¹⁾ Not suitable for outdoor use or damp conditions/Banned from 1.9.2016 as per EU phase-out plan

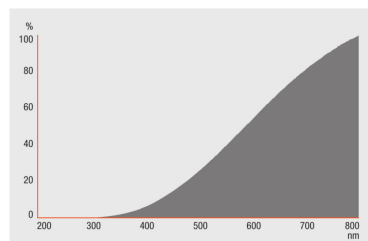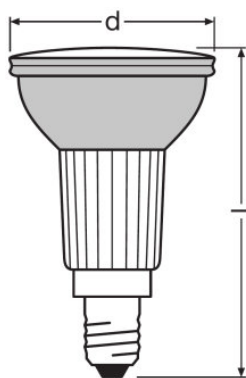

HALOPAR 16 40 W 230 V 35° E14

HALOPAR 16 40 W 230 V 35° E14

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300664910	Shipping carton box 20	271 mm x 170 mm x 120 mm	1253.00 g	5.53 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.