

# PRODUCT DATASHEET

## DECOSTAR 51 TITAN 20 W 12 V 36° GU5.3

DECOSTAR 51 TITAN | Halogen dichroic reflector lamps with 51 mm diameter



---

### AREAS OF APPLICATION

- General illumination
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings

---

### PRODUCT BENEFITS

- Brilliant accent light
- Constant bluish appearance of the light escaping at the back of the reflector
- Dichroic reflector reduces the heat in the light beam by up to 66 %
- Constant luminous intensity and constant color location throughout the lifetime
- Flat clear shield
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter
- Contains no mercury

---

### PRODUCT FEATURES

- Average life: 4,000 h
- 100 % dimmable
- Color rendering index  $R_a$ : 100
- Color temperature: 3,000 K
- Diameter: 51 mm
- Deco cover

**TECHNICAL DATA**

Electrical data

Nominal wattage	20.00 W
Nominal voltage	12 V
Rated wattage	20.00 W
Power factor $\lambda$	1.00


Photometrical data

Nominal useful luminous flux 90°	250 lm
Luminous intensity [PIM]	780 cd
Rated color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	100
Lumen main.fact.at end of nom.life time	0.75
Color temperature	3000 K
Luminous flux	300 lm
Color rendering index Ra	100
Rated useful luminous flux 90°	250 lm
Rated peak intensity	780 cd

Light technical data

Beam angle	36 °
Nominal beam angle	36 °
Starting time	0.0 s
Warm-up time (60 %)	0.00 s
Rated beam angle (half peak value)	36.00 °

Dimensions & weight



Diameter	51.0 mm
----------	---------

<b>Length</b>	46.0 mm
<b>Overall length</b>	46.0 mm
<b>Outer bulb</b>	MR51
<b>Maximum diameter</b>	51.0 mm

### Lifespan

<b>Nominal lamp life time</b>	4000 h
<b>Rated lamp life time</b>	4000 h
<b>Number of switching cycles</b>	100000

### Additional product data

<b>Base (standard designation)</b>	GU5.3
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes

### Capabilities

<b>Burning position</b>	Any
<b>Dimmable</b>	Yes


### Certificates & standards

<b>Energy consumption</b>	22 kWh/1000h
<b>Energy efficiency class</b>	B

### Country-specific categorizations

<b>ILCOS</b>	HRGS//UB-20-12-GU5.3-51/36
--------------	----------------------------

Light Distribution

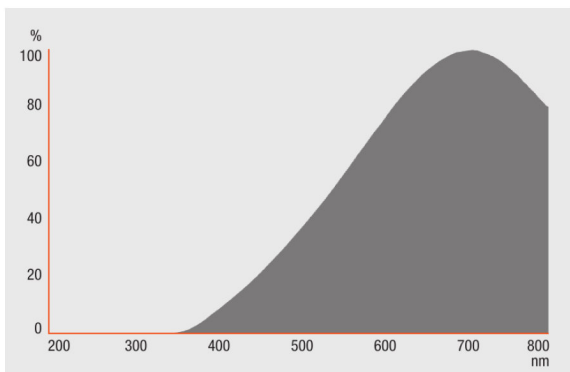

Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300428659	Folding carton box 1	58 mm x 46 mm x 46 mm	41.00 g	0.12 dm <sup>3</sup>
4050300531809	Shipping carton box 20	238 mm x 122 mm x 109 mm	896.00 g	3.16 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.