

PRODUCT FAMILY DATASHEET

DECOSTAR 35 SUPERSTAR 2000

Halogen dichroic reflector lamps with 35 mm diameter



AREAS OF APPLICATION

- General illumination
- Workplace lighting
- Kitchen lighting
- Mirror lighting
- Object lighting
- Shops
- Restaurants, hotels and similar prestigious applications

PRODUCT BENEFITS

- Brilliant accent light
- Dichroic reflector reduces the heat in the light beam by up to 66 %
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter

PRODUCT FEATURES



- Average life: 2,000 h
- 100 % dimmable
- Color rendering index R_a : 100
- Base: GU4
- Deco cover

TECHNICAL DATA

Product description	Electrical data				Photometrical data						
	Nominal wattage	Nominal voltage	Rated wattage	Power factor λ	Color temperature	Light color (designation)	Color rendering index Ra	Lumen main.fact.at end of nom.life time	Color temperature	Luminous flux	Color rendering index Ra
DECOSTAR 35 SST 2000 14 W 12 V 36° GU4	14.00 W	12 V	14.00 W	1.00	2800 K	Warm White	100	0.75	2800 K	160 lm	100
DECOSTAR 35 SST 2000 25 W 12 V 36° GU4	25.00 W	12 V	25.00 W	1.00	2900 K	Warm White	100	0.75	2900 K	340 lm	100

Product description	Light technical data			Dimensions & weight	Lifespan			Additional product data		
	Beam angle	Starting time	Warm-up time (60 %)	Diameter	Nominal lamp life time	Rated lamp life time	Number of switching cycles	Base (standard designation)	Mercury content	Mercury-free
DECOSTAR 35 SST 2000 14 W 12 V 36° GU4	36 °	0.0 s	0.00 s	35.0 mm	4000 h	4000 h	100000	GU4	0.0 mg	Yes
DECOSTAR 35 SST 2000 25 W 12 V 36° GU4	36 °	0.0 s	0.00 s	35.0 mm	4000 h	4000 h	100000	GU4	0.0 mg	Yes

Product description	Capabilities		Certificates & standards	Country-specific categorizations
	Burning position	Dimmable	Energy consumption	ILCOS
DECOSTAR 35 SST 2000 14 W 12 V 36° GU4	Any	Yes	16 kWh/1000h	HRGS//UBIB-14-12-GU4-35/36
DECOSTAR 35 SST 2000 25 W 12 V 36° GU4	Any	Yes	27 kWh/1000h	HRGS//UBIB-25-12-GU4-35/36

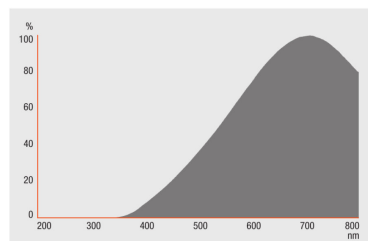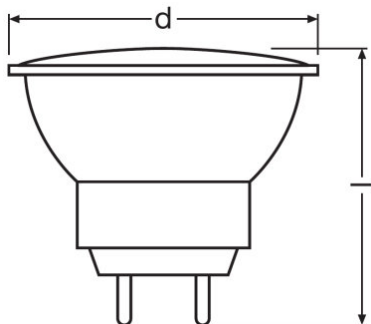

DECOSTAR 35 SST 2000 14 W 12 V 36°
GU4, DECOSTAR 35 SST 2000 25 W 12 V
36° GU4

DECOSTAR 35 SST 2000 14 W 12 V 36°
GU4, DECOSTAR 35 SST 2000 25 W 12 V
36° GU4

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321997630	Shipping carton box 10	354 mm x 130 mm x 148 mm	366.95 g	6.81 dm ³
4008321997654	Shipping carton box 10	354 mm x 130 mm x 148 mm	368.73 g	6.81 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.