

# PRODUCT DATASHEET

## NAV-E 400 W SUPER XT

VIALOX NAV-E SUPER XT | High-pressure sodium vapor lamps for open and enclosed luminaires



---

### AREAS OF APPLICATION

- Streets
- Outdoor lighting
- Industrial installations
- Suitable for use in open and enclosed luminaires
- Outdoor applications only in suitable luminaires
- Alternative to sodium twin arc lamps

---

### PRODUCT BENEFITS

- Very long lifetime
- Very high luminous efficacy
- Extended service time (lamp replacement cycle): 8 years (at approx. 11 h/day)
- Very good luminous flux maintenance throughout the life of the lamp
- Optimum energy efficiency on POWERTRONIC PTo 3DIM ECGs

---

### PRODUCT FEATURES

- Lamp survival rate: 95 % after 28,000 h burning time
- Very long average lifetime: up to 48,000 h
- Lamp maintenance factor:  $\geq 80$  % after 24,000 h burning time (according to DIN 13201)
- ErP compliant according to EU Regulation 245/2009
- Dimmable on conventional control gears and electronic control gears



**TECHNICAL DATA**

Electrical data


<b>Rated wattage</b>	410.00 W
<b>Lamp current</b>	4.42 A
<b>Nominal wattage</b>	400.00 W
<b>Nominal voltage</b>	105 V
<b>Ignition voltage</b>	3.3 / 5.0 kVp <sup>1)</sup>

<sup>1)</sup> Minimum / Maximum

Photometrical data

<b>Rated luminous flux</b>	56500 lm
<b>Color temperature</b>	2000 K
<b>Rated LLMF at 2,000 h</b>	0.98
<b>Rated LLMF at 4,000 h</b>	0.97
<b>Rated LLMF at 6,000 h</b>	0.96
<b>Rated LLMF at 8,000 h</b>	0.95
<b>Rated LLMF at 12,000 h</b>	0.94
<b>Rated LLMF at 16,000 h</b>	0.94
<b>Rated LLMF at 20,000 h</b>	0.94
<b>Luminous flux</b>	56500 lm
<b>Color rendering index Ra</b>	≤25

Dimensions & weight

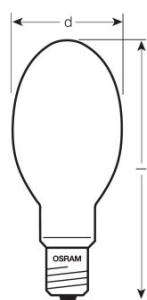

<b>Diameter</b>	122.0 mm
<b>Length</b>	290.0 mm
<b>Product weight</b>	222.00 g

Temperatures & operating conditions

<b>Maximum permitted outer bulb temperature</b>	400 °C
-------------------------------------------------	--------

Maximum permitted base edge temperature	250 °C
-----------------------------------------	--------

### Lifespan

Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.99
Rated lamp survival factor at 16,000 h	0.99
Rated lamp survival factor at 20,000 h	0.98
Lifespan B5	28000 h
Lifespan B50	48000 h
Lifespan B10	34000 h
Operation mode LLMF/LSF	50 Hz

### Additional product data

Base (standard designation)	E40
Product remark	Important: Before replacing for NAV Standard lamps in existing installations, check that the igniters are suitable
Design / version	Coated
System guarantee level	3 (2/5)
Mercury content	24.0 mg

### Capabilities

Dimmable	Yes
Burning position	Any
Enclosed luminaire required	No


### Certificates & standards

Energy efficiency class	A++
Energy consumption	451 kWh/1000h

### Country-specific categorizations

ILCOS	SE-400-H/E/SL-E40-122/290
-------	---------------------------

Light Distribution

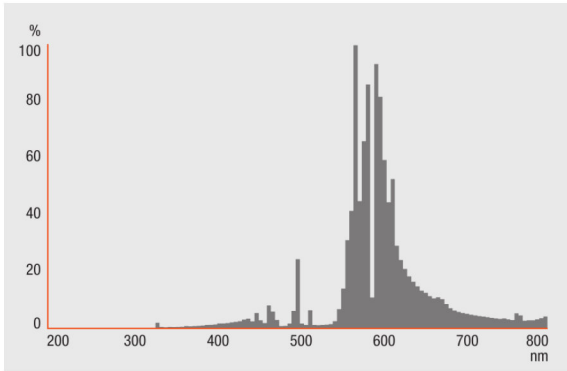

Spectral power distribution

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075803671	Round wrap 1	125 mm x 125 mm x 295 mm	337.00 g	4.61 dm <sup>3</sup>
4058075803800	Shipping carton box 12	541 mm x 416 mm x 317 mm	3758.00 g	71.34 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For more information on the system guarantee and the terms and conditions of the guarantee visit [www.ledvance.com/system-guarantee](http://www.ledvance.com/system-guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.