

PRODUCT DATASHEET

OTi DALI 10/220...240/700 NFC

OPTOTRONIC Intelligent – DALI LT2 NFC | Compact constant current LED drivers



AREAS OF APPLICATION

- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for use in luminaires with flexible current setting
- Suitable for indoor SELV installations
- Suitable for luminaires of protection classes I and II
- Suitable for downlights, spotlights and LED panels
- Installation via Cable Clamp Kit possible (depending on version of product)

PRODUCT FAMILY BENEFITS

- Versatile DALI window driver due to flexible output characteristic
- Very high efficiency
- Protection of the system thanks to thermal management and Smart Control
- High-quality dimming of 1...100 % by amplitude dimming
- Easy and fast output current setting via NFC

PRODUCT FAMILY BENEFITS

- Versatile DALI window driver due to flexible output characteristic
- Very high efficiency
- Protection of the system thanks to thermal management and Smart Control
- High-quality dimming of 1...100 % by amplitude dimming
- Easy and fast output current setting via NFC

VERSATILE SCOPE OF APPLICATION DUE TO OSRAM DALI TECHNOLOGY:

- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable
- Feedback of power consumption and operating hours (Fit for SMART GRID)
- Suitable for buildings according to EPBD/BREEAM/LEED due to automatic Constant Lumen Output setting

VERSATILE SCOPE OF APPLICATION DUE TO OSRAM DALI TECHNOLOGY:

- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable
- Feedback of power consumption and operating hours (Fit for SMART GRID)
- Suitable for buildings according to EPBD/BREEAM/LEED due to automatic Constant Lumen Output setting

PRODUCT FAMILY FEATURES

- Supply voltage: 220...240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198...264 V
- According to EN 61347-1, 61347-2-13, 62384
- RI suppression according to EN 55015:2007+A1:2007/CDN
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547
- Lifetime: up to 100,000 h
- Type of protection: IP20

TECHNICAL DATA

Electrical data

Nominal voltage	220...240 V
Mains frequency	0...60 Hz
Input voltage AC	198...264 V ¹⁾
Input voltage DC	176...276 V
Total harmonic distortion	15 % ²⁾
Power factor λ	> 0.98/> 0.94
ECG efficiency	82 % ³⁾
Device power loss	3.5 W
Power loss in stand-by mode	≤0.15 W
Inrush current	5 A ⁴⁾
Max. ECG no. on circuit breaker 10 A (B)	80
Max. ECG no. on circuit breaker 16 A (B)	130
Max. ECG no. on circuit breaker 25 A (B)	-
Surge capability (L/N-Ground)	2 kV

Surge capability (L-N)	1 kV
Nominal output voltage	2.5...45 V ⁵⁾
U-OUT (working voltage)	60 V
Nominal output current	150...700 mA ⁶⁾
Output current tolerance	±3 %
Output ripple current (100 Hz)	< 2 %
Nominal output power	10 W ⁷⁾
Galvanic isolation	SELV
Galvanic isolation primary/secondary	3.75 kV

1) Permitted voltage range

2) At full load, 220...240 V, 50 Hz / At half load, 220...240 V, 50 Hz

3) Typical / At full load and 230 V


4) $t_{width} = 100 \mu s$ (measured at 50 % I_{peak})

5) Maximum 60 V

6) ±3%

7) Partial load 1.5...10 W

Dimensions & weight

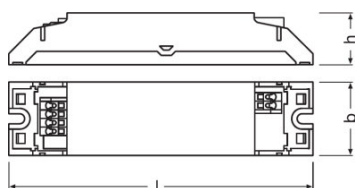

Length	124.0 mm
Width	31.0 mm
Height	21.0 mm
Mounting hole spacing, length	115.0 mm
Cable cross-section, input side	0.2...1.5 mm ² ¹⁾
Cable cross-section, output side	0.2...1.5 mm ² ¹⁾
Product weight	50.00 g
Wire preparation length, input side	8.0...9.1 mm
Wire preparation length, output side	8.0...9.1 mm

1) Solid or flexible leads

Colors & materials

Casing material	Plastic
------------------------	---------

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	75 °C ¹⁾
Max.housing temperature in case of fault	110 °C
Permitted rel. humidity during operation	5...85 % ²⁾

¹⁾ Maximum at the T_c-point

²⁾ Maximum 56 days/year at 85 %

Lifespan

ECG lifetime	50000 / 100000 h ¹⁾
---------------------	--------------------------------

¹⁾ T_c = 75°C, 0.2% / 1,000 h failure rate / T_c = 65°C, 0.1% / 1,000 h failure rate

Additional product data

Encapsulated	No
---------------------	----

Capabilities

Dimmable	Yes
Dimming interface	DALI
Dimming range	1...100 % ¹⁾
Dimming method	Amplitude Modulation
Constant lumen function	Programmable
Overheating protection	Automatic reversible
Overload protection	Automatic reversible
Short-circuit protection	Automatic reversible
No-load proof	Yes
Max. cable length to lamp/LED module	2.0 m
Suitable for fixtures with prot. class	I / II
Suitable for emergency lighting	Yes
Type of connection, output side	Push terminal

¹⁾ For maximum nominal output current
















Certificates & standards

Approval marks – approval	ENEC 10 / VDE / EMC / EL / CE / DALI-2
Standards	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1
Protection class	II
Type of protection	IP20

Logistical data

Temperature range at storage	-40...+85 °C
-------------------------------------	--------------

DOWNLOAD DATA

File	
	User instruction OPTOTRONIC LED Power Supply
	Product Datasheet Technical datasheet OTi DALI 10 NFC
	Certificates 730563_VDE Certificate
	Certificates VDE ENEC Certificate 40038447
	Certificates VDE EMC Certificate 40044675 (EN)
	Declarations of conformity INOTEC Conformity declaration AM07730 OTiD ALI 10 220-240 700 NFC
	Declarations of conformity EATON(CEAG) Conformity declaration AM07730_OTi_DALI_10_220-240_700_NFC
	Declarations of conformity EU Declaration of Conformity 3758701
	Declarations of conformity EU Declaration of Conformity 3365628
	CAD data OTi DALI 10 700 NFC built in IGS
	CAD data OTi DALI 10 700 NFC built in STEP
	CAD data OTi DALI 10 700 NFC independent IGS
	CAD data OTi DALI 10 700 NFC independent STEP
	CAD data PDF OTi DALI 10 700 NFC built in PDF
	CAD data PDF OTi DALI 10 700 NFC independent PDF

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899562646	Shipping carton box 20	165 mm x 258 mm x 71 mm	1120.00 g	3.02 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.