

# PRODUCT FAMILY DATASHEET

## LED STRIP VALUE-600 PROTECTED

IP65 protected LED strips with 600 lm/m for general applications



---

### AREAS OF APPLICATION

- General indoor illumination
- General outdoor illumination
- Decorative illumination
- Private living areas

---

### PRODUCT BENEFITS

- Great scope of design options due to long and flexible LED strips
- Easy mounting on many smooth surfaces thanks to self-adhesive tape
- Suitable for use in damp conditions thanks to high type of protection
- Maximum flexibility due to large range of accessories
- Simple connection thanks to integrated cables on both sides

---

### PRODUCT FEATURES

- Flexible and cuttable LED strip
- Smallest cuttable unit: 100 mm
- Lifetime (L70/B50): up to 20,000 h at Tc max.: 65°C
- Luminous flux: 600 lm/m
- Color rendering index  $R_a$ : > 80
- Available with light color: Warm White, White, Daylight
- Type of protection: IP65



- Dimmable with suitable drivers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim)

**TECHNICAL DATA**

**Electrical data**

Product description	Rated wattage	Nominal wattage	Nominal wattage per meter	Reverse Voltage	Nominal voltage	Input voltage range
LS VAL -600/827/5/IP65	27.00 W	27.00 W	5.5 W <sup>1)</sup>	25 V <sup>2)</sup>	24 V <sup>2)</sup>	23...25 V <sup>2)</sup>
LS VAL -600/830/5/IP65	27.00 W	27.00 W	5.5 W <sup>1)</sup>	25 V <sup>2)</sup>	24 V <sup>2)</sup>	23...25 V <sup>2)</sup>
LS VAL -600/840/5/IP65	27.00 W	27.00 W	5.5 W <sup>1)</sup>	25 V <sup>2)</sup>	24 V <sup>2)</sup>	23...25 V <sup>2)</sup>
LS VAL -600/865/5/IP65	27.00 W	27.00 W	5.5 W <sup>1)</sup>	25 V <sup>2)</sup>	24 V <sup>2)</sup>	23...25 V <sup>2)</sup>

<sup>1)</sup> Value based on first meter of the product

<sup>2)</sup> V<sub>DC</sub>

**Photometrical data**

Product description	Color temperature	Standard deviation of color matching	Light color LED	Luminous flux per meter	Luminous flux	Luminous efficacy	Color rendering index Ra
LS VAL -600/827/5/IP65	2700 K	≤6 sdc	Warm white	510 lm <sup>1)</sup>	2151 lm	93.0 lm/W <sup>1)</sup>	>80
LS VAL -600/830/5/IP65	3000 K	≤6 sdc	White	520 lm <sup>1)</sup>	2196 lm	95.0 lm/W <sup>1)</sup>	>80
LS VAL -600/840/5/IP65	4000 K	≤6 sdc	Cool white	540 lm <sup>1)</sup>	2400 lm	98.0 lm/W <sup>1)</sup>	>80
LS VAL -600/865/5/IP65	6500 K	≤6 sdc	Daylight	550 lm <sup>1)</sup>	2400 lm	100.0 lm/W <sup>1)</sup>	>80

<sup>1)</sup> Value based on first meter of the product

**Light technical data**

Product description	Beam angle
LS VAL -600/827/5/IP65	105 °
LS VAL -600/830/5/IP65	105 °
LS VAL -600/840/5/IP65	105 °
LS VAL -600/865/5/IP65	105 °


**LED module information**

Product description	Number of LEDs per meter	Number of LEDs per module
LS VAL -600/827/5/IP65	60	300
LS VAL -600/830/5/IP65	60	300
LS VAL -600/840/5/IP65	60	300
LS VAL -600/865/5/IP65	60	300

**Dimensions & weight**

Product description	Length	Width	Cable length	Product weight	Short pitch
LS VAL -600/827/5/IP65	5000 mm	10.0 mm	500 mm	207.00 g	No
LS VAL -600/830/5/IP65	5000 mm	10.0 mm	500 mm	207.00 g	No
LS VAL -600/840/5/IP65	5000 mm	10.0 mm	500 mm	207.00 g	No
LS VAL -600/865/5/IP65	5000 mm	10.0 mm	500 mm	207.00 g	No

**Product line drawing**

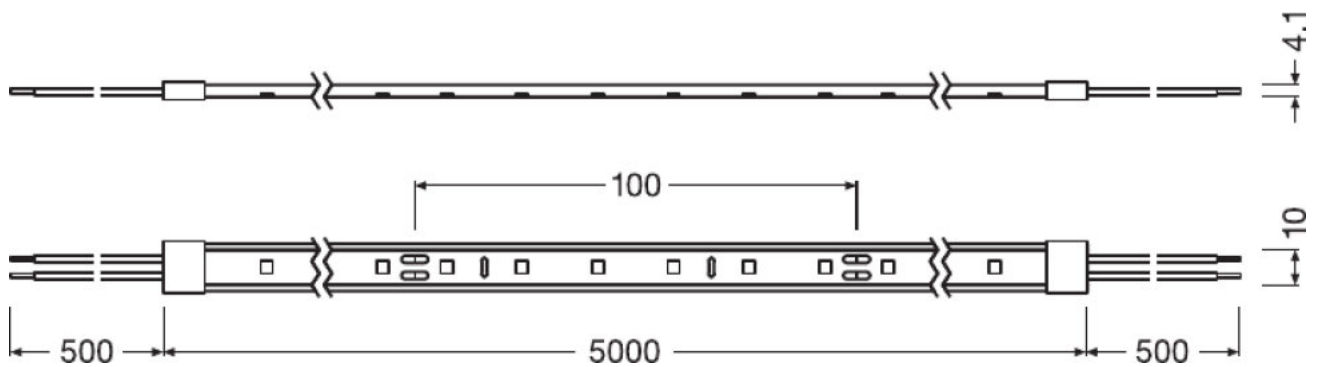

LS VAL -600/827/5/IP65, LS VAL -600/830/5/IP65, LS VAL -600/840/5/IP65, LS VAL -600/865/5/IP65

### Colors & materials

Product description	Cover material
LS VAL -600/827/5/IP65	Silicone
LS VAL -600/830/5/IP65	Silicone
LS VAL -600/840/5/IP65	Silicone
LS VAL -600/865/5/IP65	Silicone

### Temperatures & operating conditions

Product description	Ambient temperature range	Temperature range in operation
LS VAL -600/827/5/IP65	-20...+40 °C <sup>1)</sup>	-20...+65 °C <sup>2)</sup>
LS VAL -600/830/5/IP65	-20...+40 °C <sup>1)</sup>	-20...+65 °C <sup>2)</sup>
LS VAL -600/840/5/IP65	-20...+40 °C <sup>1)</sup>	-20...+65 °C <sup>2)</sup>
LS VAL -600/865/5/IP65	-20...+40 °C <sup>1)</sup>	-20...+65 °C <sup>2)</sup>

<sup>1)</sup> Providing that temperature at T<sub>c</sub> point is below max value during operation

<sup>2)</sup> At the T<sub>c</sub> point

### Lifespan

Product description	Lifespan
LS VAL -600/827/5/IP65	20000 h <sup>1)</sup>
LS VAL -600/830/5/IP65	20000 h <sup>1)</sup>
LS VAL -600/840/5/IP65	20000 h <sup>1)</sup>
LS VAL -600/865/5/IP65	20000 h <sup>1)</sup>

<sup>1)</sup> L70/B50 at T<sub>c</sub> max. 65°C

### Capabilities

Product description	Lowest bending radius	Self-adhesive	Dimmable	Reverse polarity protection
LS VAL -600/827/5/IP65	30 mm	Yes	Yes <sup>1)</sup>	Yes <sup>2)</sup>
LS VAL -600/830/5/IP65	30 mm	Yes	Yes <sup>1)</sup>	Yes <sup>2)</sup>
LS VAL -600/840/5/IP65	30 mm	Yes	Yes <sup>1)</sup>	Yes <sup>2)</sup>
LS VAL -600/865/5/IP65	30 mm	Yes	Yes <sup>1)</sup>	Yes <sup>2)</sup>

<sup>1)</sup> Dimmable with suitable drivers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim)

<sup>2)</sup> Up to maximum 25 V<sub>DC</sub>

**Certificates & standards**

Product description	Salt mist resistance acc. IEC 60068-2-52	UV resistance acc. IEC 60068-2-5	Energy consumption	Energy efficiency class	Type of protection
LS VAL -600/827/5/IP65	No	Yes	7 kWh/1000h <sup>1)</sup>	A+ <sup>1)</sup>	IP65
LS VAL -600/830/5/IP65	No	Yes	7 kWh/1000h <sup>1)</sup>	A+ <sup>1)</sup>	IP65
LS VAL -600/840/5/IP65	No	Yes	7 kWh/1000h <sup>1)</sup>	A+ <sup>1)</sup>	IP65
LS VAL -600/865/5/IP65	No	Yes	7 kWh/1000h <sup>1)</sup>	A+ <sup>1)</sup>	IP65


Product description	Standards
LS VAL -600/827/5/IP65	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
LS VAL -600/830/5/IP65	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
LS VAL -600/840/5/IP65	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547
LS VAL -600/865/5/IP65	Acc. to IEC 62471/Acc. to IEC 60598-1/Acc. to EN 60529/Acc. to EN 62031/Acc. to EN 55015/Acc. to EN 61547

<sup>1)</sup> Value based on first meter of the product


**Logistical data**

Product description	Temperature range at storage
LS VAL -600/827/5/IP65	-20...+85 °C
LS VAL -600/830/5/IP65	-20...+85 °C
LS VAL -600/840/5/IP65	-20...+85 °C
LS VAL -600/865/5/IP65	-20...+85 °C


Light Distribution

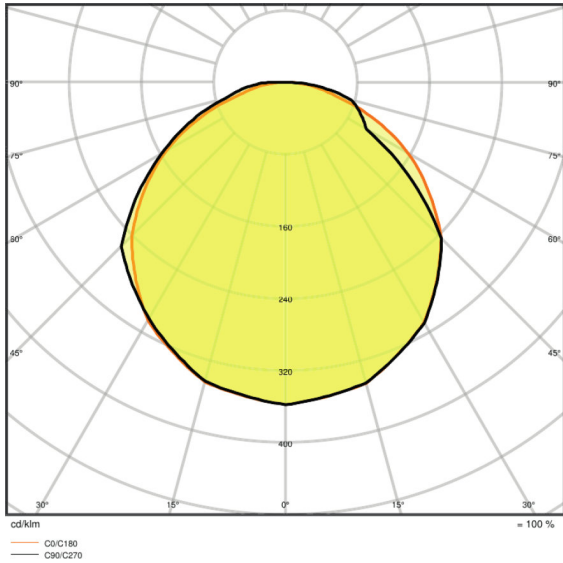


LS VAL -600/827/5/IP65

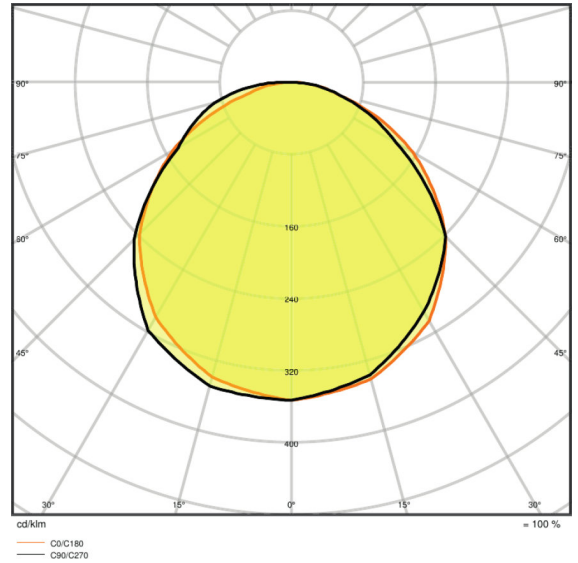

LS VAL -600/830/5/IP65

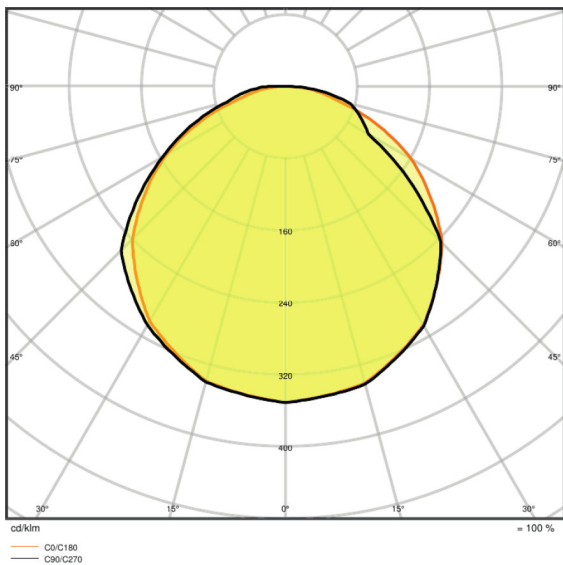

LS VAL -600/840/5/IP65

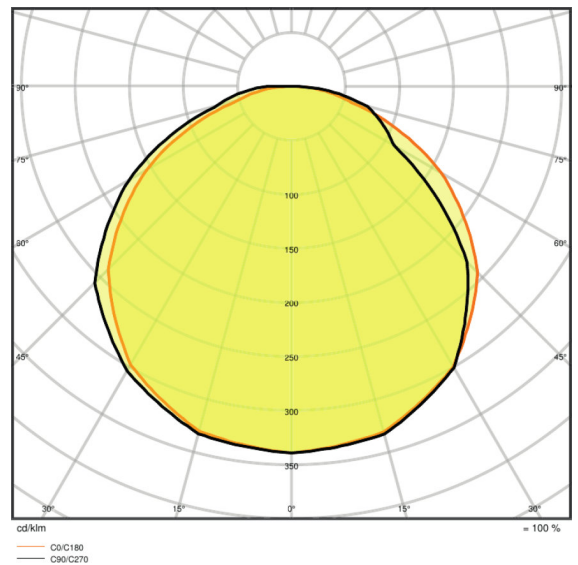

LS VAL -600/865/5/IP65

EQUIPMENT / ACCESSORIES

- Endcaps have to be ordered separately

## APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

## ADDITIONAL PRODUCT INFORMATION

- All the technical parameters apply to the entire LED module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.
- All LED strips have a self-adhesive tape on the reverse side. LED strips can be attached to suitable materials, e.g. aluminum profiles. The surface of the material must be free of grease, oil, silicone and dirt particles. The adhesive tape can be used only one time, if the LED strip will be removed from the mounting surface, there could be a damage of the LED strips and the mounting material. The surface temperature of the mounting material should be in the temperature range of 18°C...35°C. Complete adhesion takes up to 72 h.
- According IPC 6013C – Use A the LED strips are designed for static installation. Vibrations, respective torsion and elongation/compression must be considered.
- In a wide temperature range operation field (e.g. outdoor installation) and a LED strip length with more than 2m suitable mounting surface is required. To avoid stress due to mismatch in expansion of the different materials, there should be an extra thicker adhesive tape between LED strip and mounting surface. Additionally, the LED strip should have enough space for thermal expansion at higher temperatures.
- Compensation due to chemical corrosion is excluded. A suitable protection against corrosive agents such as moisture, condensation etc. must be provided. Hydrogen sulfide (H<sub>2</sub>S) will cause an accelerated corrosion which leads to shortened lifetime or premature failure.
- IP00 LED strips have not surface coating. Consequently, they have no protection against contact and corrosion.
- Installation of the LED strip has to be done by a qualified electrician.
- Handle with care to avoid mechanical product damage
- If the maximum operating and storage temperature ratings will be exceeded, the expected lifetime will be reduced or even the LED strip will be destroyed. It is not allowed to operate the LED strip over the specified T<sub>c</sub> temperature (acc. EN 60598-1 under steady state conditions)
- It is not allowed to exceed the maximum operation voltage. This could cause a hazardous overload and will destroy the LED strip.
- The applicable electrical and safety standards have to be maintained for a LED strip installations
- Pay attention on correct polarity. Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Galvanic Insulation between LED strip and mounting surface must be ensured. This Insulation is needed especially in the area of connections or cut ends.
- In installations of LED strips ESD safety must be taken in account. Adequate precautions during installation and operation for the products are required.
- LED strip can be operated only by a SELV LED driver, which comply with the applicable lighting standards and fits to LED strips rating. A safety operation of the LED strips require a SELV LED driver with an electronically stabilized power supply protection against short circuits, overload and overheating.
- To avoid a damage of the LED strip, the unmounted LED strip should be handled and stored only in the original LEDVANCE packaging (wheel / ESD bag). Repacking is not allowed. Cutted IP 6x LED strips can be stored only with mounted endcaps.

## SALES AND TECHNICAL SUPPORT


Sales and Technical Support [www.ledvance.com](http://www.ledvance.com)

## COUNTRY SPECIFIC INFORMATION

Product description	Product code	METEL-Code	SEG-No.	STK number	UK Org
---------------------	--------------	------------	---------	------------	--------

LS VAL - 600/827/5/IP65	4058075296541	-	-	4246058	-
LS VAL - 600/830/5/IP65	4058075296572	-	-	4246059	-
LS VAL - 600/840/5/IP65	4058075296602	-	-	4246060	-
LS VAL - 600/865/5/IP65	4058075296633	-	-	4246061	-

**DOWNLOAD DATA**

File
 Declarations of conformity EU Declaration of conformity 3594030 LS VAL

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075296558	Shipping carton box 10	300 mm x 280 mm x 285 mm	4941.00 g	23.94 dm <sup>3</sup>
4058075296589	Shipping carton box 10	300 mm x 280 mm x 285 mm	4941.00 g	23.94 dm <sup>3</sup>
4058075296619	Shipping carton box 10	300 mm x 280 mm x 285 mm	4941.00 g	23.94 dm <sup>3</sup>
4058075296640	Shipping carton box 10	300 mm x 280 mm x 285 mm	4941.00 g	23.94 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**ACCESSORIES MANDATORY**

Product description	Accessory name	Accessory code
LS VAL -600/827/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS VAL -600/827/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS VAL -600/827/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS VAL -600/827/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS VAL -600/827/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS VAL -600/827/5/IP65	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS VAL -600/827/5/IP65	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS VAL -600/827/5/IP65	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS VAL -600/827/5/IP65	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS VAL -600/827/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS VAL -600/827/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982



LS VAL -600/827/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS VAL -600/827/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS VAL -600/827/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS VAL -600/827/5/IP65	LED Strip Performance Connectors, -10/SE/P SIL-SEAL	▶ 4058075275751
LS VAL -600/827/5/IP65	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS VAL -600/827/5/IP65	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS VAL -600/827/5/IP65	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS VAL -600/827/5/IP65	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS VAL -600/827/5/IP65	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS VAL -600/827/5/IP65	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS VAL -600/827/5/IP65	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS VAL -600/827/5/IP65	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS VAL -600/827/5/IP65	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS VAL -600/830/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS VAL -600/830/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS VAL -600/830/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS VAL -600/830/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS VAL -600/830/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS VAL -600/830/5/IP65	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS VAL -600/830/5/IP65	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS VAL -600/830/5/IP65	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS VAL -600/830/5/IP65	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS VAL -600/830/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS VAL -600/830/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS VAL -600/830/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS VAL -600/830/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS VAL -600/830/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS VAL -600/840/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS VAL -600/840/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS VAL -600/840/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS VAL -600/840/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS VAL -600/840/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS VAL -600/840/5/IP65	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS VAL -600/840/5/IP65	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS VAL -600/840/5/IP65	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS VAL -600/840/5/IP65	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS VAL -600/840/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS VAL -600/840/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS VAL -600/840/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906

LS VAL -600/840/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS VAL -600/840/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920
LS VAL -600/865/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -40/220-240/24/P	▶ 4058075379183
LS VAL -600/865/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075379206
LS VAL -600/865/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075240087
LS VAL -600/865/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075240124
LS VAL -600/865/5/IP65	LED DRIVER 1-10 V DIM OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240162
LS VAL -600/865/5/IP65	LED DRIVER VALUE, -30/220-240/24	▶ 4058075240063
LS VAL -600/865/5/IP65	LED DRIVER VALUE, -60/220-240/24	▶ 4058075240100
LS VAL -600/865/5/IP65	LED DRIVER VALUE, -120/220-240/24	▶ 4058075240148
LS VAL -600/865/5/IP65	LED DRIVER VALUE, -150/220-240/24	▶ 4058075240186
LS VAL -600/865/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -100/220-240/24/P	▶ 4058075239944
LS VAL -600/865/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -150/220-240/24/P	▶ 4058075239982
LS VAL -600/865/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -30/220-240/24/P	▶ 4058075239906
LS VAL -600/865/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -250/220-240/24/P	▶ 4058075240049
LS VAL -600/865/5/IP65	LED DRIVER OUTDOOR PERFORMANCE, -60/220-240/24/P	▶ 4058075239920

**ACCESSORIES OPTIONAL**

Product description	Accessory name	Accessory code
LS VAL -600/830/5/IP65	LED Strip Performance Connectors, -10/SE/P SIL-SEAL	▶ 4058075275751
LS VAL -600/830/5/IP65	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS VAL -600/830/5/IP65	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS VAL -600/830/5/IP65	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS VAL -600/830/5/IP65	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS VAL -600/830/5/IP65	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS VAL -600/830/5/IP65	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS VAL -600/830/5/IP65	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS VAL -600/830/5/IP65	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS VAL -600/830/5/IP65	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS VAL -600/840/5/IP65	LED Strip Performance Connectors, -10/SE/P SIL-SEAL	▶ 4058075275751
LS VAL -600/840/5/IP65	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS VAL -600/840/5/IP65	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS VAL -600/840/5/IP65	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS VAL -600/840/5/IP65	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS VAL -600/840/5/IP65	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS VAL -600/840/5/IP65	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS VAL -600/840/5/IP65	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS VAL -600/840/5/IP65	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495

LS VAL -600/840/5/IP65	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525
LS VAL -600/865/5/IP65	LED Strip Performance Connectors, -10/SE/P SIL-SEAL	▶ 4058075275751
LS VAL -600/865/5/IP65	LED Strip Profiles Wide, -PW01/U/26X8/14/2	▶ 4058075401464
LS VAL -600/865/5/IP65	LED Strip Profiles Wide, -PW01/U/26X8/14/1	▶ 4058075278127
LS VAL -600/865/5/IP65	LED Strip Profiles Wide, -PW02/UW/39X26/14/1	▶ 4058075278158
LS VAL -600/865/5/IP65	LED Strip Profiles Wide, -PW03/U/26X26/14/1	▶ 4058075278189
LS VAL -600/865/5/IP65	LED Strip Profiles Medium, -PM04/UW/23X15,5/10/1	▶ 4058075278424
LS VAL -600/865/5/IP65	LED Strip Profiles Medium, -PM05/U/17,5X14,5/10/1	▶ 4058075279292
LS VAL -600/865/5/IP65	LED Strip Profiles Medium, -PM06/E/18X18/12/1	▶ 4058075279322
LS VAL -600/865/5/IP65	LED Strip Profiles Wide, -PW02/UW/39X26/14/2	▶ 4058075401495
LS VAL -600/865/5/IP65	LED Strip Profiles Wide, -PW03/U/26X26/14/2	▶ 4058075401525

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.